



# OIL ANALYSIS REPORT

WEAR	<b>SEVERE</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**CHEVROLET 27352-010**  
 Component  
**Gasoline Engine**  
 Fluid  
**{not provided} (--- GAL)**

## RECOMMENDATION

We advise that you inspect for the source(s) of wear.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WCM2278573</b>	---	---
Sample Date		Client Info		<b>16 Jun 2024</b>	---	---
Machine Age	mls	Client Info		<b>0</b>	---	---
Oil Age	mls	Client Info		<b>0</b>	---	---
Filter Age	mls	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>SEVERE</b>	---	---

## WEAR

Bearing and/or bushing wear is indicated.

Iron	ppm	ASTM D5185m	>150	<b>28</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>2</b>	---	---
Titanium	ppm	ASTM D5185m		<b>16</b>	---	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>40	<b>7</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>▲ 931</b>	---	---
Copper	ppm	ASTM D5185m	>155	<b>▲ 364</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>3</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION














There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	<b>18</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	---	---
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol	%	*ASTM D2982		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844		<b>0.1</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>16.8</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>29.1</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

## FLUID CONDITION

The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Sodium	ppm	ASTM D5185m	>400	<b>22</b>	---	---
Boron	ppm	ASTM D5185m		<b>29</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>72</b>	---	---
Manganese	ppm	ASTM D5185m		<b>8</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>715</b>	---	---
Calcium	ppm	ASTM D5185m		<b>1015</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>631</b>	---	---
Zinc	ppm	ASTM D5185m		<b>856</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>2210</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>24.3</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>2.35</b>	---	---
Visc @ 100°C	cSt	ASTM D445		<b>10.7</b>	---	---

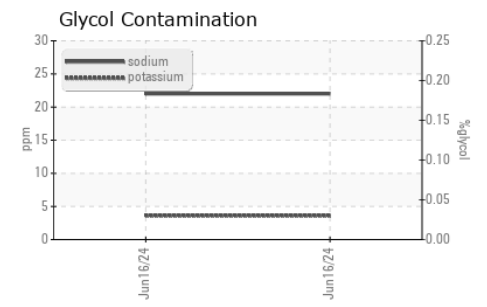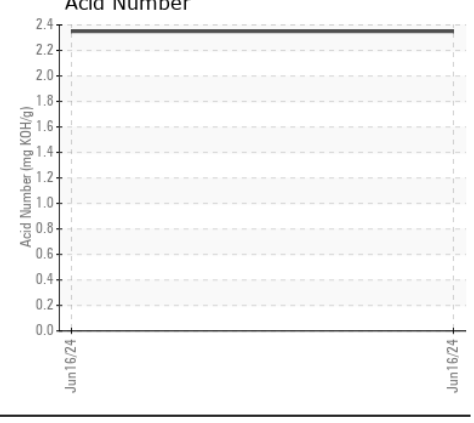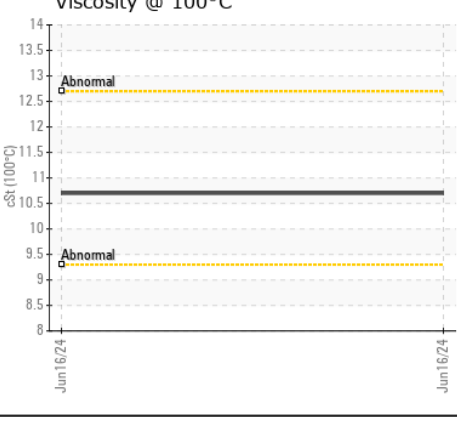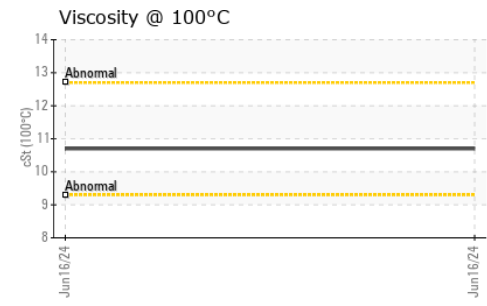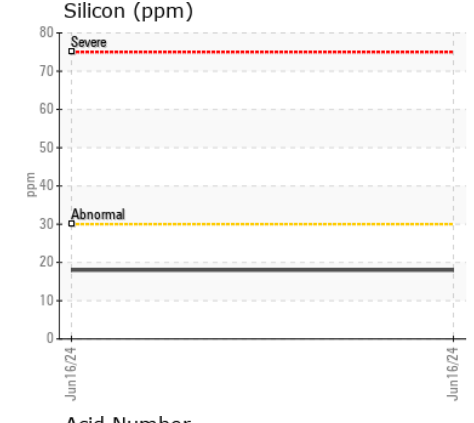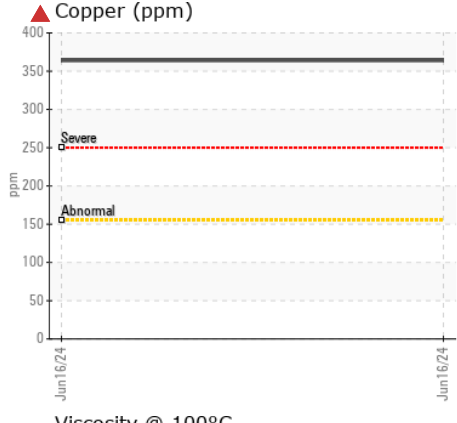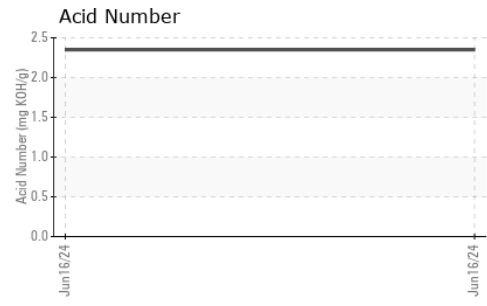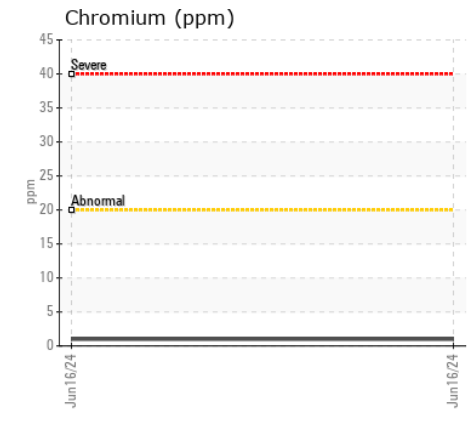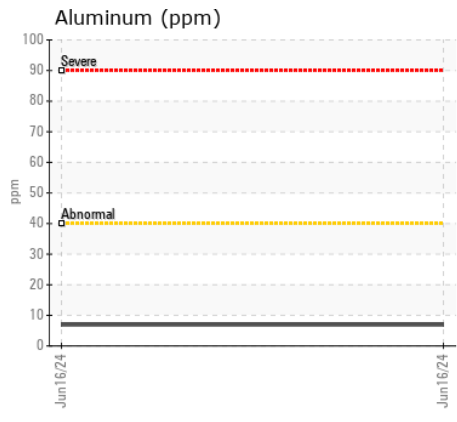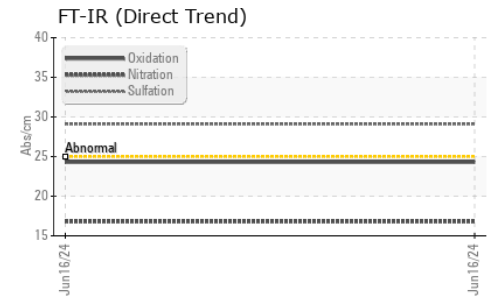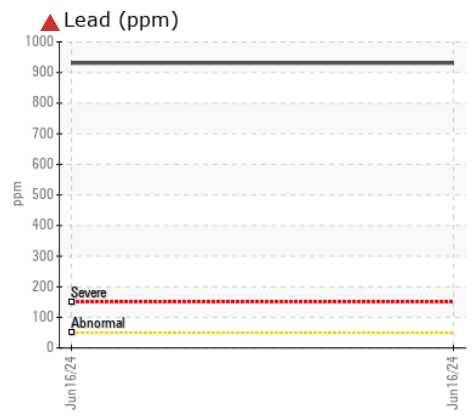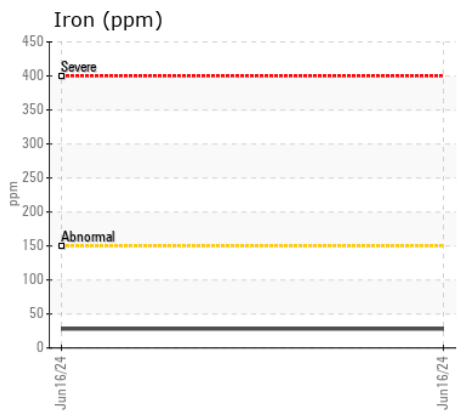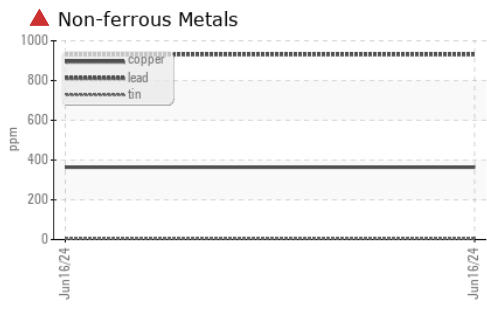

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WCM2278573 **Received** : 17 Jun 2024  
**Lab Number** : 06211922 **Tested** : 20 Jun 2024  
**Unique Number** : 11084786 **Diagnosed** : 20 Jun 2024 - Jonathan Hester  
**Test Package** : MOB 2 ( Additional Tests: Glycol )

**NORTH AMERICAN WEST AUTOMOTIVE FORENSIC SERVICES**  
 PO BOX 2220  
 MISSION VIEJO, CA  
 US 92690  
 Contact: CHAD TREDWAY  
 chad.nawest@gmail.com; northamericanwest@gmail.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)