



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**725**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0844181</b>	WC0778983	WC0778877
Sample Date		Client Info		<b>26 May 2024</b>	18 Sep 2023	17 Apr 2023
Machine Age	hrs	Client Info		<b>3609</b>	2763	2181
Oil Age	hrs	Client Info		<b>450</b>	450	450
Filter Age	hrs	Client Info		<b>450</b>	0	450
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>21</b>	18	30
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>20	<b>14</b>	17	15
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>3</b>	<1	3
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>10</b>	11	18
Potassium	ppm	ASTM D5185m	>20	<b>21</b>	29	18
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.9</b>	9.9	9.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.0</b>	21.8	21.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>4</b>	1	4
Boron	ppm	ASTM D5185m	250	<b>35</b>	36	47
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>1</b>	2	3
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>770</b>	774	810
Calcium	ppm	ASTM D5185m	3000	<b>1420</b>	1358	1436
Phosphorus	ppm	ASTM D5185m	1150	<b>780</b>	754	760
Zinc	ppm	ASTM D5185m	1350	<b>865</b>	847	893
Sulfur	ppm	ASTM D5185m	4250	<b>3577</b>	2977	3787
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.9</b>	16.8	17.7
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.52</b>	7.76	11.02
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.5</b>	13.5	13.7

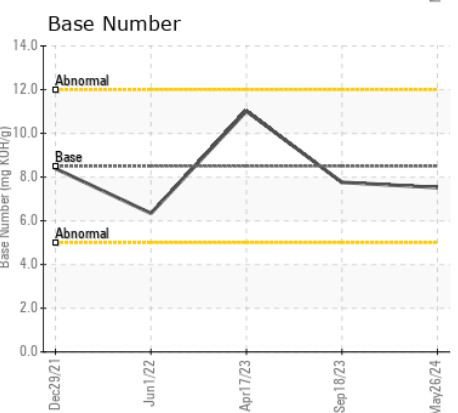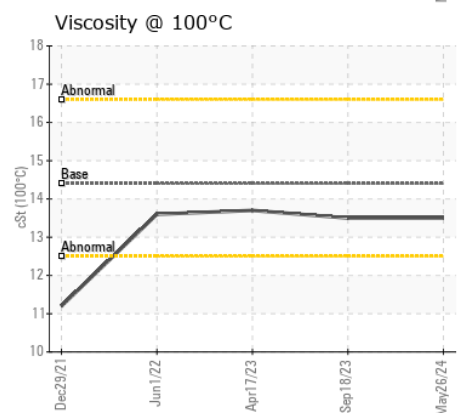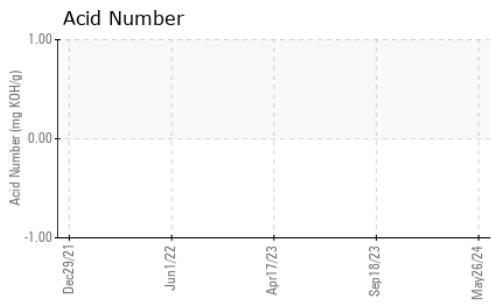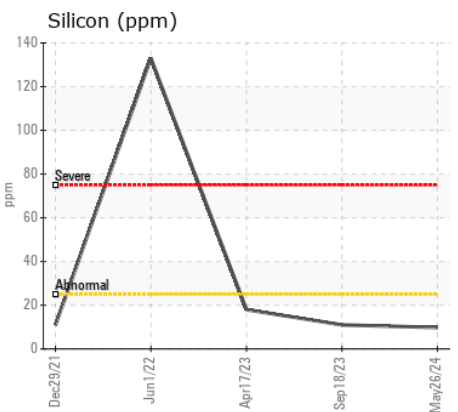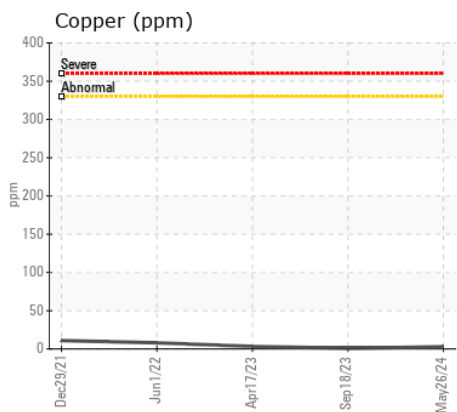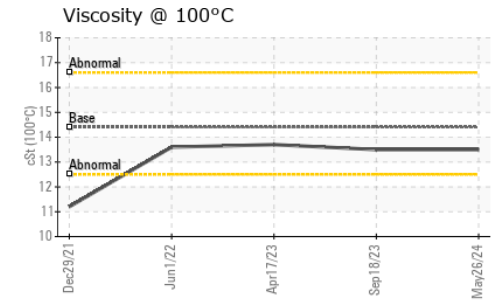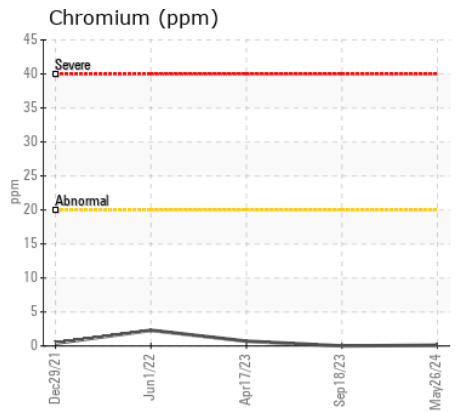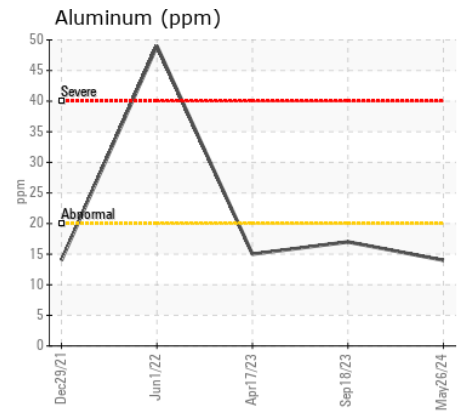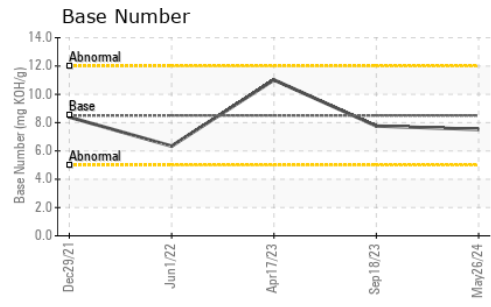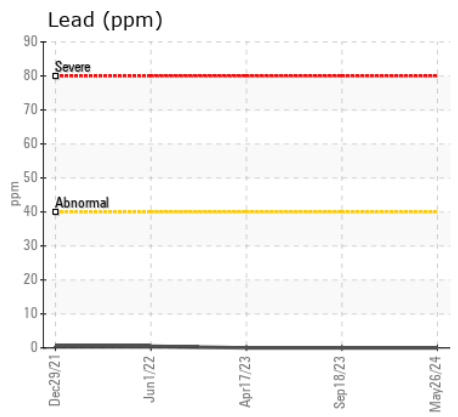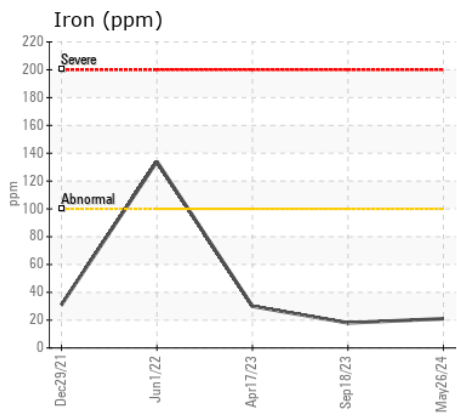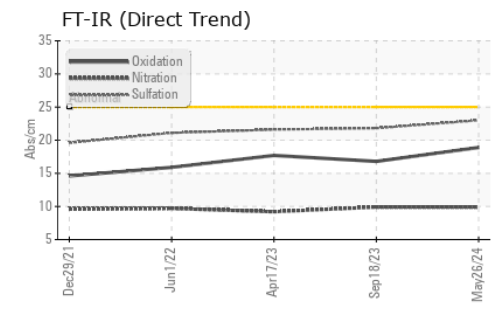

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0844181 **Received** : 17 Jun 2024  
**Lab Number** : 06211939 **Tested** : 19 Jun 2024  
**Unique Number** : 11084803 **Diagnosed** : 19 Jun 2024 - Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: TAN Man )

**LYNDEN TRANSPORT - FIFE**  
 5410 12TH STREET EAST  
 FIFE, WA  
 US 98424  
 Contact: CHESTER ANGLEMYER  
 chestera@ltia.lynden.com  
 T: (253)926-7245  
 F: (253)926-7249

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)