



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
781
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (38 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0844130	WCM2253605	---
Sample Date		Client Info		31 Jan 2024	12 Jun 2015	---
Machine Age	hrs	Client Info		9828	300	---
Oil Age	hrs	Client Info		500	300	---
Filter Age	hrs	Client Info		500	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	52	15	---
Chromium	ppm	ASTM D5185m	>20	1	2	---
Nickel	ppm	ASTM D5185m	>2	<1	<1	---
Titanium	ppm	ASTM D5185m	>2	83	124	---
Silver	ppm	ASTM D5185m	>2	<1	0	---
Aluminum	ppm	ASTM D5185m	>30	17	15	---
Lead	ppm	ASTM D5185m	>30	0	0	---
Copper	ppm	ASTM D5185m	>30	4	87	---
Tin	ppm	ASTM D5185m	>15	0	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION


There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	13	5	---
Potassium	ppm	ASTM D5185m	>20	8	27	---
Fuel		WC Method	>3.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	9.9	5.	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.5	15.	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	10	5	---
Boron	ppm	ASTM D5185m	250	117	88	---
Barium	ppm	ASTM D5185m	10	0	0	---
Molybdenum	ppm	ASTM D5185m	100	4	3	---
Manganese	ppm	ASTM D5185m		1	<1	---
Magnesium	ppm	ASTM D5185m	450	411	421	---
Calcium	ppm	ASTM D5185m	3000	1791	2412	---
Phosphorus	ppm	ASTM D5185m	1150	1017	1385	---
Zinc	ppm	ASTM D5185m	1350	1219	1584	---
Sulfur	ppm	ASTM D5185m	4250	4446	2908	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.8	10.	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.56	9.33	---
Visc @ 100°C	cSt	ASTM D445	14.4	14.7	15.01	---

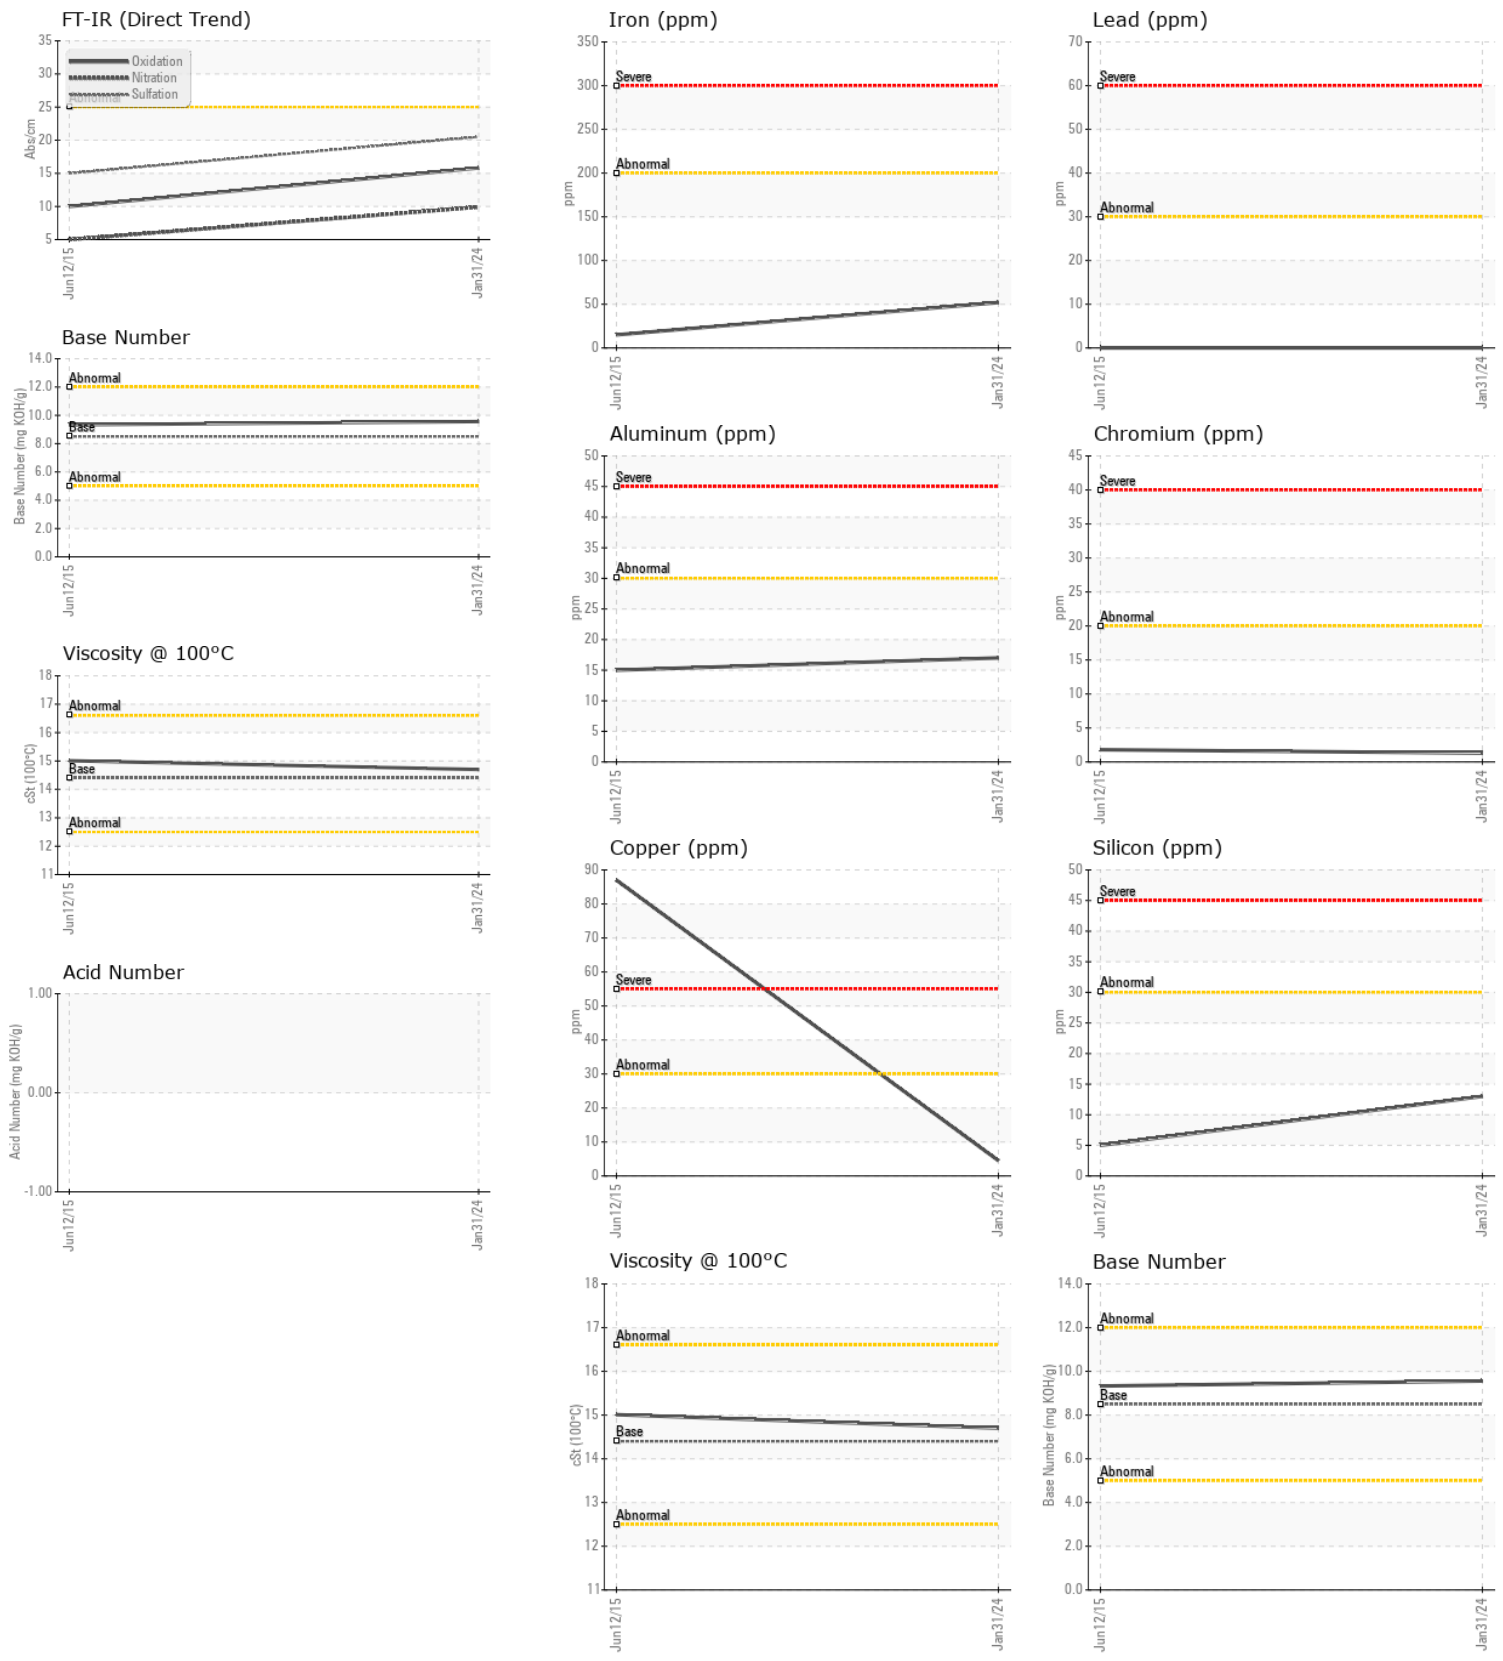

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0844130 **Received** : 17 Jun 2024
Lab Number : 06211949 **Tested** : 19 Jun 2024
Unique Number : 11084813 **Diagnosed** : 19 Jun 2024 - Don Baldrige
Test Package : MOB 2 (Additional Tests: TAN Man)

LYNDEN TRANSPORT - FIFE
 5410 12TH STREET EAST
 FIFE, WA
 US 98424
 Contact: CHESTER ANGLEMYER
 chestera@ltia.lynden.com
 T: (253)926-7245
 F: (253)926-7249

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)