



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 844L 1DW844LXVNL715689
 Component
Front Differential
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0007509	WE0005262	WE0005360
Sample Date		Client Info		12 Jun 2024	13 Mar 2024	09 Nov 2023
Machine Age	hrs	Client Info		4488	4003	3197
Oil Age	hrs	Client Info		0	500	0
Filter Age	hrs	Client Info		0	500	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		39	218	183
Iron	ppm	ASTM D5185m	>500	101	524	432
Chromium	ppm	ASTM D5185m	>10	<1	2	2
Nickel	ppm	ASTM D5185m	>10	1	4	3
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	1	2	2
Lead	ppm	ASTM D5185m	>25	2	11	10
Copper	ppm	ASTM D5185m	>100	37	▲ 199	▲ 177
Tin	ppm	ASTM D5185m	>10	<1	5	3
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	10	13	18
Potassium	ppm	ASTM D5185m	>20	2	<1	3
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	4	0
Boron	ppm	ASTM D5185m	6	1	9	10
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	3	4
Manganese	ppm	ASTM D5185m		3	13	13
Magnesium	ppm	ASTM D5185m	145	101	89	94
Calcium	ppm	ASTM D5185m	3570	3585	3466	3591
Phosphorus	ppm	ASTM D5185m	1290	1104	1020	1100
Zinc	ppm	ASTM D5185m	1640	1302	1237	1327
Sulfur	ppm	ASTM D5185m		4230	3840	3888
Visc @ 40°C	cSt	ASTM D445	57.0	53.6	50.2	55.4

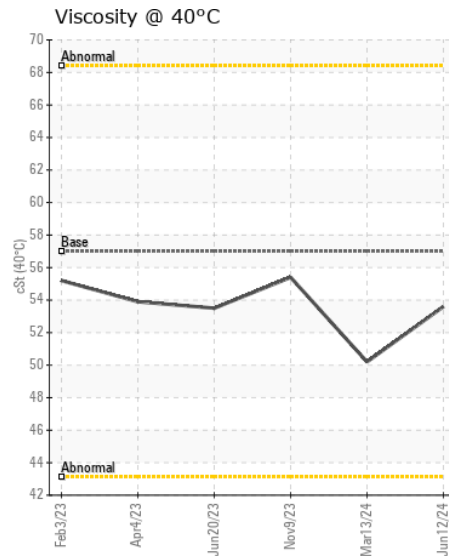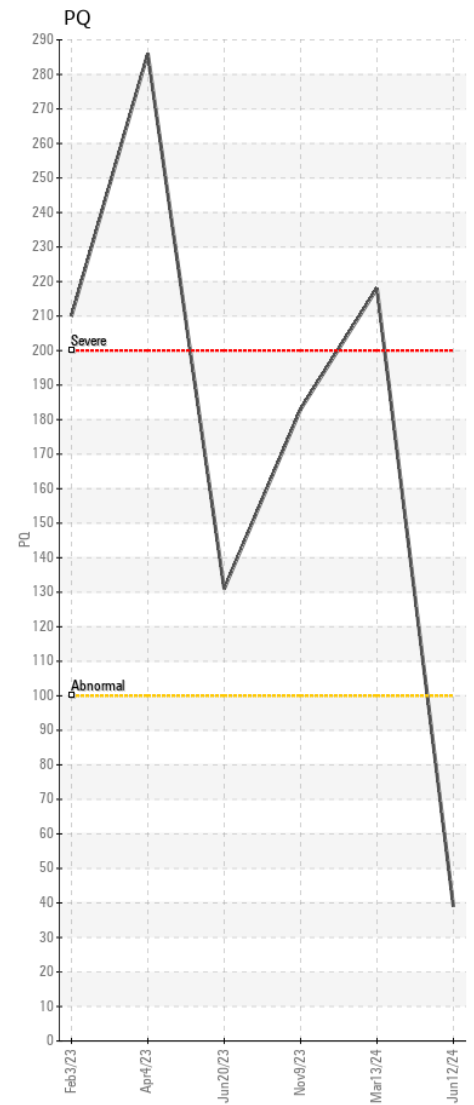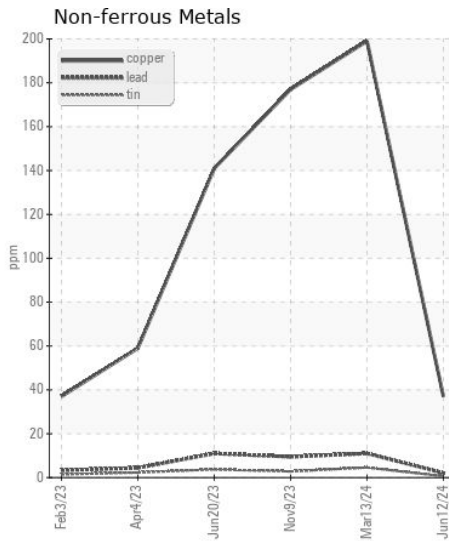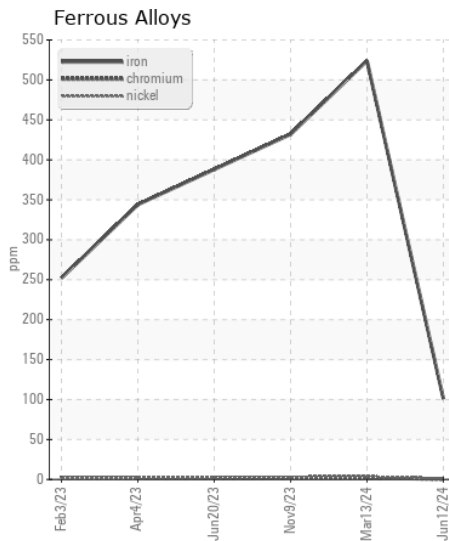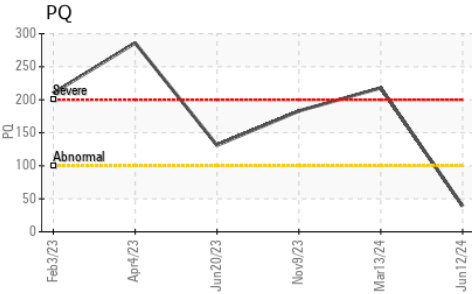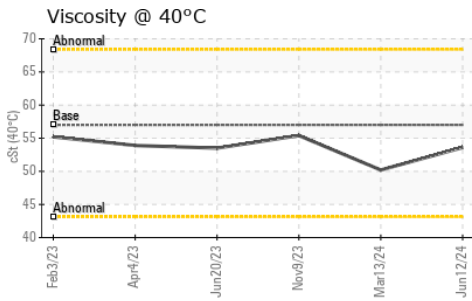

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0007509 **Received** : 17 Jun 2024
Lab Number : 06212000 **Tested** : 18 Jun 2024
Unique Number : 11084864 **Diagnosed** : 18 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

WARRIOR TRACTOR AND EQUIPMENT - MONROEVILLE
 66 INDUSTRIAL PARK DR
 MONROEVILLE, AL
 US 36460
 Contact: SCOTT WILLIAMSON
 swilliamson@warriortractor.com
 T: (251)575-7111
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)