



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[05W47448]

Machine Id

JOHN DEERE 1T0700LXTRF460773

Component

Left Final Drive

Fluid

JOHN DEERE HY-GARD HYD/TRANS (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please note that this is a corrected copy.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0218641	JR0210976	---
Sample Date		Client Info		14 Jun 2024	29 Mar 2024	---
Machine Age	hrs	Client Info		993	486	---
Oil Age	hrs	Client Info		993	486	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	73	121	---
Iron	ppm	ASTM D5185m	>750	93	158	---
Chromium	ppm	ASTM D5185m	>9	2	3	---
Nickel	ppm	ASTM D5185m	>10	<1	2	---
Titanium	ppm	ASTM D5185m		<1	1	---
Silver	ppm	ASTM D5185m		<1	<1	---
Aluminum	ppm	ASTM D5185m	>40	3	3	---
Lead	ppm	ASTM D5185m	>15	<1	2	---
Copper	ppm	ASTM D5185m	>40	1	2	---
Tin	ppm	ASTM D5185m	>10	0	1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	22	21	---
Potassium	ppm	ASTM D5185m	>20	4	4	---
Water		WC Method	>0.075	NEG	NEG	---
Silt	scalar	*Visual	NONE	MODER	LIGHT	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	4	3	---
Boron	ppm	ASTM D5185m	6	3	3	---
Barium	ppm	ASTM D5185m	0	<1	0	---
Molybdenum	ppm	ASTM D5185m	0	0	1	---
Manganese	ppm	ASTM D5185m		3	4	---
Magnesium	ppm	ASTM D5185m	145	100	104	---
Calcium	ppm	ASTM D5185m	3570	3422	3447	---
Phosphorus	ppm	ASTM D5185m	1290	1027	1042	---
Zinc	ppm	ASTM D5185m	1640	1229	1251	---
Sulfur	ppm	ASTM D5185m		4021	3886	---
Visc @ 40°C	cSt	ASTM D445	57.0	52.0	54.3	---

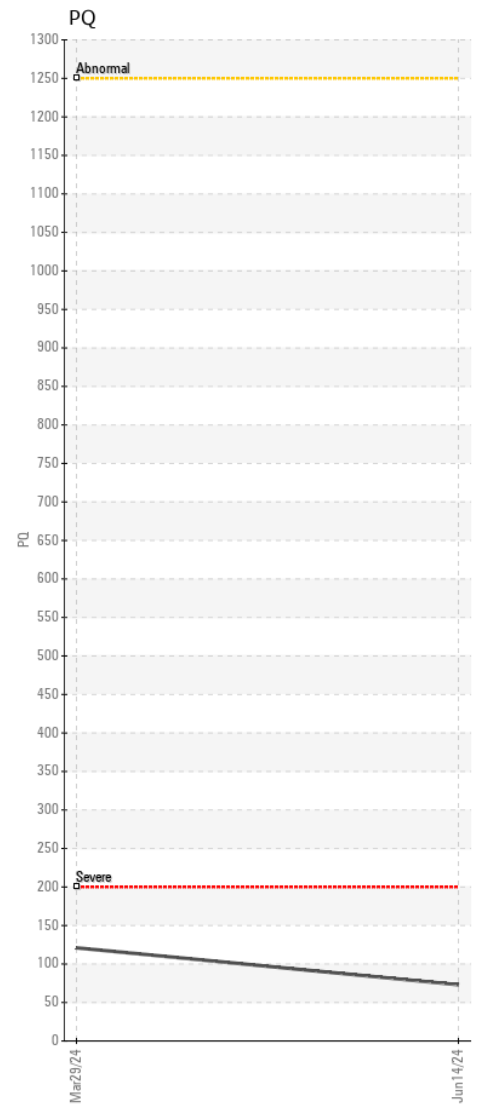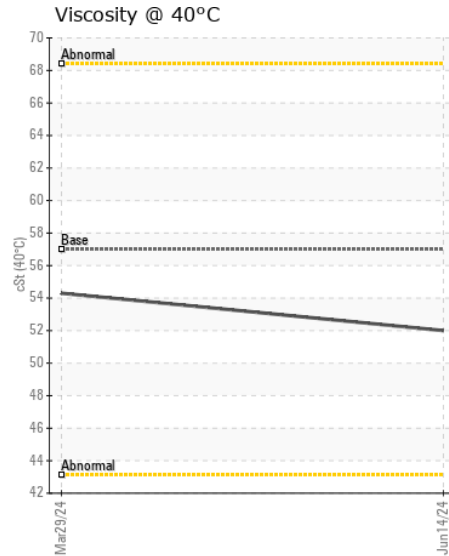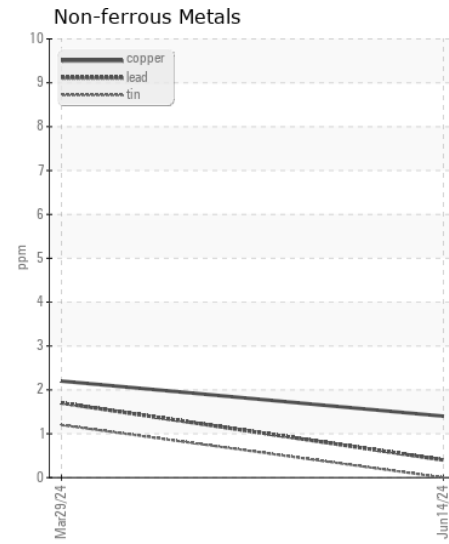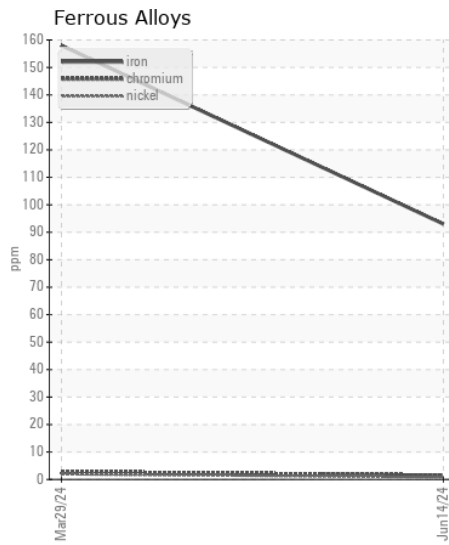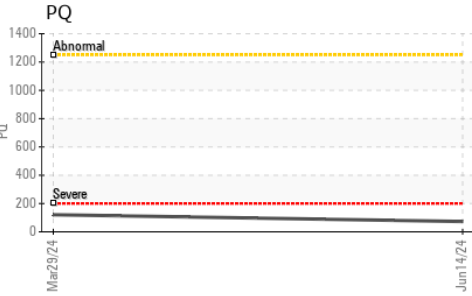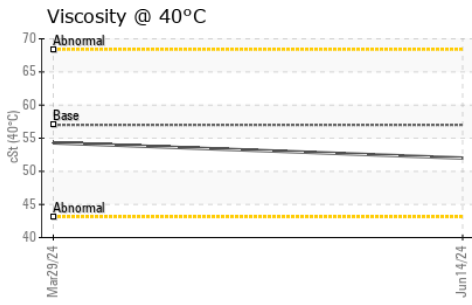

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0218641 **Received** : 17 Jun 2024
Lab Number : 06212053 **Tested** : 18 Jun 2024
Unique Number : 11084917 **Diagnosed** : 19 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

CWS-STRITTMATTER
 9102 OWENS DR
 MANASSAS PARK, VA
 US 20111

Contact: EDDIE GARRETSON
 egarretson@strittmattercompanies.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (703)335-2255
 F: (703)335-8095