



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 85G 1FF085GXKMJ022386

Component
Diesel Engine

Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0207337	JR0178673	JR0171029
Sample Date		Client Info		09 Jun 2024	10 Aug 2023	17 Jul 2023
Machine Age	hrs	Client Info		1989	1752	1718
Oil Age	hrs	Client Info		0	500	1718
Filter Age	hrs	Client Info		0	500	1718
Oil Changed		Client Info		N/A	Changed	Not Changd
Filter Changed		Client Info		N/A	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		20	---	---
Iron	ppm	ASTM D5185m	>80	9	4	4
Chromium	ppm	ASTM D5185m	>6	0	0	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	<1
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	6	<1	1
Lead	ppm	ASTM D5185m	>95	0	<1	<1
Copper	ppm	ASTM D5185m	>85	<1	<1	7
Tin	ppm	ASTM D5185m	>9	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION














There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	12	5	6
Potassium	ppm	ASTM D5185m	>20	4	1	3
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.3	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	7.8	5.3	4.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.9	17.8	17.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	0	<1
Boron	ppm	ASTM D5185m		211	0	5
Barium	ppm	ASTM D5185m		0	2	0
Molybdenum	ppm	ASTM D5185m		219	64	61
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		803	945	1044
Calcium	ppm	ASTM D5185m		1434	1166	1165
Phosphorus	ppm	ASTM D5185m		919	1055	1109
Zinc	ppm	ASTM D5185m		1066	1242	1352
Sulfur	ppm	ASTM D5185m		3491	3430	4026
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.4	13.7	13.5
Base Number (BN)	mg KOH/g	ASTM D2896		9.4	9.8	9.9
Visc @ 100°C	cSt	ASTM D445		13.84	14.2	14.7

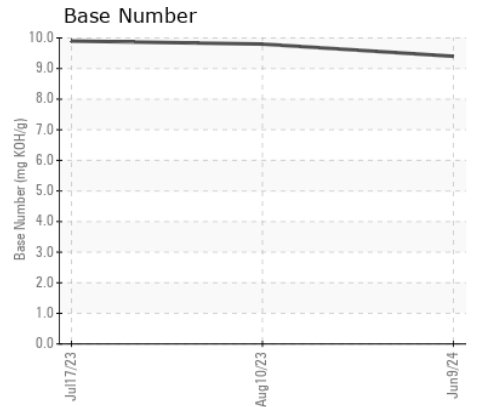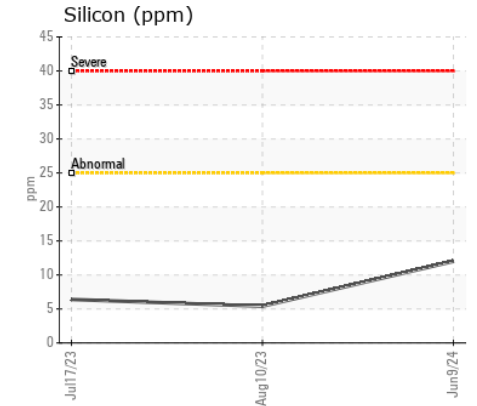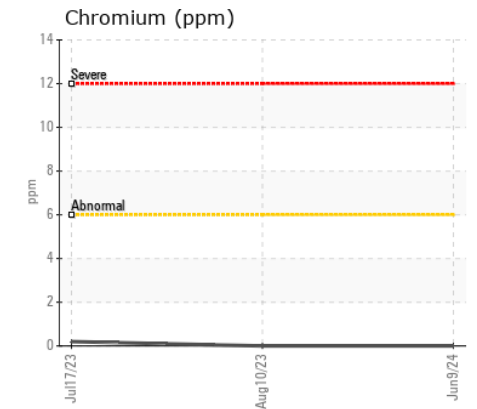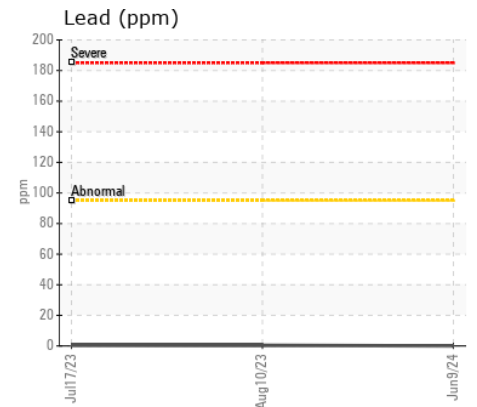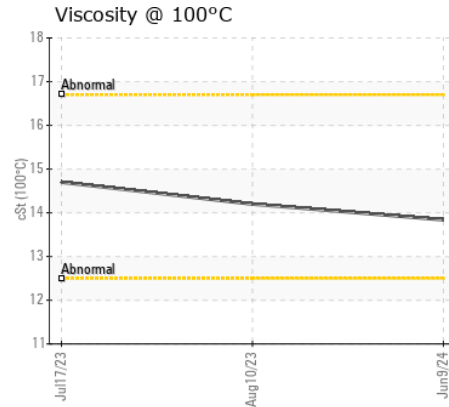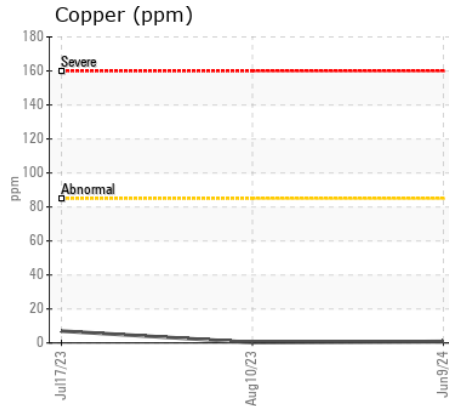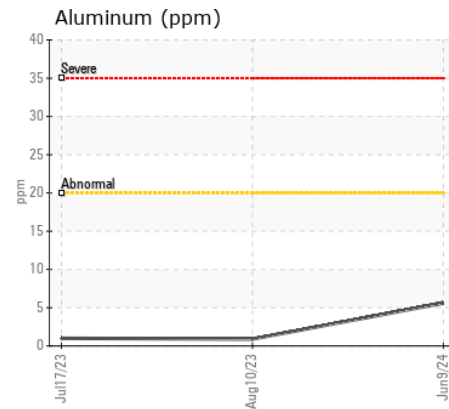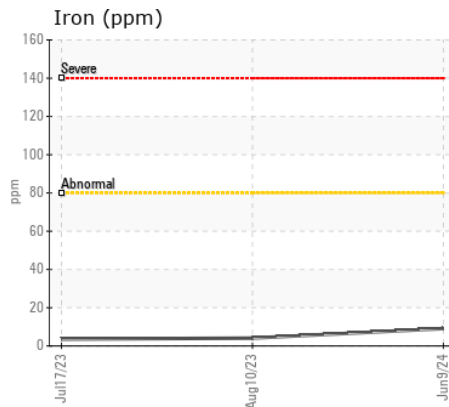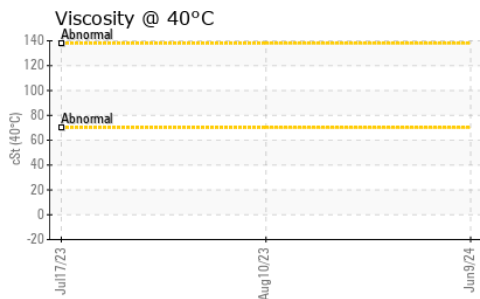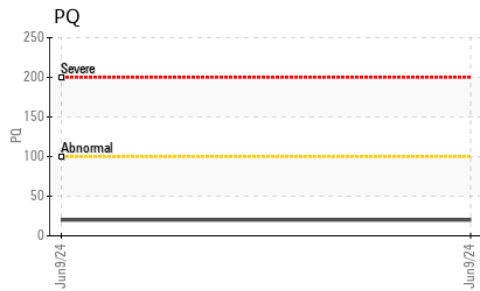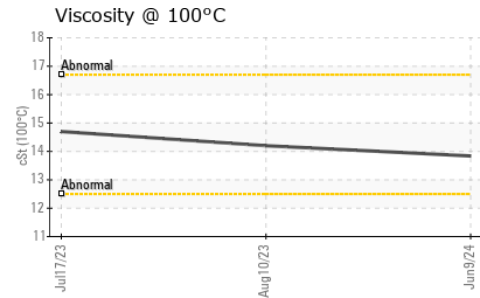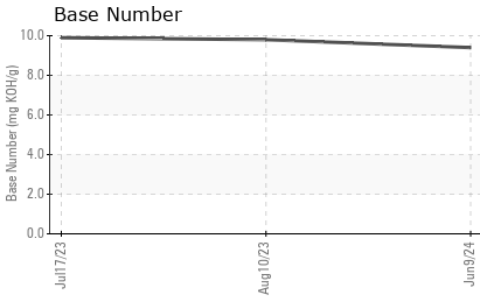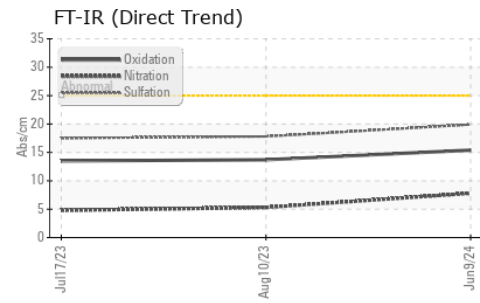

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0207337 **Received** : 17 Jun 2024
Lab Number : 06212054 **Tested** : 21 Jun 2024
Unique Number : 11084918 **Diagnosed** : 21 Jun 2024 - Jonathan Hester
Test Package : MOBCE (Additional Tests: KV40, PQ, TBN)

KING AND SON EXCAVATING
 2360 WINTER GREEN DR
 RADFORD, VA
 US 24141
 Contact: Service Manager
 KINGANDSONS@GMAIL.COM
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)