



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Machine Id
BELL B93A631EE03010094
Component
Front Left Final Drive
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		BE0009129	---	---
Sample Date		Client Info		10 Jun 2024	---	---
Machine Age	hrs	Client Info		2028	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>3000	34	---	---
Iron	ppm	ASTM D5185m	>HR:1=	75	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	<1	---	---
Copper	ppm	ASTM D5185m	>50	19	---	---
Tin	ppm	ASTM D5185m	>10	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>201	8	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>1.01	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>1.01	NEG	---	---

FLUID CONDITION

The oil viscosity is higher than normal. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	<1	---	---
Boron	ppm	ASTM D5185m	400	74	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	1	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	12	7	---	---
Calcium	ppm	ASTM D5185m	150	18	---	---
Phosphorus	ppm	ASTM D5185m	1650	702	---	---
Zinc	ppm	ASTM D5185m	125	27	---	---
Sulfur	ppm	ASTM D5185m	22500	22337	---	---
Visc @ 40°C	cSt	ASTM D445	143	265	---	---

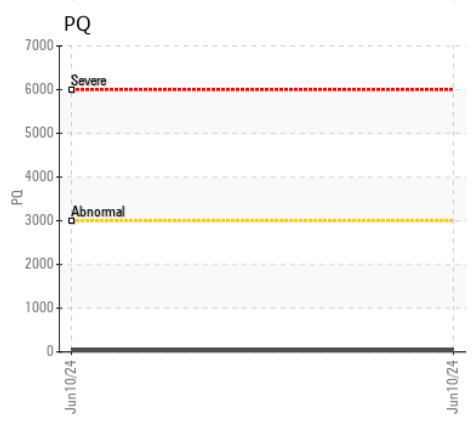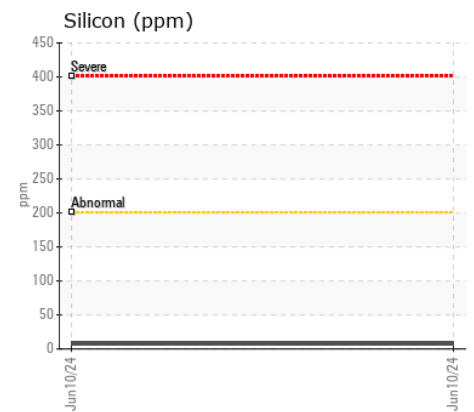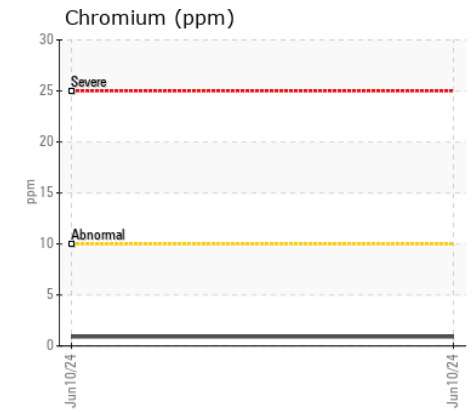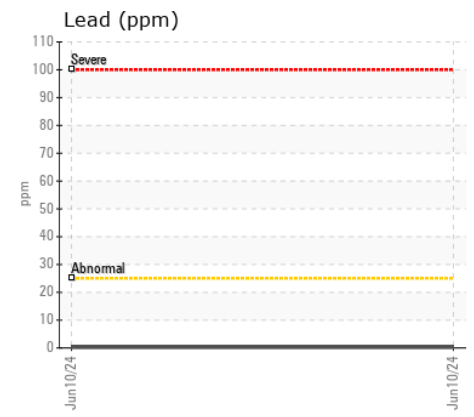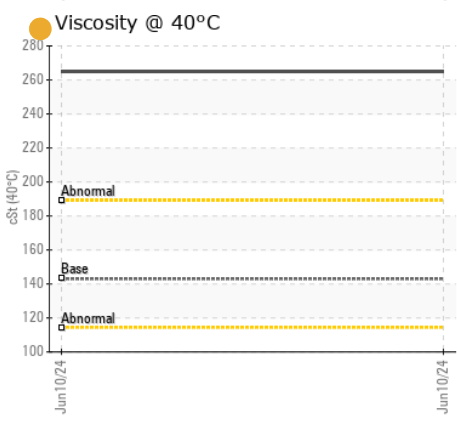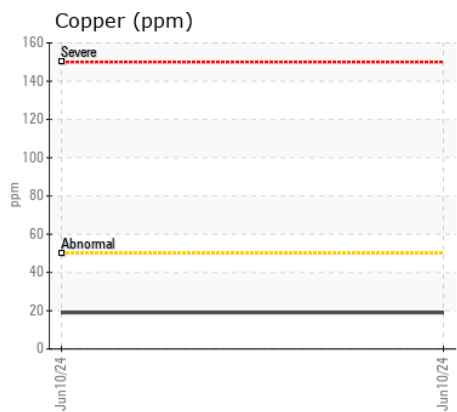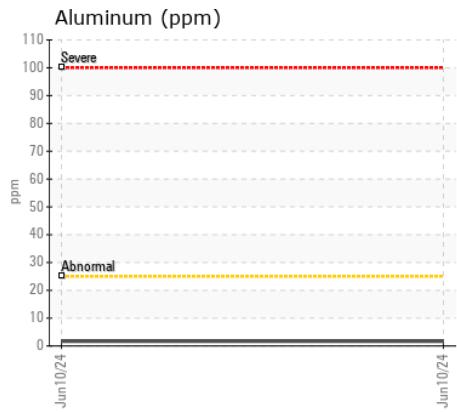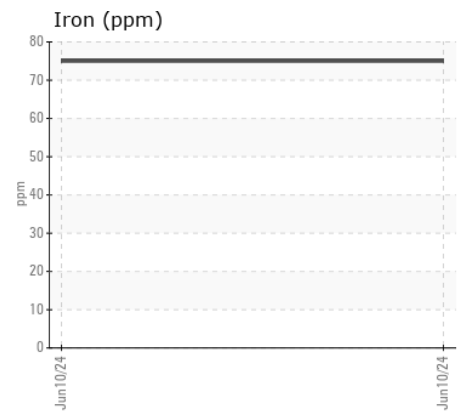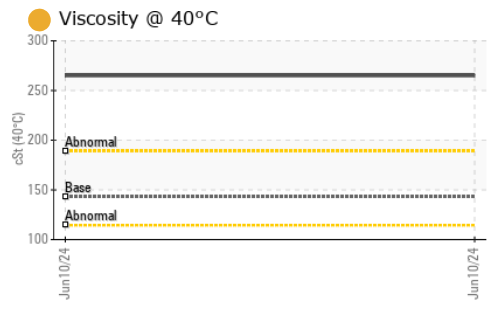

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : BE0009129
Lab Number : 06212087
Unique Number : 11084951
Test Package : MOBCE

Received : 17 Jun 2024
Tested : 18 Jun 2024
Diagnosed : 19 Jun 2024 - Don Baldrige

National Equipment Dealers LLC NE
 215 Woodside Drive
 Lexington, NC
 US 27292

Contact: Steven Gawthrop
 sgawthrop@nedealers.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: