



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**KEMP QUARRIES / HULBERT**  
Machine Id  
**OHT047**  
Component  
**Rear Right Final Drive**  
Fluid  
**MOBIL MOBILTRANS HD 50 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0085945</b>	PCA0109290	PCA0086827
Sample Date		Client Info		<b>07 Jun 2024</b>	06 Jan 2024	15 Sep 2023
Machine Age	hrs	Client Info		<b>37981</b>	37484	37028
Oil Age	hrs	Client Info		<b>497</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>800	<b>63</b>	59	48
Chromium	ppm	ASTM D5185m	>10	<b>1</b>	0	0
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>75	<b>4</b>	1	0
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m	>75	<b>7</b>	19	16
Tin	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	<b>25</b>	18	17
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>1</b>	3	2
Boron	ppm	ASTM D5185m		<b>12</b>	<1	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>3</b>	3	3
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m		<b>38</b>	53	59
Calcium	ppm	ASTM D5185m		<b>3314</b>	3180	3226
Phosphorus	ppm	ASTM D5185m		<b>872</b>	957	1032
Zinc	ppm	ASTM D5185m		<b>1171</b>	1179	1284
Sulfur	ppm	ASTM D5185m		<b>5545</b>	4006	4444
Visc @ 40°C	cSt	ASTM D445	195	<b>183</b>	175	176

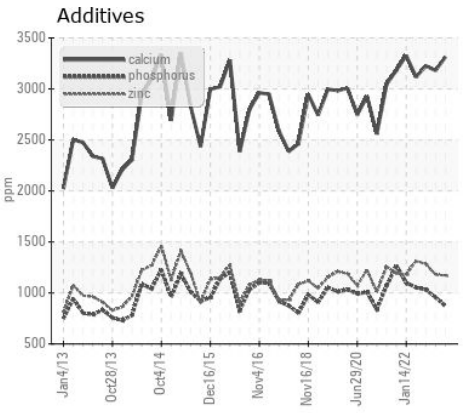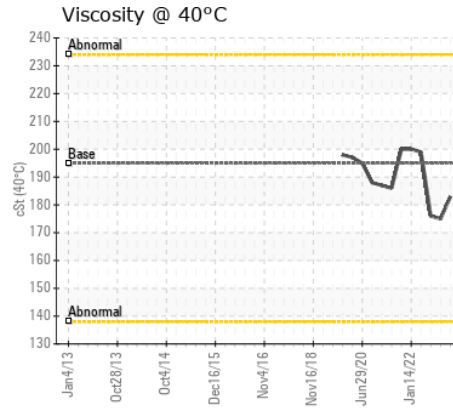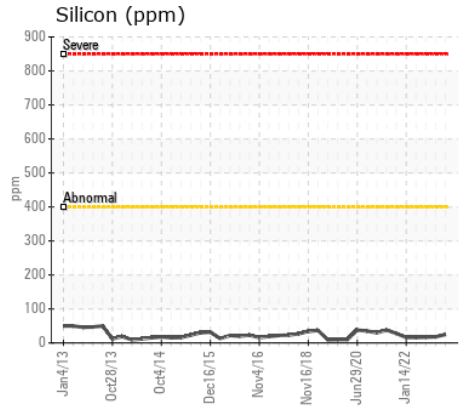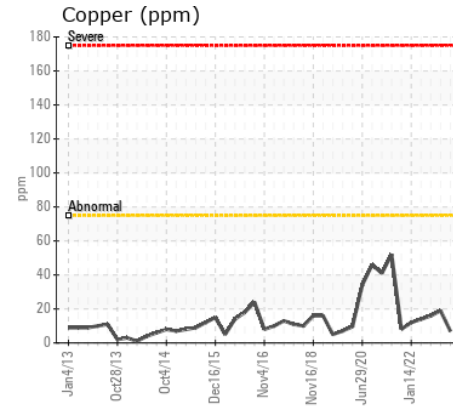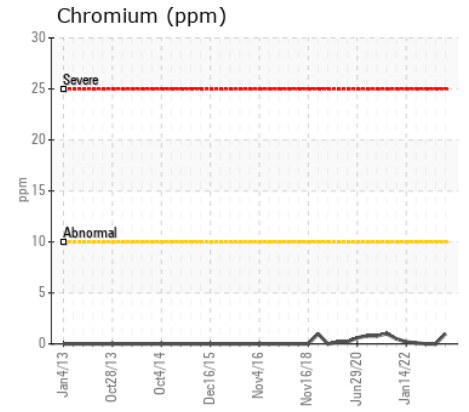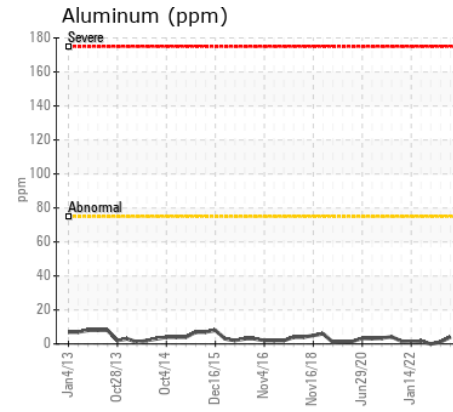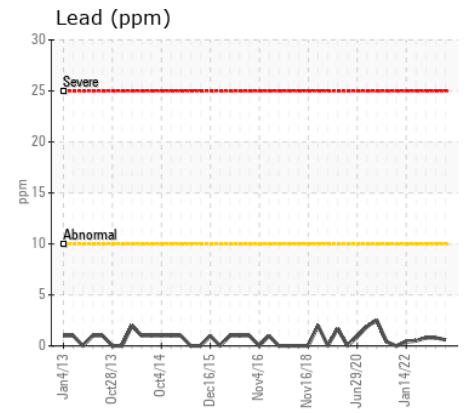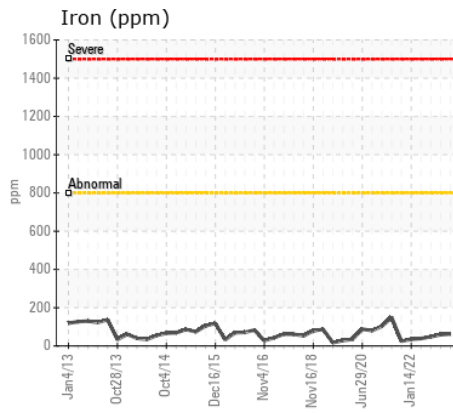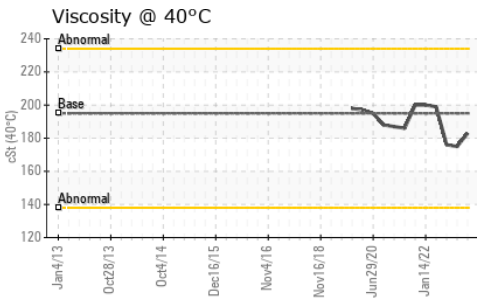

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0085945  
**Lab Number** : 06212104  
**Unique Number** : 11084968  
**Test Package** : MOB 1

**Received** : 17 Jun 2024  
**Tested** : 18 Jun 2024  
**Diagnosed** : 18 Jun 2024 - Wes Davis

**Kemp Quarries - Kemp Stone - Hulbert**  
 17801 Hwy 80  
 Hulbert, OK  
 US 74441

Contact: hulbert@kempstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: