



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[SWO-072820]
 Machine Id
VOLVO EC480E 314146
 Component
Rear Left Final Drive
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP443970	VCP440678	VCP419105
Sample Date		Client Info		12 Jun 2024	31 Jan 2024	28 Aug 2023
Machine Age	hrs	Client Info		7399	6892	6421
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Changed
Filter Changed		Client Info		Not Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>3360	54	43	50
Chromium	ppm	ASTM D5185m	>35	2	1	<1
Nickel	ppm	ASTM D5185m	>8	<1	<1	0
Titanium	ppm	ASTM D5185m	>15	<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>185	2	<1	1
Lead	ppm	ASTM D5185m	>5	<1	<1	0
Copper	ppm	ASTM D5185m	>80	<1	<1	0
Tin	ppm	ASTM D5185m	>8	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>1100	8	5	7
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	<1	0	<1
Boron	ppm	ASTM D5185m	400	62	88	137
Barium	ppm	ASTM D5185m	200	0	0	0
Molybdenum	ppm	ASTM D5185m	12	3	3	1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	12	18	23	24
Calcium	ppm	ASTM D5185m	150	39	46	67
Phosphorus	ppm	ASTM D5185m	1650	813	1065	1002
Zinc	ppm	ASTM D5185m	125	78	65	69
Sulfur	ppm	ASTM D5185m	22500	19564	23891	25924
Visc @ 40°C	cSt	ASTM D445	143	141	153	222

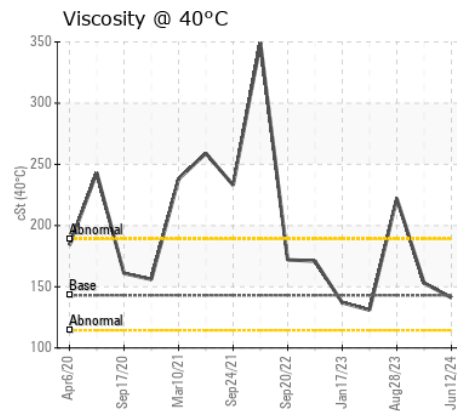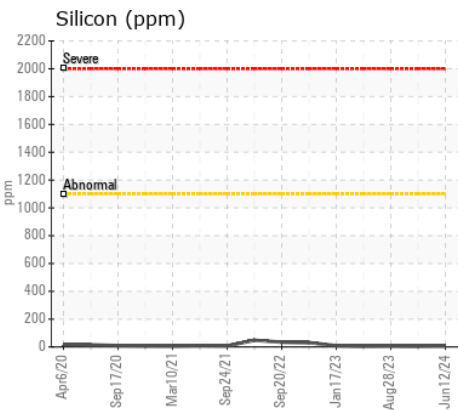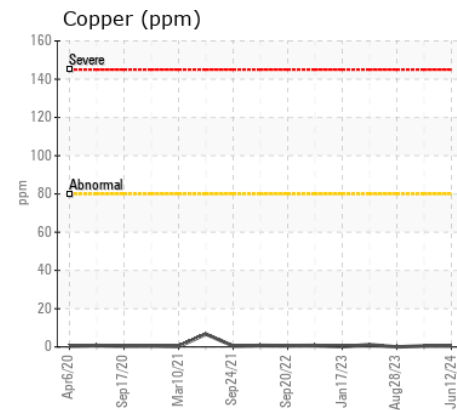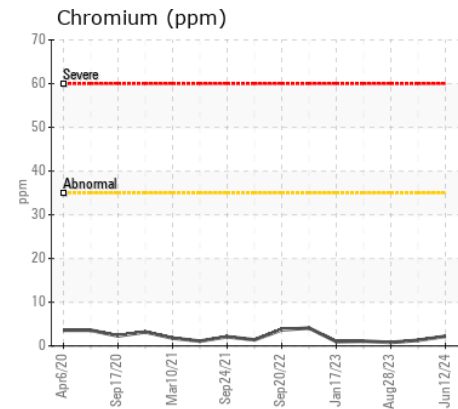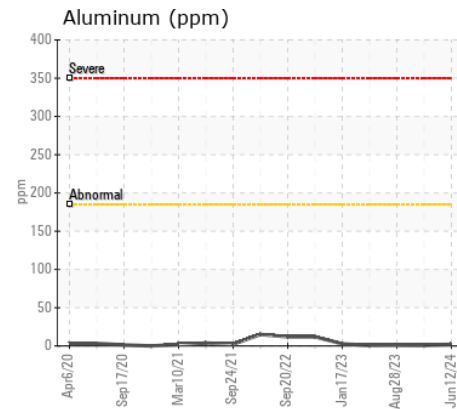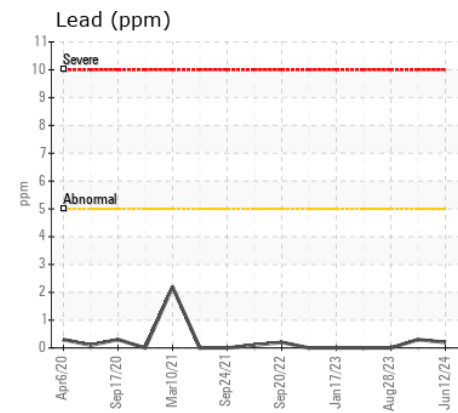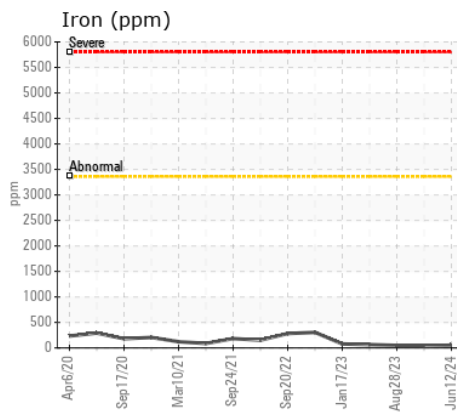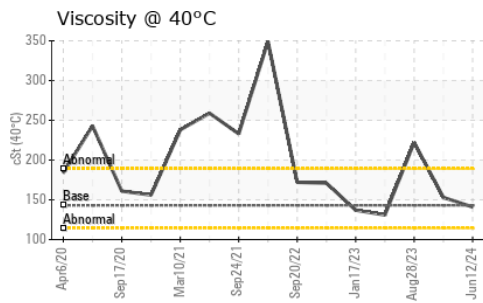

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP443970 **Received** : 17 Jun 2024
Lab Number : 06212149 **Tested** : 19 Jun 2024
Unique Number : 11085013 **Diagnosed** : 19 Jun 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: PQ)

SAIIA CONSTRUCTION LLC
 4400 LEWISBURG RD
 BIRMINGHAM, AL
 US 35207

Contact: STEPHANI BRITTON
 sbritton@saiia.com;doug.bogart@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (205)943-2268
 F: (205)943-2269