



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A40G 352566
Component
Bogie/Center Axle
Fluid
MOBIL MOBILUBE HD 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP445500	VCP435160	VCP341886
Sample Date		Client Info		06 Jun 2024	02 Apr 2024	11 Dec 2023
Machine Age	hrs	Client Info		6165	5666	5026
Oil Age	hrs	Client Info		499	1082	442
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	10	84	10
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	<1	0
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>150	3	64	0
Tin	ppm	ASTM D5185m	>20	0	10	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	2	11	2
Potassium	ppm	ASTM D5185m	>20	1	<1	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	3	0
Boron	ppm	ASTM D5185m		169	202	160
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		3	6	0
Manganese	ppm	ASTM D5185m		0	2	<1
Magnesium	ppm	ASTM D5185m		18	11	10
Calcium	ppm	ASTM D5185m		232	234	234
Phosphorus	ppm	ASTM D5185m		1040	1067	961
Zinc	ppm	ASTM D5185m		110	92	103
Sulfur	ppm	ASTM D5185m		23308	28649	22771
Visc @ 40°C	cSt	ASTM D445	136	133	137	136

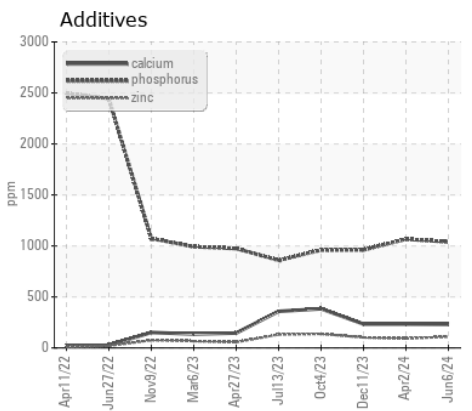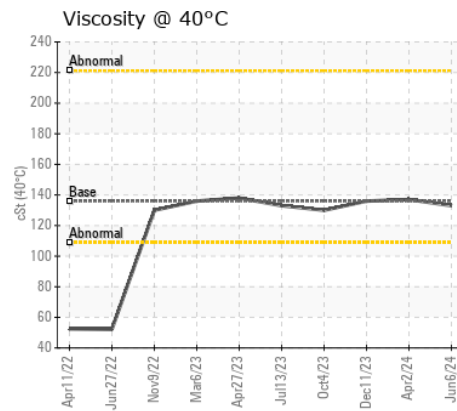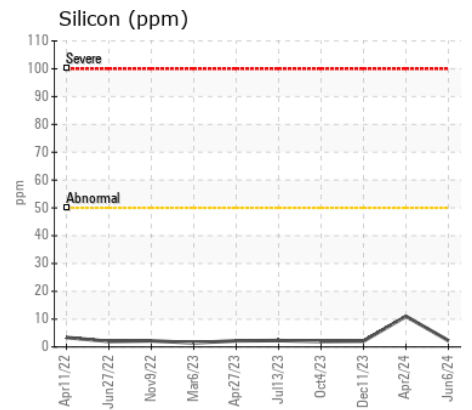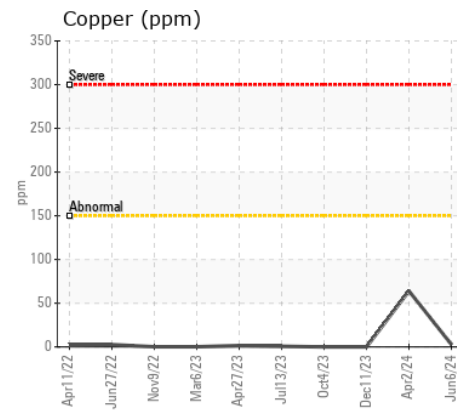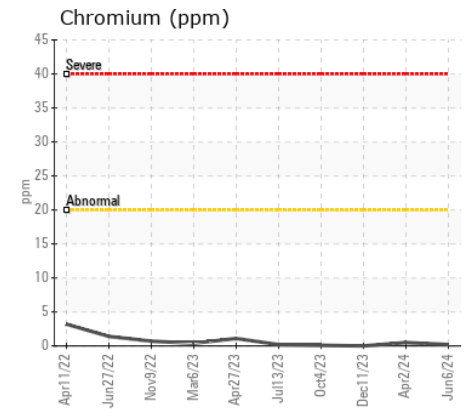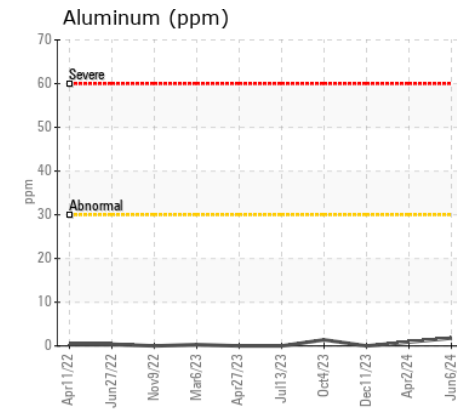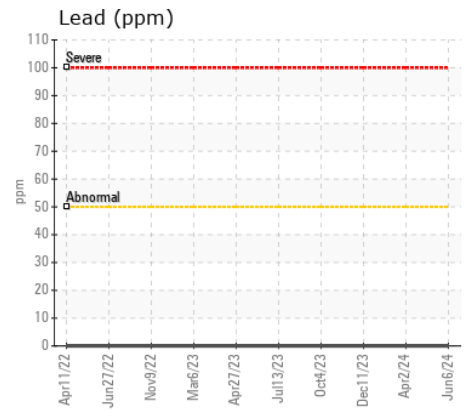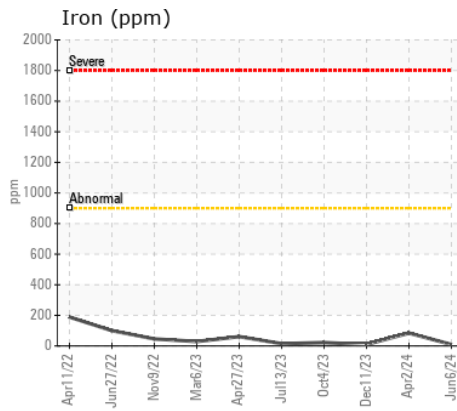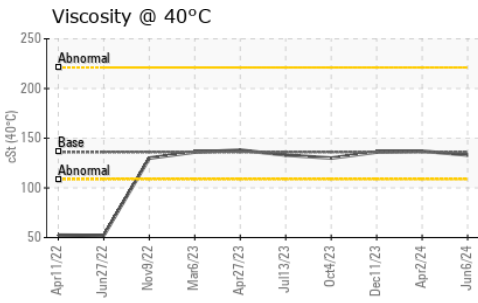

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP445500
Lab Number : 06212176
Unique Number : 11085040
Test Package : MOB 1

Received : 17 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 19 Jun 2024 - Wes Davis

SCHILBERG CONSTRUCTION COMPANY
 PO BOX 358
 GREENFIELD, IA
 US 50849
 Contact: SCOTT ARMSTRONG
 sarmstrong@schilberg.com
 T: (641)743-8237
 F: (641)743-2486

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)