



OIL ANALYSIS REPORT

|                 |        |
|-----------------|--------|
| WEAR            | NORMAL |
| CONTAMINATION   | NORMAL |
| FLUID CONDITION | NORMAL |

Area  
**[SPM702306]**  
 Machine Id  
**SENNEBOGEN 835 835.0.3213**  
 Component  
**Right Final Drive**  
 Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current     | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number  |     | Client Info |           | VCP446152   | ---      | ---      |
| Sample Date    |     | Client Info |           | 09 May 2024 | ---      | ---      |
| Machine Age    | hrs | Client Info |           | 2305        | ---      | ---      |
| Oil Age        | hrs | Client Info |           | 0           | ---      | ---      |
| Filter Age     | hrs | Client Info |           | 0           | ---      | ---      |
| Oil Changed    |     | Client Info |           | Changed     | ---      | ---      |
| Filter Changed |     | Client Info |           | Not Changed | ---      | ---      |
| Sample Status  |     |             |           | NORMAL      | ---      | ---      |

**WEAR**

All component wear rates are normal.

|              |        |             |      |      |     |     |
|--------------|--------|-------------|------|------|-----|-----|
| Iron         | ppm    | ASTM D5185m | >500 | 379  | --- | --- |
| Chromium     | ppm    | ASTM D5185m | >10  | 6    | --- | --- |
| Nickel       | ppm    | ASTM D5185m | >10  | <1   | --- | --- |
| Titanium     | ppm    | ASTM D5185m |      | <1   | --- | --- |
| Silver       | ppm    | ASTM D5185m |      | 0    | --- | --- |
| Aluminum     | ppm    | ASTM D5185m | >25  | 6    | --- | --- |
| Lead         | ppm    | ASTM D5185m | >25  | 0    | --- | --- |
| Copper       | ppm    | ASTM D5185m | >50  | <1   | --- | --- |
| Tin          | ppm    | ASTM D5185m | >10  | 0    | --- | --- |
| Vanadium     | ppm    | ASTM D5185m |      | <1   | --- | --- |
| White Metal  | scalar | *Visual     | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual     | NONE | NONE | --- | --- |

**CONTAMINATION**










There is no indication of any contamination in the oil.

|                  |        |             |       |       |     |     |
|------------------|--------|-------------|-------|-------|-----|-----|
| Silicon          | ppm    | ASTM D5185m | >75   | 38    | --- | --- |
| Potassium        | ppm    | ASTM D5185m | >20   | 6     | --- | --- |
| Water            |        | WC Method   | >0.2  | NEG   | --- | --- |
| Silt             | scalar | *Visual     | NONE  | MODER | --- | --- |
| Debris           | scalar | *Visual     | NONE  | NONE  | --- | --- |
| Sand/Dirt        | scalar | *Visual     | NONE  | NONE  | --- | --- |
| Appearance       | scalar | *Visual     | NORML | NORML | --- | --- |
| Odor             | scalar | *Visual     | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual     | >0.2  | NEG   | --- | --- |

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

|             |     |             |       |       |     |     |
|-------------|-----|-------------|-------|-------|-----|-----|
| Sodium      | ppm | ASTM D5185m | >170  | 3     | --- | --- |
| Boron       | ppm | ASTM D5185m | 400   | <1    | --- | --- |
| Barium      | ppm | ASTM D5185m | 200   | 2     | --- | --- |
| Molybdenum  | ppm | ASTM D5185m | 12    | 2     | --- | --- |
| Manganese   | ppm | ASTM D5185m |       | 4     | --- | --- |
| Magnesium   | ppm | ASTM D5185m | 12    | 5     | --- | --- |
| Calcium     | ppm | ASTM D5185m | 150   | 9     | --- | --- |
| Phosphorus  | ppm | ASTM D5185m | 1650  | 366   | --- | --- |
| Zinc        | ppm | ASTM D5185m | 125   | 16    | --- | --- |
| Sulfur      | ppm | ASTM D5185m | 22500 | 13232 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445   | 143   | 180   | --- | --- |

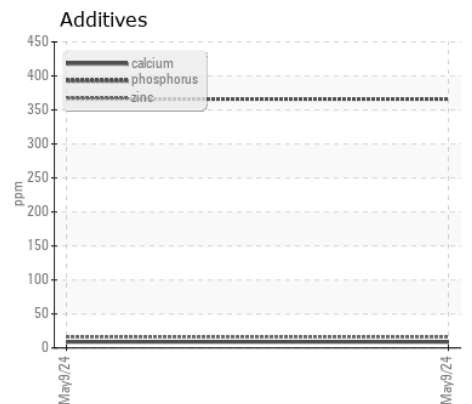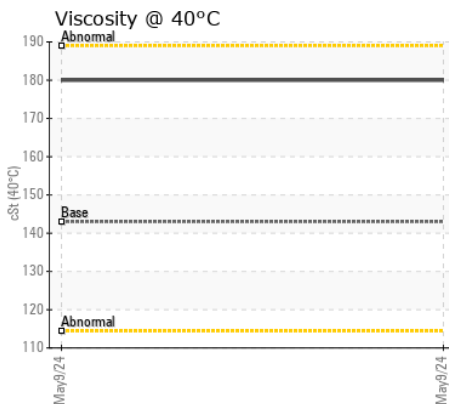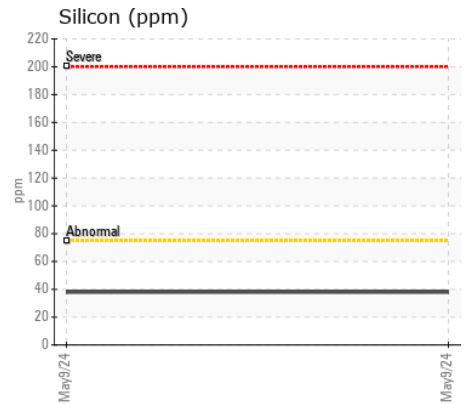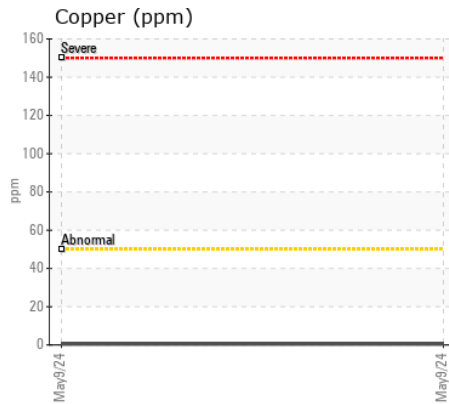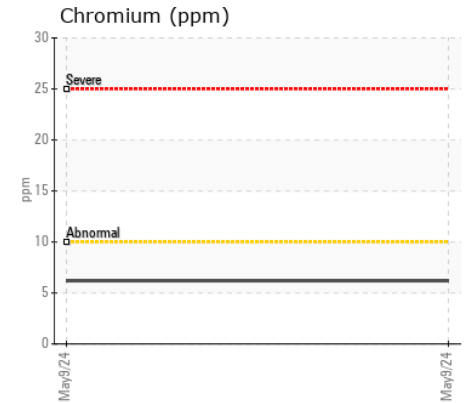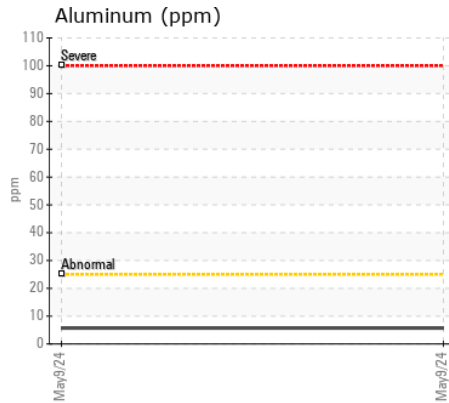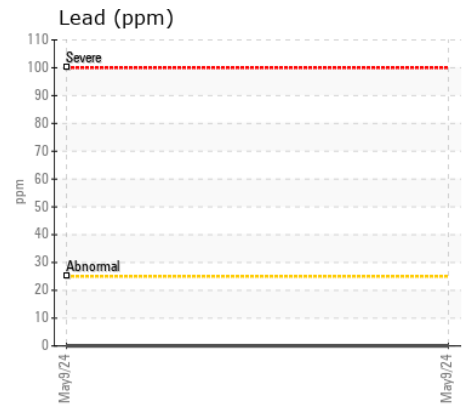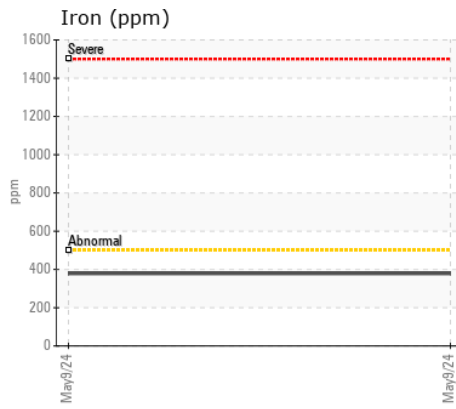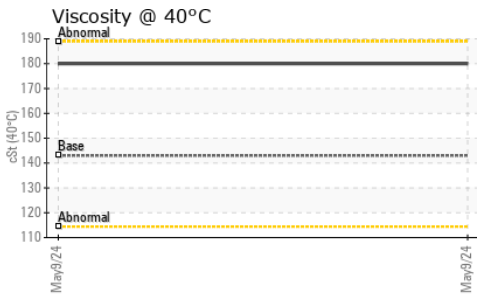

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP446152  
**Lab Number** : 06212186  
**Unique Number** : 11085050  
**Test Package** : MOB 1

**Received** : 17 Jun 2024  
**Tested** : 19 Jun 2024  
**Diagnosed** : 19 Jun 2024 - Wes Davis

**SIMS METAL MANAGEMENT**  
 2500 S. PAULINA  
 CHICAGO, IL  
 US 60608  
 Contact: RYAN WISE  
 ryan.wise@simsmm.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: