



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[SPM716807]
 Machine Id
VOLVO EC160E 314043
 Component
Swing Drive
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP446786	VCP415170	VCP422612
Sample Date		Client Info		24 May 2024	28 Aug 2023	26 Apr 2023
Machine Age	hrs	Client Info		6909	5634	5136
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1200	132	189	1062
Chromium	ppm	ASTM D5185m	>10	2	2	14
Nickel	ppm	ASTM D5185m	>10	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	<1	5
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>50	4	10	44
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	7	10	33
Potassium	ppm	ASTM D5185m	>20	2	2	3
Water		WC Method	>0.25	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	MODER
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.25	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	0	0	3
Boron	ppm	ASTM D5185m	400	36	254	0
Barium	ppm	ASTM D5185m	200	<1	3	5
Molybdenum	ppm	ASTM D5185m	12	2	<1	2
Manganese	ppm	ASTM D5185m		1	3	12
Magnesium	ppm	ASTM D5185m	12	26	3	5
Calcium	ppm	ASTM D5185m	150	202	31	14
Phosphorus	ppm	ASTM D5185m	1650	589	873	427
Zinc	ppm	ASTM D5185m	125	110	21	35
Sulfur	ppm	ASTM D5185m	22500	15798	19973	16591
Visc @ 40°C	cSt	ASTM D445	143	137	143	184

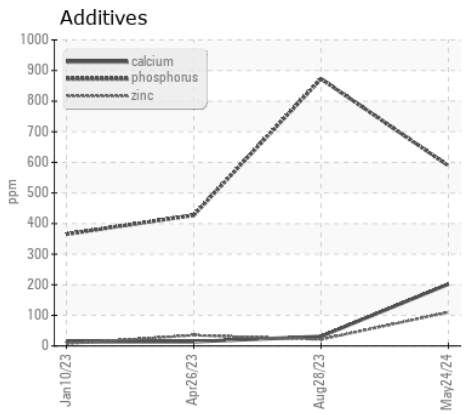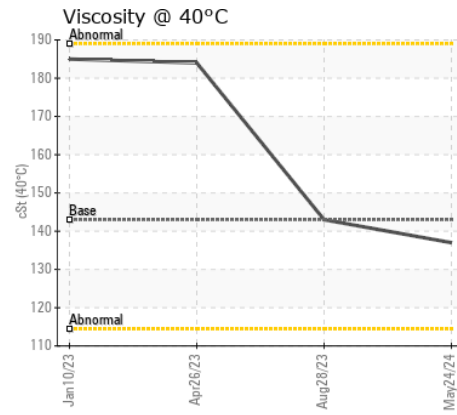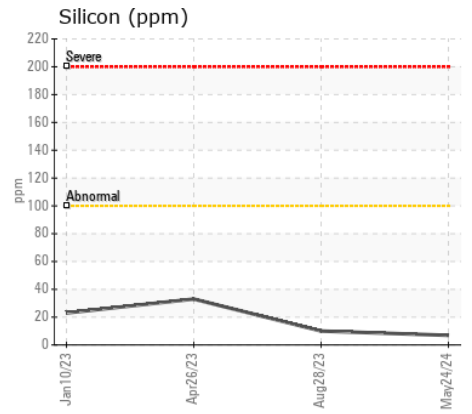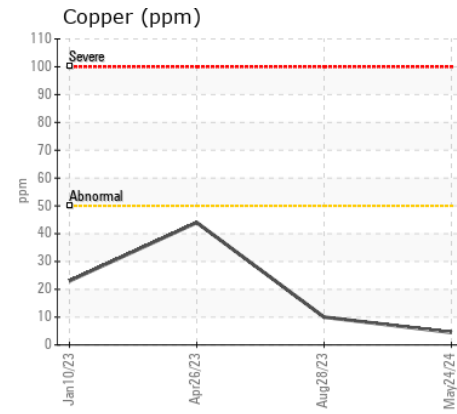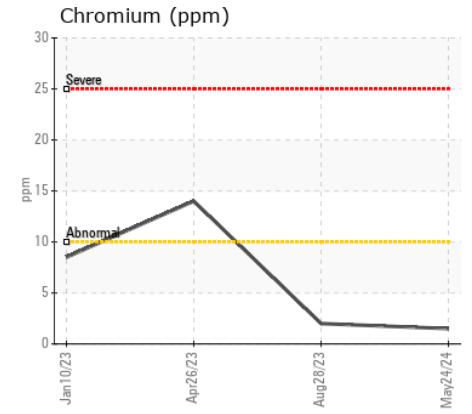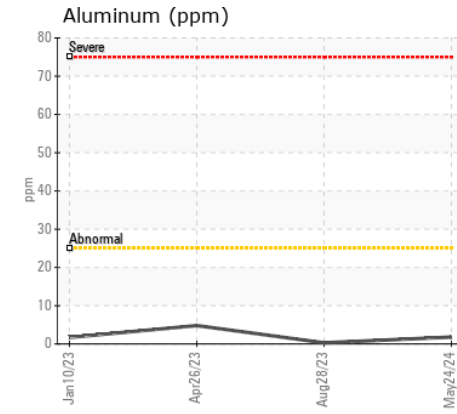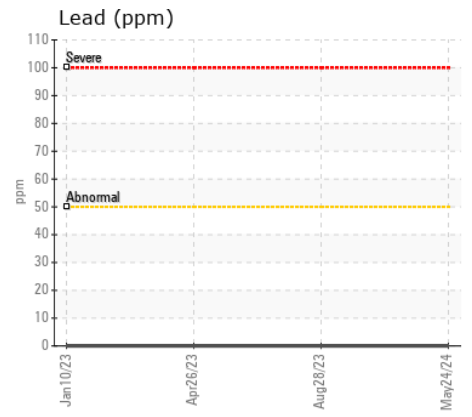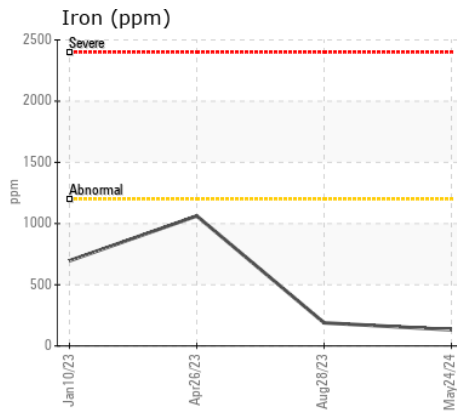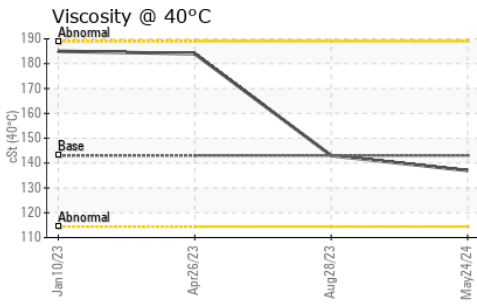

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : VCP446786
 Lab Number : 06212195
 Unique Number : 11085059
 Test Package : MOB 1

Received : 17 Jun 2024
 Tested : 19 Jun 2024
 Diagnosed : 19 Jun 2024 - Wes Davis

CALUMET CITY AUTO WRECKERS
 630 E STATE ST
 CALUMET CITY, IL
 US 60409
 Contact: GARY

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (815)600-9027

F: