



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[SPM702048 LKQ]
 Machine Id
VOLVO L110H 632728
 Component
Transmission
 Fluid
VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP446796	---	---
Sample Date		Client Info		30 Apr 2024	---	---
Machine Age	hrs	Client Info		482	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	31	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	2	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>50	6	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	LIGHT	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>50	7	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	187	78	---	---
Barium	ppm	ASTM D5185m	0.0	5	---	---
Molybdenum	ppm	ASTM D5185m	0.0	<1	---	---
Manganese	ppm	ASTM D5185m	0.0	4	---	---
Magnesium	ppm	ASTM D5185m	6.8	6	---	---
Calcium	ppm	ASTM D5185m	215	77	---	---
Phosphorus	ppm	ASTM D5185m	445	216	---	---
Zinc	ppm	ASTM D5185m	56	22	---	---
Sulfur	ppm	ASTM D5185m	1336	1856	---	---
Visc @ 40°C	cSt	ASTM D445	35.3	29.9	---	---

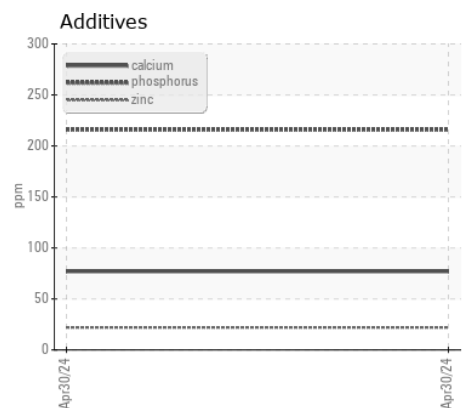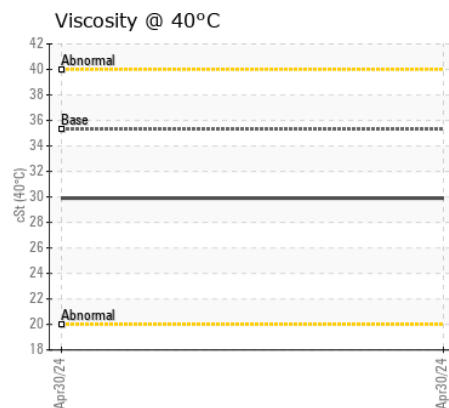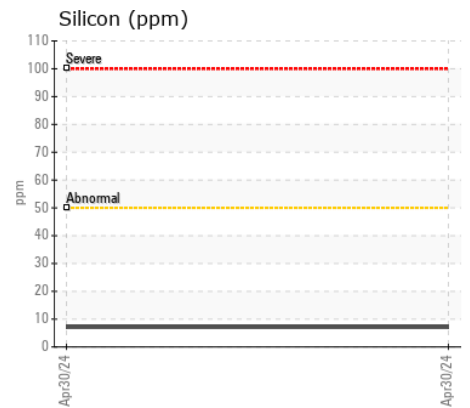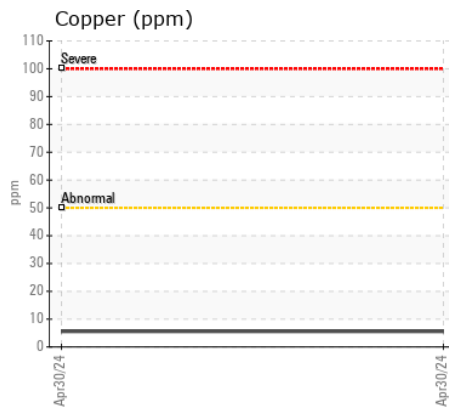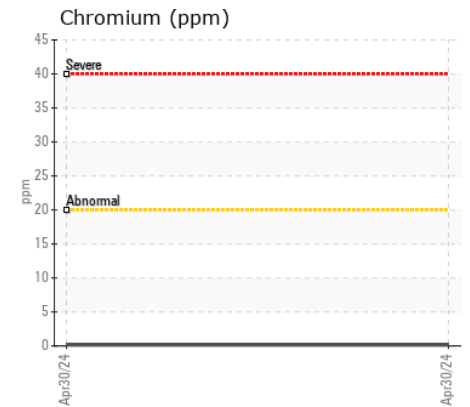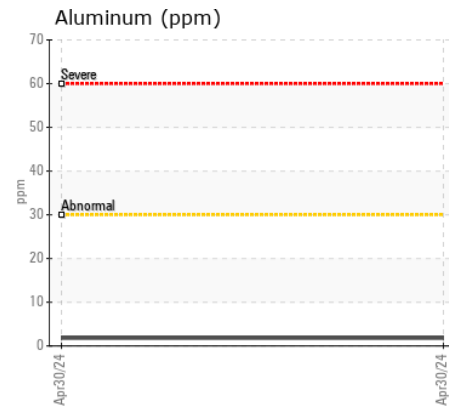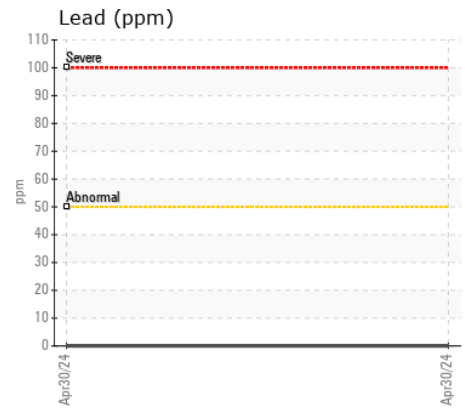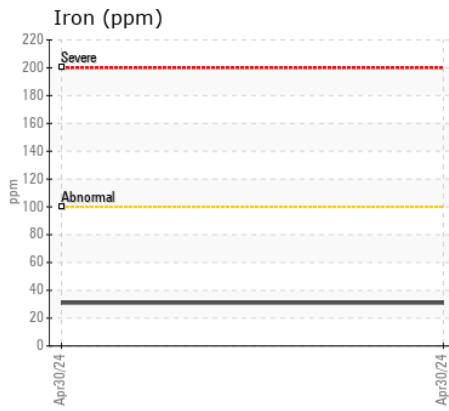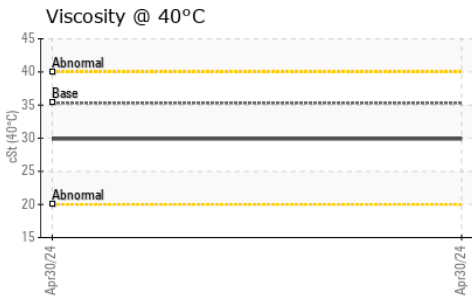

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : VCP446796
 Lab Number : 06212215
 Unique Number : 11085079
 Test Package : MOB 1

Received : 17 Jun 2024
 Tested : 19 Jun 2024
 Diagnosed : 19 Jun 2024 - Wes Davis

ALTA EQUIPMENT CO - ORLAND PARK
 5000 INDUSTRIAL HWY
 GARY, IN
 US 46406
 Contact: DAVE ENG
 DAVE.ENG@ALTG.COM
 T: (312)350-2560
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)