



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CR-143 E-2411
Component
Transmission (Auto)
Fluid
TES SYN 295 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0941909	WC0571081	---
Sample Date		Client Info		17 Jun 2024	01 Jan 2023	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185m	>160	6	7	---
Chromium	ppm	ASTM D5185m	>5	<1	0	---
Nickel	ppm	ASTM D5185m	>5	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>5	0	<1	---
Aluminum	ppm	ASTM D5185m	>50	2	<1	---
Lead	ppm	ASTM D5185m	>50	2	3	---
Copper	ppm	ASTM D5185m	>225	37	53	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>20	2	3	---
Potassium	ppm	ASTM D5185m	>20	3	<1	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---
Sodium	ppm	ASTM D5185m		1	2	---
Boron	ppm	ASTM D5185m	85	38	47	---
Barium	ppm	ASTM D5185m	0	<1	0	---
Molybdenum	ppm	ASTM D5185m	0	<1	<1	---
Manganese	ppm	ASTM D5185m	0	0	1	---
Magnesium	ppm	ASTM D5185m	1	3	2	---
Calcium	ppm	ASTM D5185m	100	288	276	---
Phosphorus	ppm	ASTM D5185m	200	200	185	---
Zinc	ppm	ASTM D5185m	0	13	10	---
Sulfur	ppm	ASTM D5185m	1500	735	537	---
Visc @ 40°C	cSt	ASTM D445	37.0	30.0	30.0	---

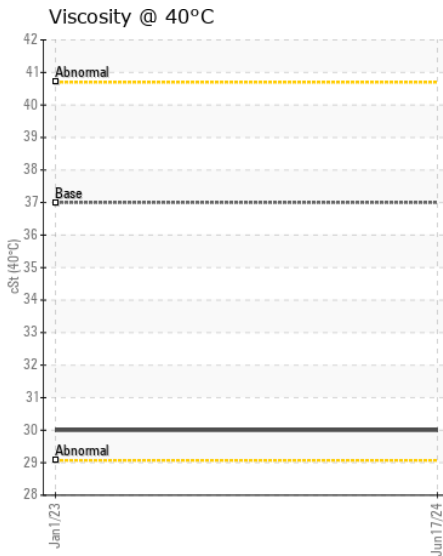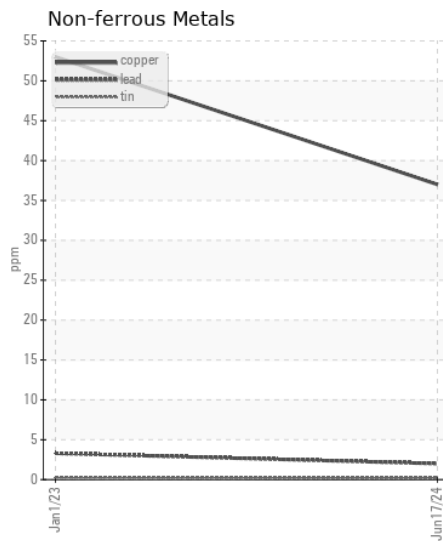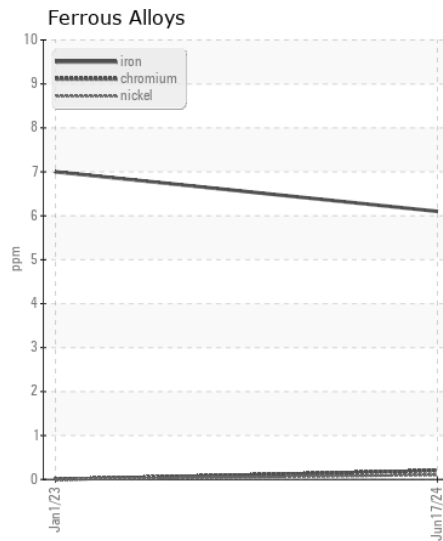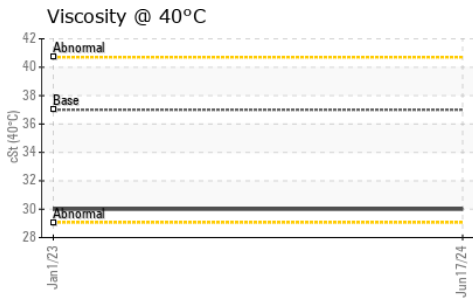

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0941909
Lab Number : 06212222
Unique Number : 11085086
Test Package : CONST

Received : 17 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 19 Jun 2024 - Wes Davis

SIDDONS-MARTIN EMERGENCY GROUP
 4401 REX RD
 FRIENDSWOOD, TX
 US 77546
 Contact: DOUGLAS DLOUHY
 DDLOUHY@SIDDONS-MARTIN.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: