



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**KEMP QUARRIES / HULBERT**

Machine Id  
**WL131**

Component  
**Hydraulic System**

Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0085970</b>	PCA0085917	PCA0109187
Sample Date		Client Info		<b>07 Jun 2024</b>	06 Apr 2024	27 Jan 2024
Machine Age	hrs	Client Info		<b>11670</b>	11256	10805
Oil Age	hrs	Client Info		<b>500</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changed</b>	Changed	Not Changed
Filter Changed		Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	<b>9</b>	15	12
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	4	2
Lead	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>75	<b>2</b>	3	2
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	<b>3</b>	6	3
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	2
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	2	0
Boron	ppm	ASTM D5185m	0	<b>1</b>	0	<1
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	5
Molybdenum	ppm	ASTM D5185m	0	<b>2</b>	3	2
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m	0	<b>21</b>	42	40
Calcium	ppm	ASTM D5185m		<b>135</b>	205	166
Phosphorus	ppm	ASTM D5185m		<b>386</b>	394	399
Zinc	ppm	ASTM D5185m		<b>474</b>	530	493
Sulfur	ppm	ASTM D5185m		<b>901</b>	1068	1037
Visc @ 40°C	cSt	ASTM D445	109	<b>65.6</b>	66.4	66.4

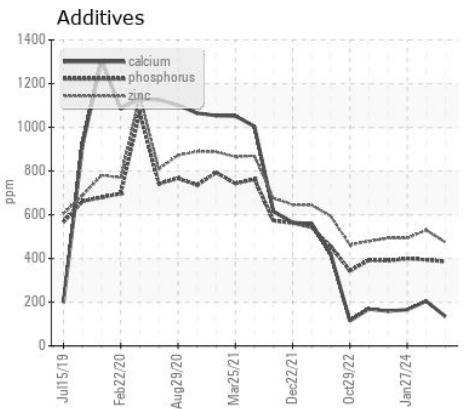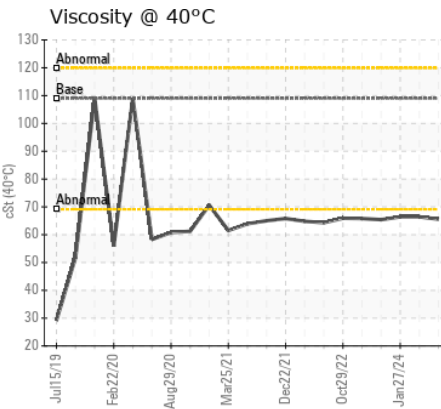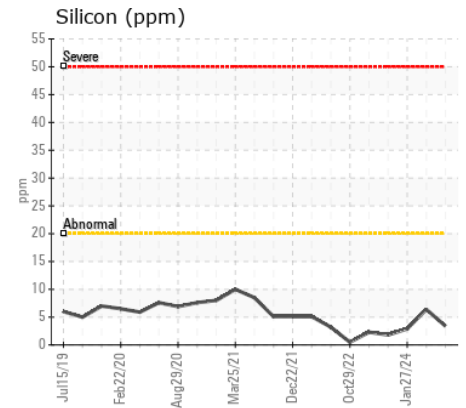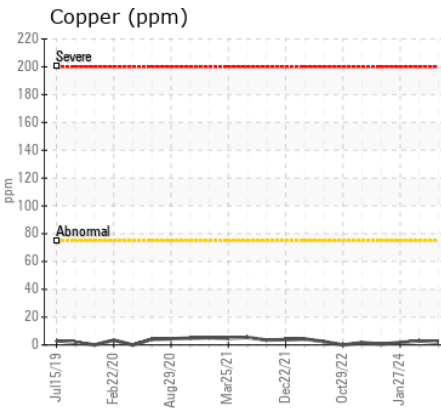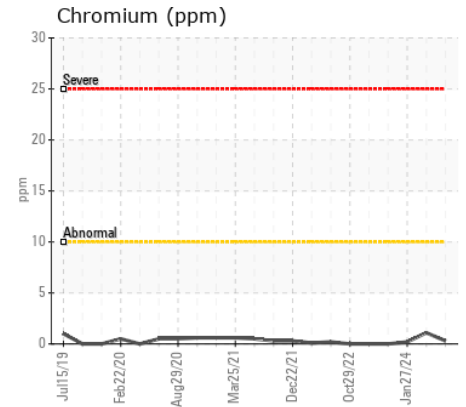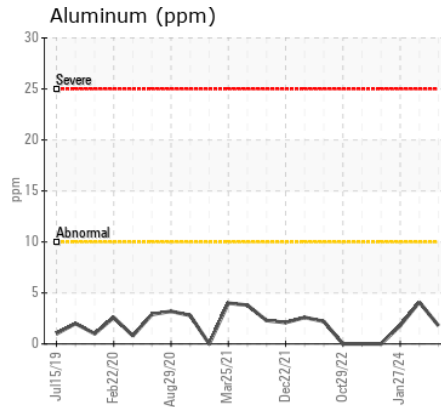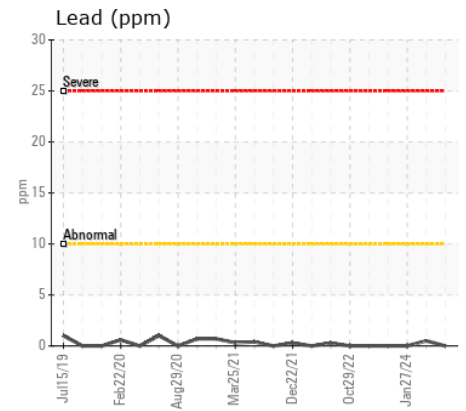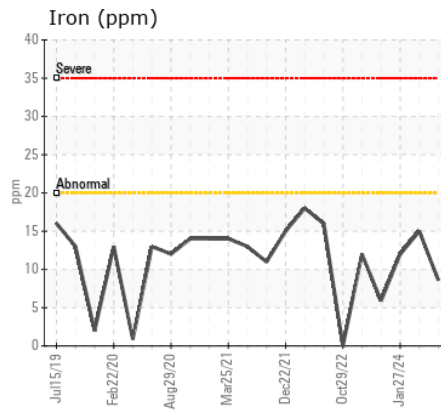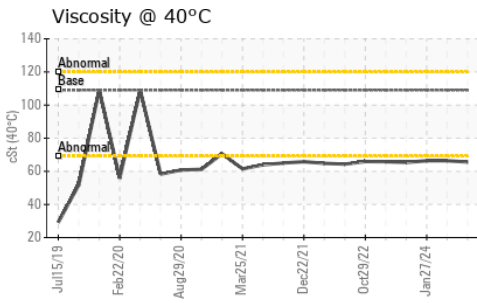

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0085970  
**Lab Number** : 06212231  
**Unique Number** : 11085095  
**Test Package** : MOB 1

**Received** : 17 Jun 2024  
**Tested** : 19 Jun 2024  
**Diagnosed** : 19 Jun 2024 - Don Baldrige

**Kemp Quarries - Kemp Stone - Hulbert**  
 17801 Hwy 80  
 Hulbert, OK  
 US 74441  
 Contact:  
 hulbert@kempstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: