



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**24F0704 BAPS-010**  
 Component  
**New (Unused) Oil**  
 Fluid  
**{not provided} (--- GAL)**

## RECOMMENDATION

This is a baseline read-out on the submitted sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		HPL0004706	---	---
Sample Date		Client Info		10 Jun 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

Iron	ppm	ASTM D5185m		0	---	---
Chromium	ppm	ASTM D5185m		0	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		<1	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		0	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---


## CONTAMINATION

Silicon	ppm	ASTM D5185m		5	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method		<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual		<b>NEG</b>	---	---


## FLUID CONDITION

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		<1	---	---
Calcium	ppm	ASTM D5185m		8	---	---
Phosphorus	ppm	ASTM D5185m		60	---	---
Zinc	ppm	ASTM D5185m		2	---	---
Sulfur	ppm	ASTM D5185m		9987	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.16	---	---
Visc @ 40°C	cSt	ASTM D445		37.44	---	---
Visc @ 100°C	cSt	ASTM D445		10.79	---	---
Viscosity Index (VI)	Scale	ASTM D2270		295	---	---


Viscosity @ 40°C

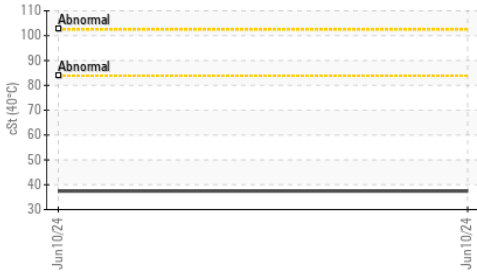


Ferrous Alloys

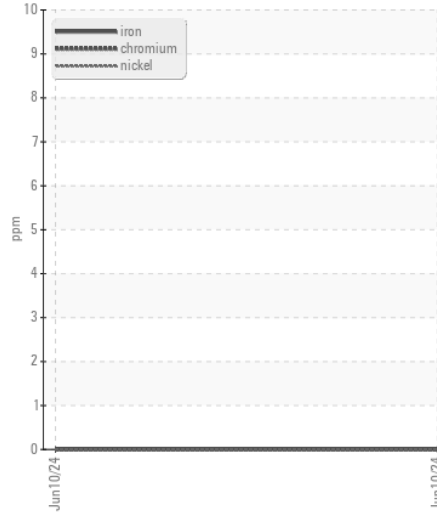


Non-ferrous Metals

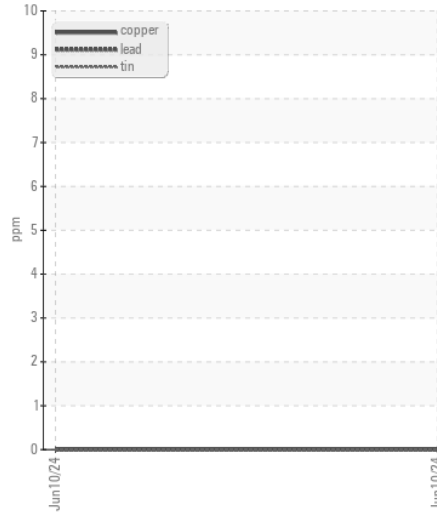


Acid Number

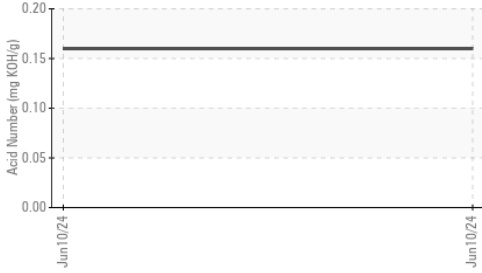


Viscosity @ 100°C

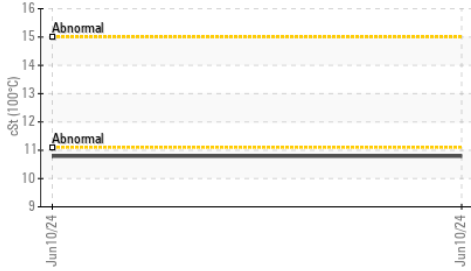

Viscosity @ 40°C

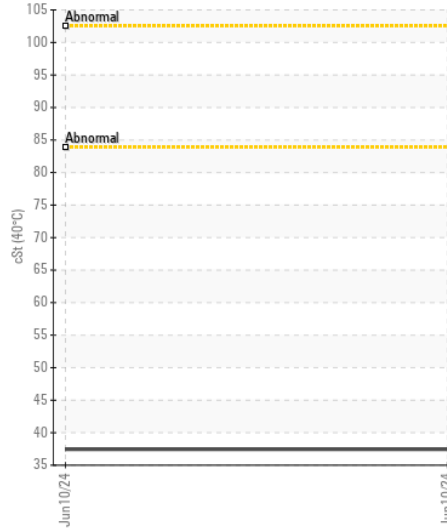

Acid Number

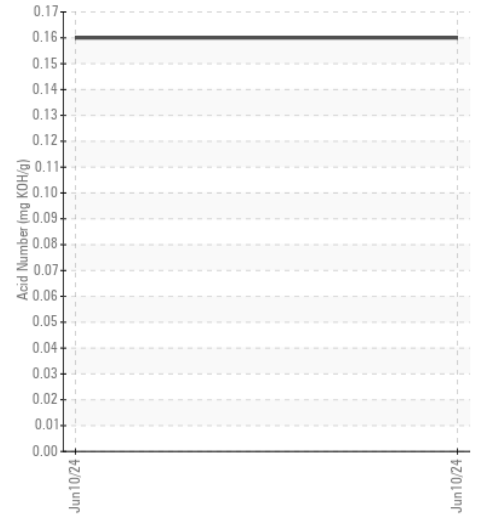

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HPL0004706 **Received** : 17 Jun 2024  
**Lab Number** : 06212261 **Tested** : 20 Jun 2024  
**Unique Number** : 11085125 **Diagnosed** : 20 Jun 2024 - Jonathan Hester  
**Test Package** : MOB 2 ( Additional Tests: FT-IR, KV100, PrtCount, VI )

**HIGH PERFORMANCE LUBRICANTS LLC**  
 500 S SPRUCE ST  
 MANTENO, IL  
 US 60950  
 Contact: DAVID WARD  
 sampledata@hplubricants.com  
 T: (815)468-3535  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)