



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id

20

Component

Hydraulic System

Fluid

AW HYDRAULIC OIL ISO 46 (20 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR0001559	---	---
Sample Date		Client Info		13 Jun 2024	---	---
Machine Age	hrs	Client Info		599	---	---
Oil Age	hrs	Client Info		599	---	---
Filter Age	hrs	Client Info		599	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	<1	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	0	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>75	7	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	1	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	2224	---	---
Particles >6µm		ASTM D7647	>1300	646	---	---
Particles >14µm		ASTM D7647	>160	52	---	---
Particles >21µm		ASTM D7647	>40	12	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/17/13	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	5	0	---	---
Barium	ppm	ASTM D5185m	5	0	---	---
Molybdenum	ppm	ASTM D5185m	5	0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	25	1	---	---
Calcium	ppm	ASTM D5185m	200	75	---	---
Phosphorus	ppm	ASTM D5185m	300	323	---	---
Zinc	ppm	ASTM D5185m	370	409	---	---
Sulfur	ppm	ASTM D5185m	2500	2298	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.32	---	---
Visc @ 40°C	cSt	ASTM D445	46	44.7	---	---
Visc @ 100°C	cSt	ASTM D445	6.7	7.2	---	---
Viscosity Index (VI)	Scale	ASTM D2270	97	122	---	---

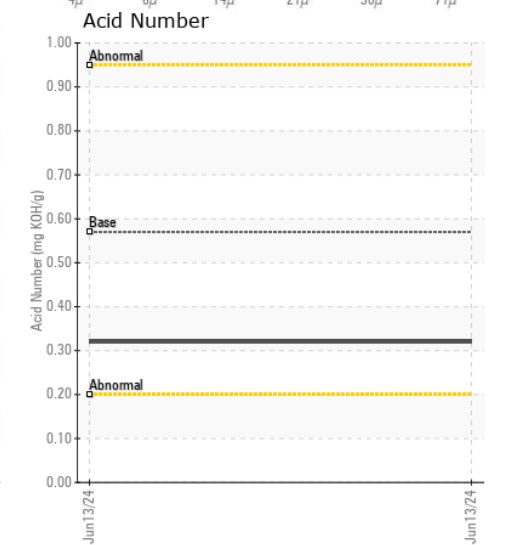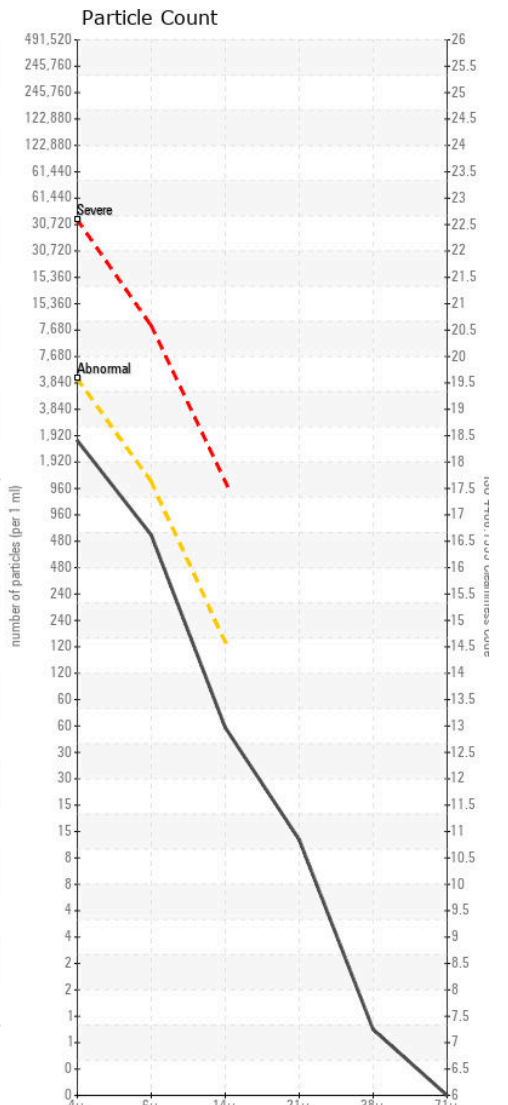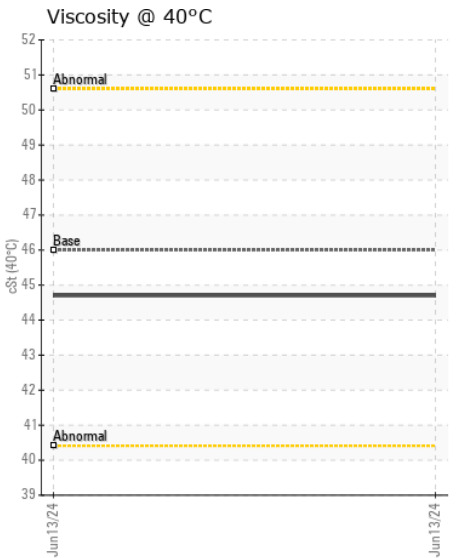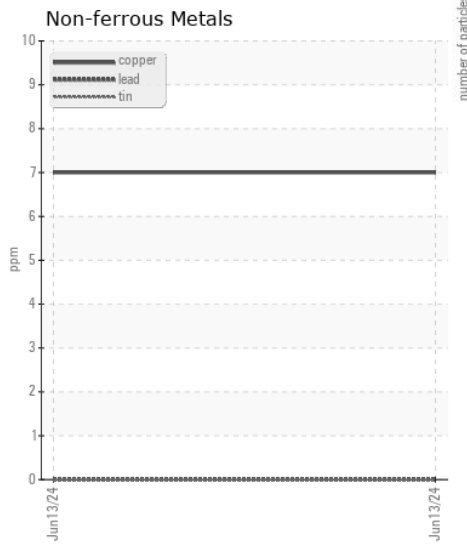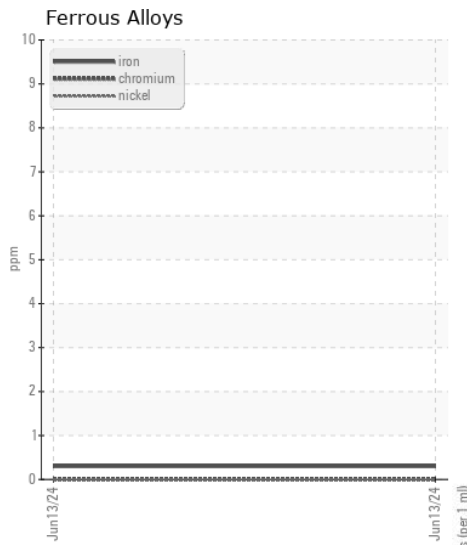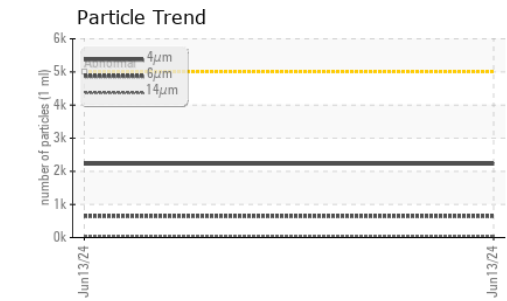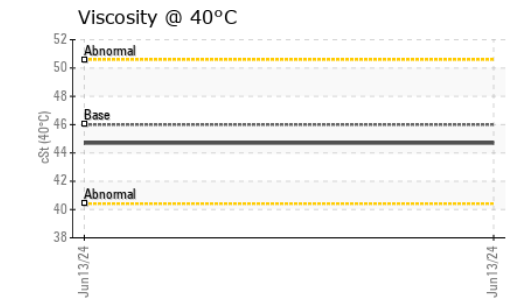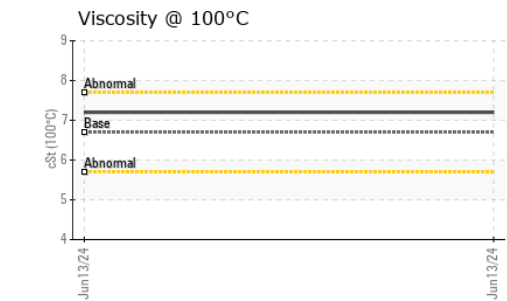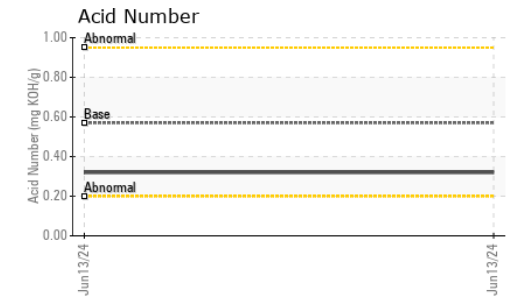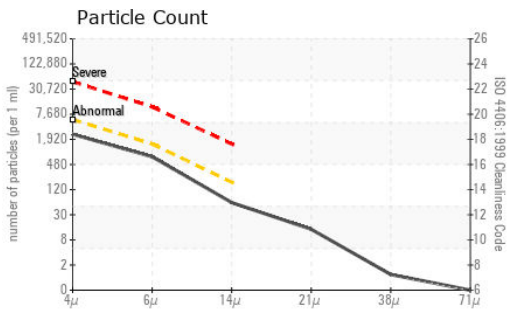

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : TR0001559

Lab Number : 06212322

Unique Number : 11085186

Test Package : MOB 2 (Additional Tests: KV100, VI)

Received : 17 Jun 2024

Tested : 19 Jun 2024

Diagnosed : 19 Jun 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

S S CONCRETE MATERIALS LLC

P.O. BOX 23283

BULLHEAD CITY, AZ

US 86439

Contact: SNS INVENTORY

snsinventory@yahoo.com

T:

F: (928)754-1991