



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area
DAVID K WILSON
Machine Id
[**DAVID K WILSON**] 006 534110-6
Component
Starboard Reduction Gear
Fluid
CHEVRON URSA SUPER PLUS 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | MW0018136 | MW0066210 | MW0037564 |
| Sample Date | | Client Info | | 31 May 2024 | 01 Feb 2024 | 07 Jan 2024 |
| Machine Age | hrs | Client Info | | 21461 | 68565 | 0 |
| Oil Age | hrs | Client Info | | 514 | 1522 | 0 |
| Filter Age | hrs | Client Info | | 0 | 1522 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Filter Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >150 | 2 | 2 | <1 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | 1 | <1 | <1 |
| Lead | ppm | ASTM D5185m | >100 | 0 | <1 | <1 |
| Copper | ppm | ASTM D5185m | >50 | <1 | <1 | 0 |
| Tin | ppm | ASTM D5185m | >10 | <1 | <1 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|-------|--------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >50 | 4 | 3 | 3 |
| Potassium | ppm | ASTM D5185m | >20 | 3 | 2 | 0 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185m | | 4 | 3 | 2 |
| Boron | ppm | ASTM D5185m | | 286 | 306 | 274 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 29 | 29 | 27 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | | 10 | 10 | 10 |
| Calcium | ppm | ASTM D5185m | | 2424 | 2249 | 2211 |
| Phosphorus | ppm | ASTM D5185m | 1000 | 730 | 694 | 644 |
| Zinc | ppm | ASTM D5185m | 1090 | 765 | 737 | 715 |
| Sulfur | ppm | ASTM D5185m | | 3403 | 2907 | 2746 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 1.09 | 1.18 | 1.07 |
| Visc @ 40°C | cSt | ASTM D445 | 143 | 132 | 131 | 133 |

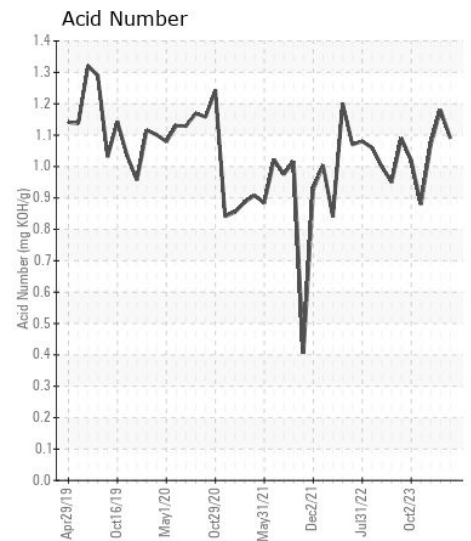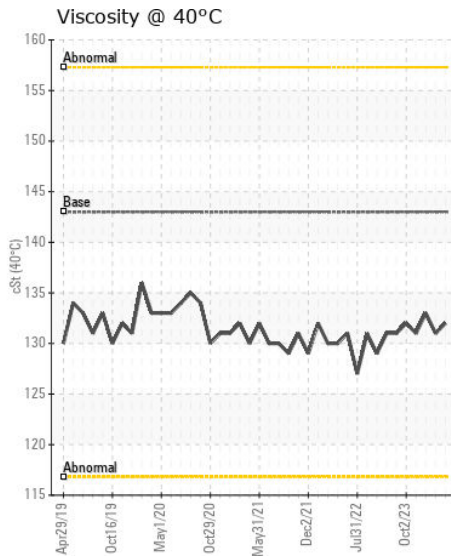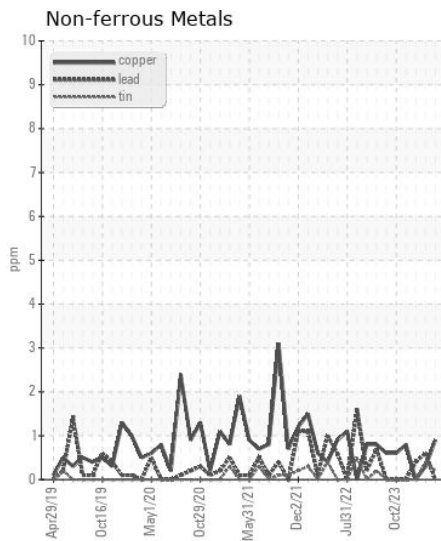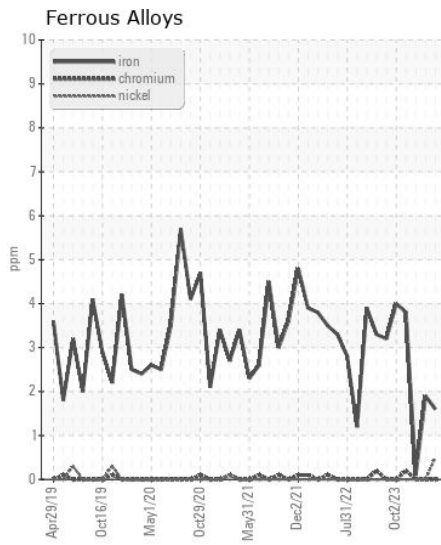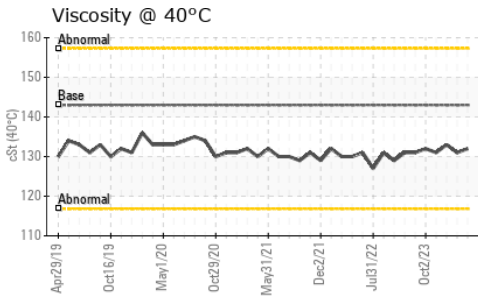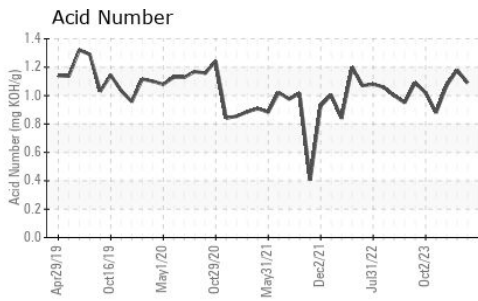

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW0018136

Lab Number : 06212538

Unique Number : 11085402

Test Package : MAR 2

Received : 17 Jun 2024

Tested : 19 Jun 2024

Diagnosed : 19 Jun 2024 - Wes Davis

INGRAM BARGE

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: JAMES ADAIR

james.adair@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)