



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
20
 Component
Transmission (Auto)
 Fluid
ATF (3 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR0001560	---	---
Sample Date		Client Info		13 Jun 2024	---	---
Machine Age	hrs	Client Info		599	---	---
Oil Age	hrs	Client Info		599	---	---
Filter Age	hrs	Client Info		599	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	23	---	---
Chromium	ppm	ASTM D5185m	>5	0	---	---
Nickel	ppm	ASTM D5185m	>5	1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>5	0	---	---
Aluminum	ppm	ASTM D5185m	>50	8	---	---
Lead	ppm	ASTM D5185m	>50	3	---	---
Copper	ppm	ASTM D5185m	>225	6	---	---
Tin	ppm	ASTM D5185m	>10	2	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	4	---	---
Potassium	ppm	ASTM D5185m	>20	7	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m		100	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		2	---	---
Calcium	ppm	ASTM D5185m		65	---	---
Phosphorus	ppm	ASTM D5185m		286	---	---
Zinc	ppm	ASTM D5185m		16	---	---
Sulfur	ppm	ASTM D5185m		1403	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.22	---	---
Visc @ 40°C	cSt	ASTM D445	35.0	35.1	---	---
Visc @ 100°C	cSt	ASTM D445	8.0	7.3	---	---
Viscosity Index (VI)	Scale	ASTM D2270	212	179	---	---

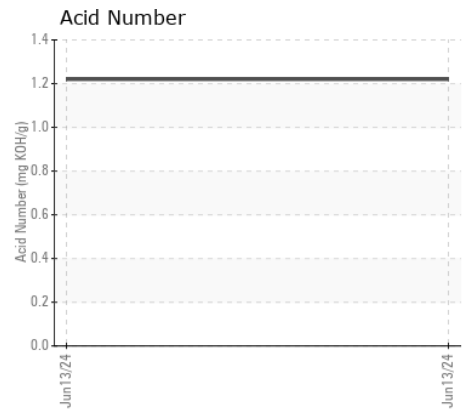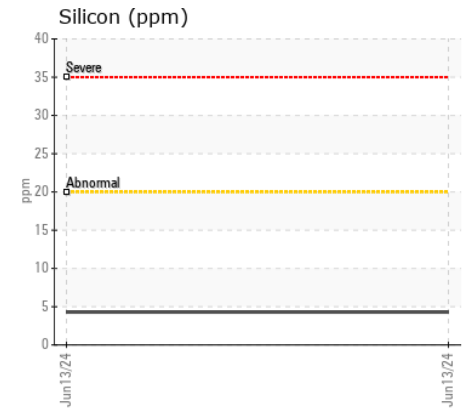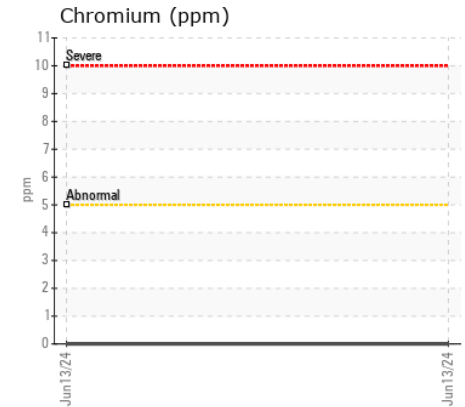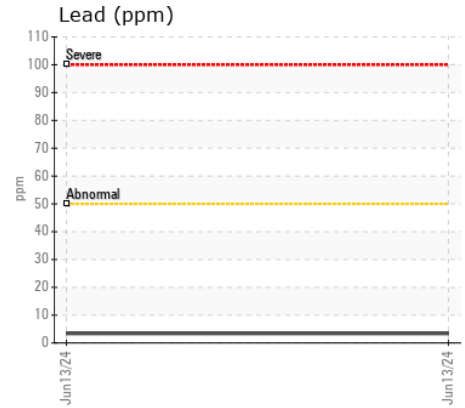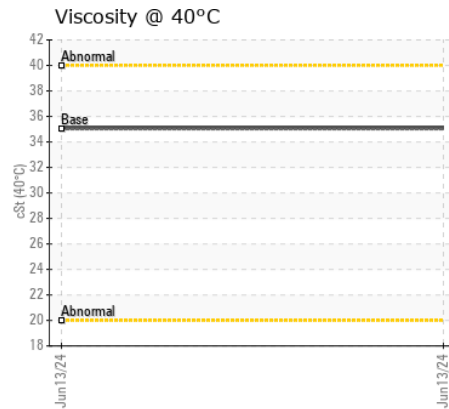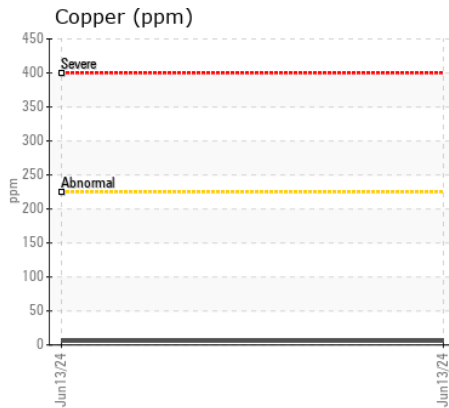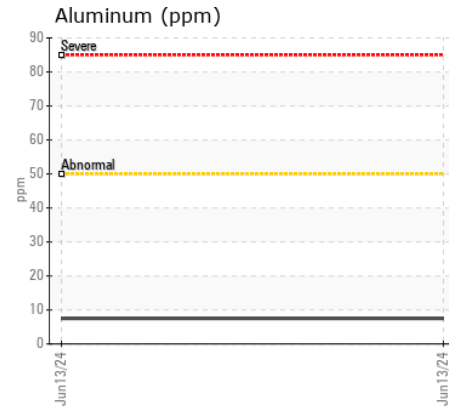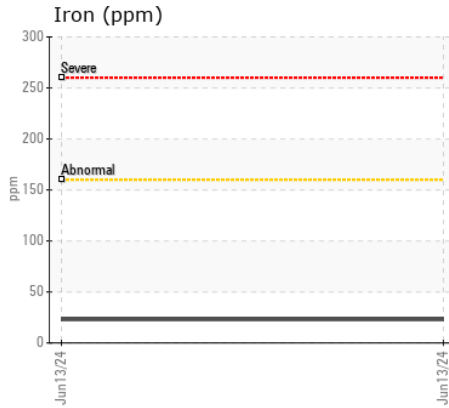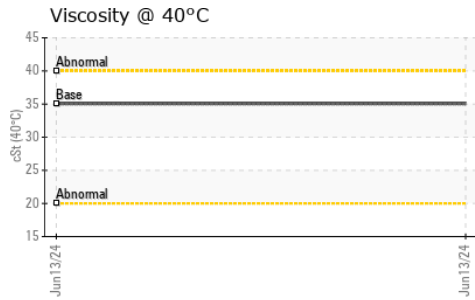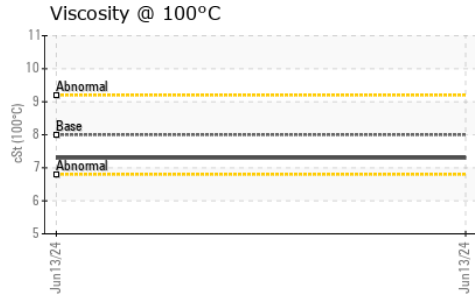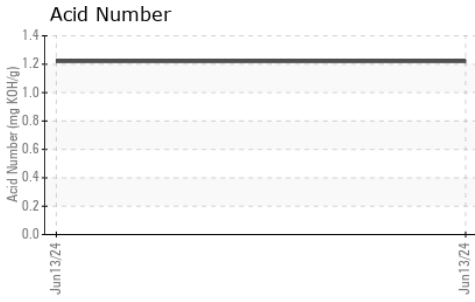

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR0001560
Lab Number : 06212542
Unique Number : 11085406
Test Package : MOB 2 (Additional Tests: KV100, VI)

Received : 17 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 19 Jun 2024 - Sean Felton

S S CONCRETE MATERIALS LLC
 P.O. BOX 23283
 BULLHEAD CITY, AZ
 US 86439
 Contact: SNS INVENTORY
 snsinventory@yahoo.com

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (928)754-1991