



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**SUSAN JOHNSON**  
Machine Id  
[SUSAN JOHNSON] 001 569359-1  
Component  
Port Main Engine  
Fluid  
CHEVRON DELO 710 LE (250 GAL)

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0064766</b>	MW0064775	MW0058728
Sample Date		Client Info		<b>01 Jun 2024</b>	01 May 2024	01 Dec 2023
Machine Age	hrs	Client Info		<b>45120</b>	44399	43870
Oil Age	hrs	Client Info		<b>45120</b>	44399	43870
Filter Age	hrs	Client Info		<b>138</b>	151	287
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>15</b>	12	12
Chromium	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	1	2
Lead	ppm	ASTM D5185m	>18	<b>4</b>	3	3
Copper	ppm	ASTM D5185m	>80	<b>18</b>	15	16
Tin	ppm	ASTM D5185m	>14	<b>4</b>	4	3
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	<b>4</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	0	2
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.8</b>	0.9	1
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.9</b>	8.8	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>16.0</b>	16.4	16.5
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>3</b>	1	<1
Boron	ppm	ASTM D5185m		<b>36</b>	39	35
Barium	ppm	ASTM D5185m		<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m		<b>46</b>	44	44
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>16</b>	15	15
Calcium	ppm	ASTM D5185m		<b>3635</b>	3244	3278
Phosphorus	ppm	ASTM D5185m		<b>10</b>	8	8
Zinc	ppm	ASTM D5185m	10	<b>3</b>	1	0
Sulfur	ppm	ASTM D5185m		<b>2687</b>	2452	2108
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>8.0</b>	8.1	8.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.2	<b>6.87</b>	9.38	9.61
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.5</b>	14.4	14.5


**FT-IR (Direct Trend)**

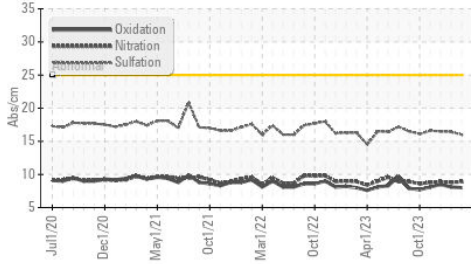


**Base Number**

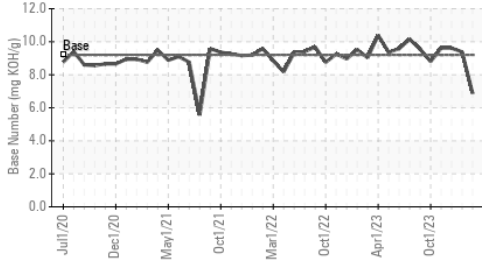


**Viscosity @ 100°C**

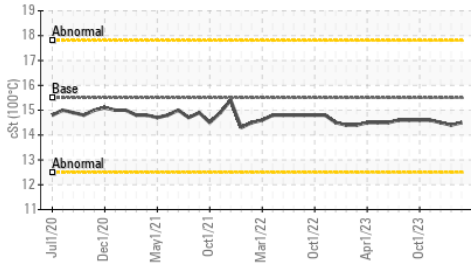


**Acid Number**

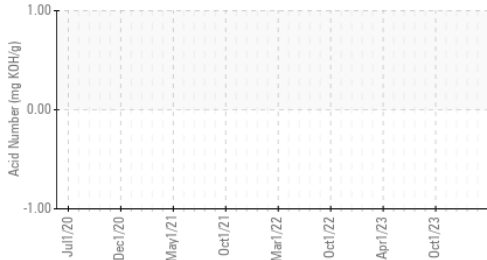


**Ferrous Alloys**

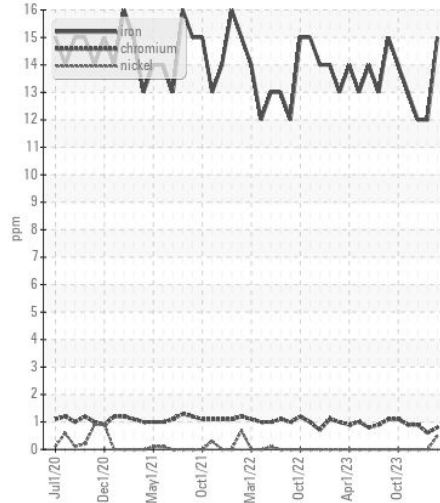


**Non-ferrous Metals**

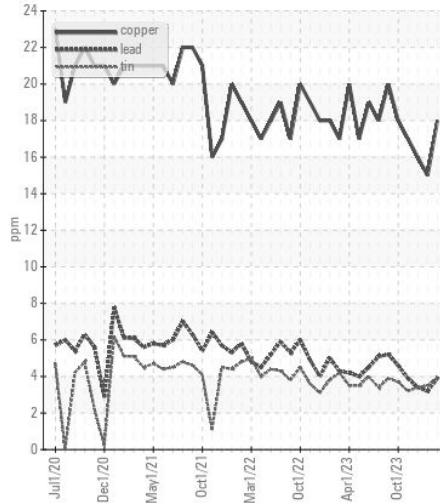

**Viscosity @ 100°C**

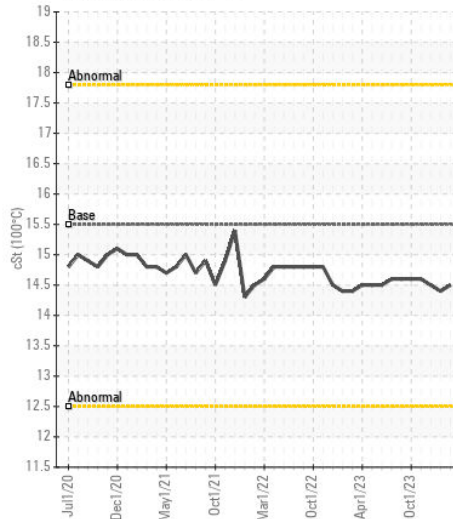

**Acid Number**

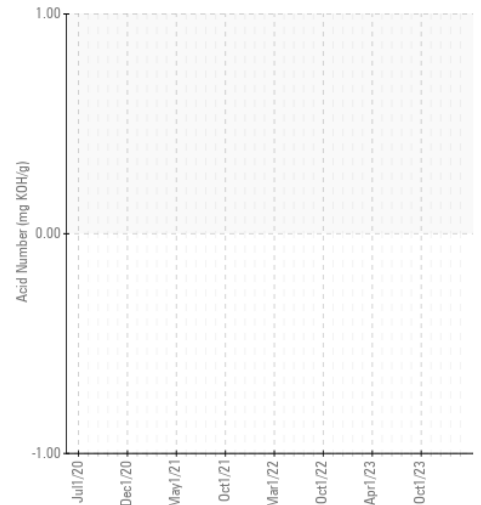

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0064766 **Received** : 17 Jun 2024  
**Lab Number** : 06212572 **Tested** : 19 Jun 2024  
**Unique Number** : 11085436 **Diagnosed** : 19 Jun 2024 - Angela Borella  
**Test Package** : MAR 2 ( Additional Tests: TAN Man )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003

Contact: GLENN ELLIS  
 glen.ellis@ingrambarga.com

T: (270)415-4467  
 F: (615)695-3697