



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**DANIEL P MECKLENBORG**

Machine Id

**[DANIEL P MECKLENBORG] 003 608409-3**

Component

**Starboard Main Engine**

Fluid

**CHEVRON DELO 710 LS (350 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW06212579</b>	MW0065817	MW01648178
Sample Date		Client Info		<b>01 Jun 2024</b>	01 May 2024	01 Apr 2024
Machine Age	hrs	Client Info		<b>64423</b>	63679	63088
Oil Age	hrs	Client Info		<b>0</b>	63679	63088
Filter Age	hrs	Client Info		<b>0</b>	63679	0
Oil Changed		Client Info		<b>N/A</b>	Not Changd	N/A
Filter Changed		Client Info		<b>N/A</b>	None	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>11</b>	12	7
Chromium	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	1	2
Lead	ppm	ASTM D5185m	>18	<b>2</b>	2	2
Copper	ppm	ASTM D5185m	>80	<b>13</b>	12	12
Tin	ppm	ASTM D5185m	>14	<b>3</b>	2	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	<b>4</b>	3	4
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	<1	2
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.8</b>	0.7	0.8
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.2</b>	7.9	7.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>16.2</b>	16.4	15.9
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>3</b>	1	<1
Boron	ppm	ASTM D5185m		<b>39</b>	44	46
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>43</b>	43	47
Manganese	ppm	ASTM D5185m		<b>2</b>	1	<1
Magnesium	ppm	ASTM D5185m		<b>15</b>	13	13
Calcium	ppm	ASTM D5185m		<b>3441</b>	3463	3660
Phosphorus	ppm	ASTM D5185m		<b>8</b>	0	10
Zinc	ppm	ASTM D5185m		<b>2</b>	13	3
Sulfur	ppm	ASTM D5185m		<b>2728</b>	2763	2811
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>8.5</b>	8.3	8.0
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>8.89</b>	8.39	8.78
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.3</b>	14.3	14.2


**FT-IR (Direct Trend)**

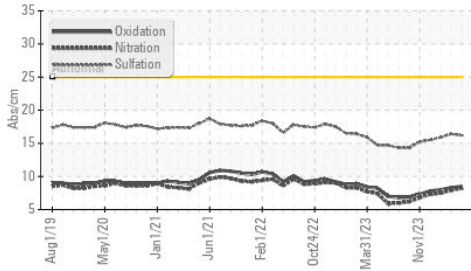


**Base Number**

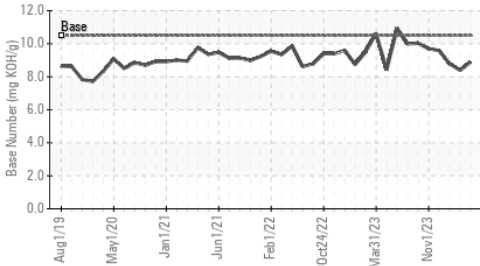


**Viscosity @ 100°C**

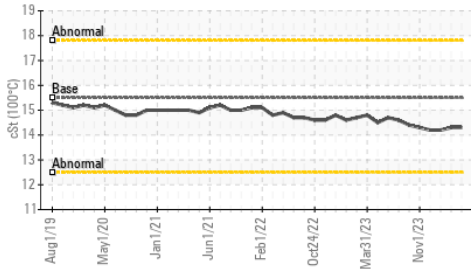


**Ferrous Alloys**

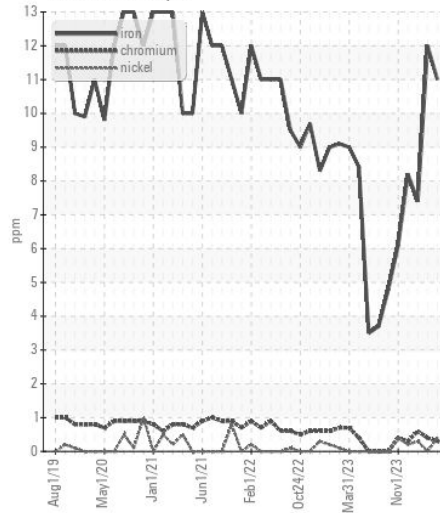


**Non-ferrous Metals**

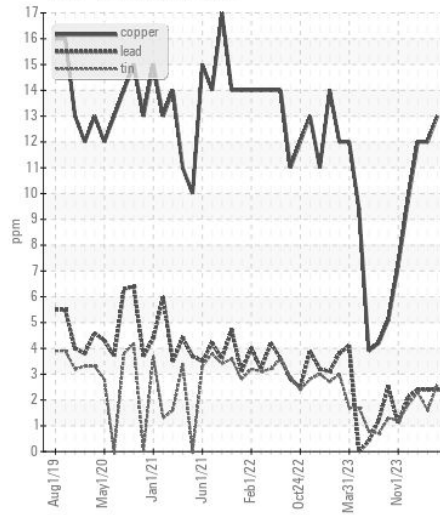

**Viscosity @ 100°C**

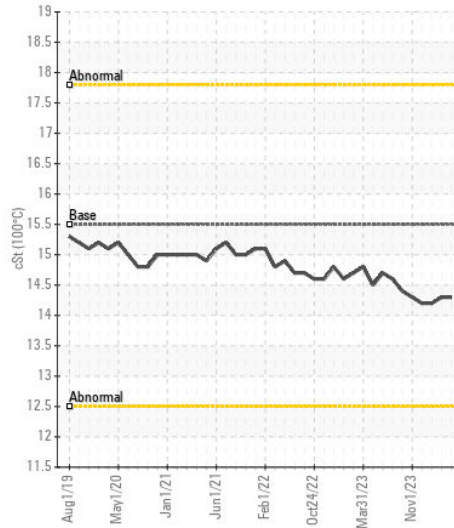

**Base Number**

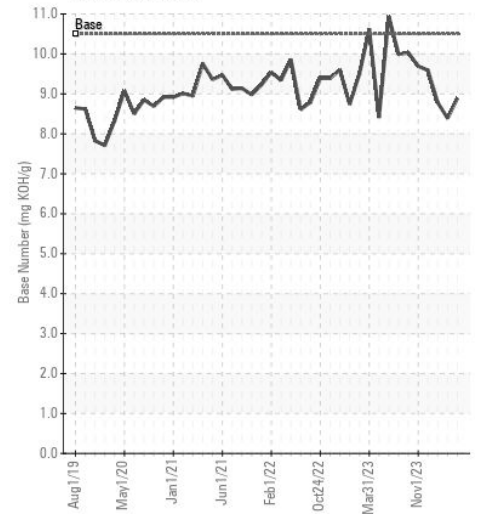

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW06212579

**Lab Number** : 06212579

**Unique Number** : 11085443

**Test Package** : MAR 2

**Received** : 17 Jun 2024

**Tested** : 19 Jun 2024

**Diagnosed** : 19 Jun 2024 - Wes Davis

**INGRAM BARGE**

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: ANTHONY VAN CURA

anthony.vancura@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)