



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[G08921]
 Machine Id
VOLVO L60E 60214
 Component
Rear Axle
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP449851	VC524849	VC158210
Sample Date		Client Info		12 Jun 2024	26 Jun 2007	12 Aug 2005
Machine Age	hrs	Client Info		5013	2988	2000
Oil Age	hrs	Client Info		0	1000	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	11	34	53
Chromium	ppm	ASTM D5185m	>20	0	1	2
Nickel	ppm	ASTM D5185m	>10	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	1	<1	<1
Lead	ppm	ASTM D5185m	>50	2	3	2
Copper	ppm	ASTM D5185m	>120	2	4	5
Tin	ppm	ASTM D5185m	>20	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	14	14	12
Potassium	ppm	ASTM D5185m	>20	3	0	3
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		10	8	4
Boron	ppm	ASTM D5185m		107	108	94
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		4	1	<1
Manganese	ppm	ASTM D5185m		<1	1	3
Magnesium	ppm	ASTM D5185m		41	11	11
Calcium	ppm	ASTM D5185m		3371	3547	2935
Phosphorus	ppm	ASTM D5185m		1162	1227	1156
Zinc	ppm	ASTM D5185m		1367	1528	1272
Sulfur	ppm	ASTM D5185m		8957	7538	6241

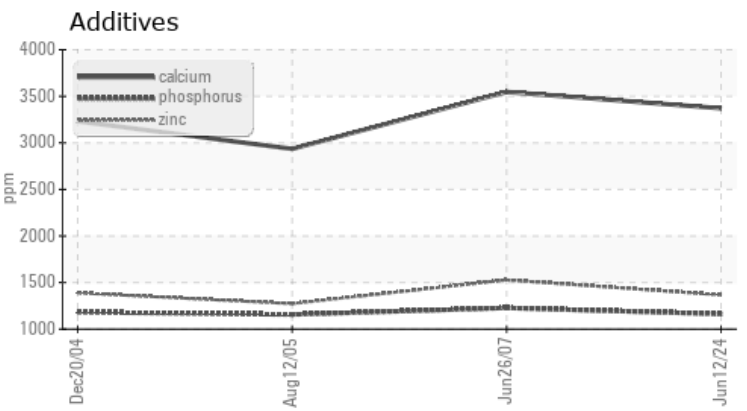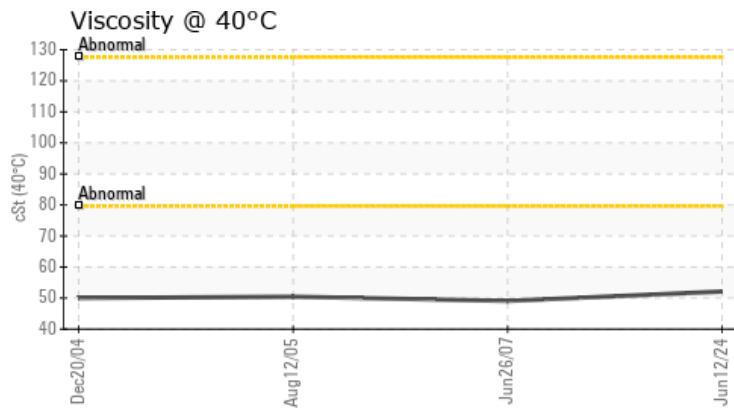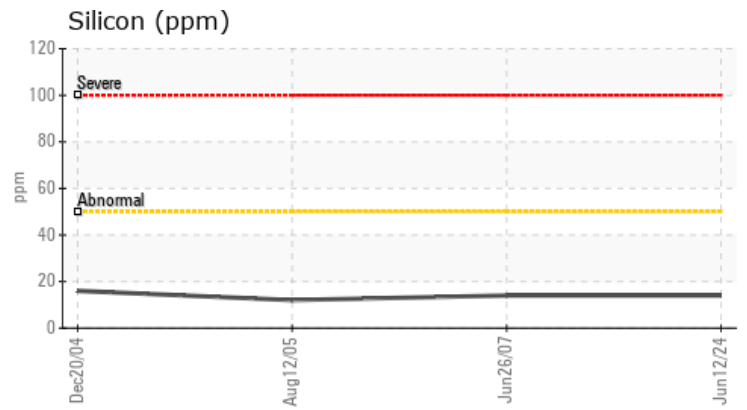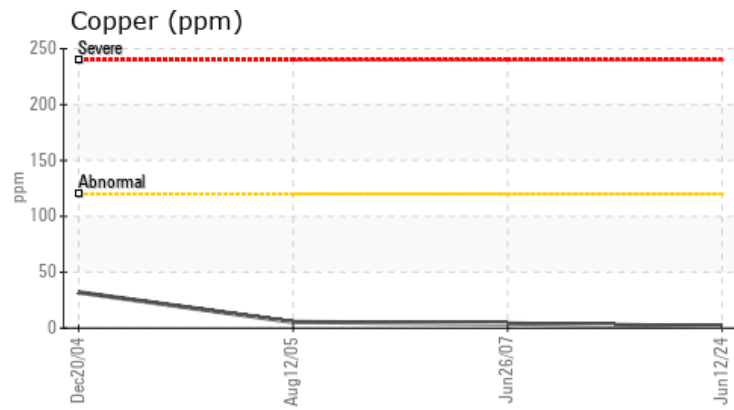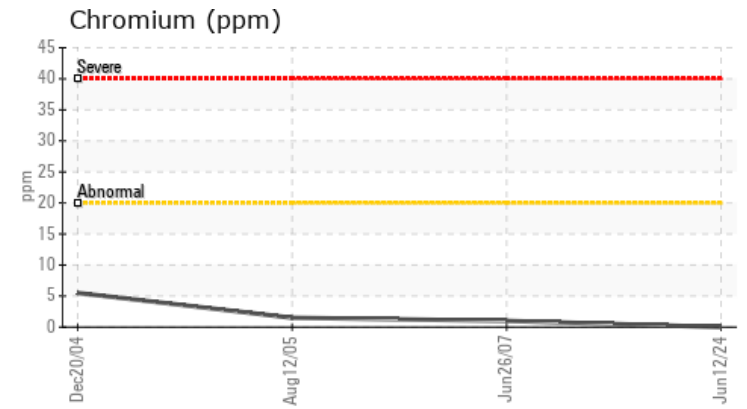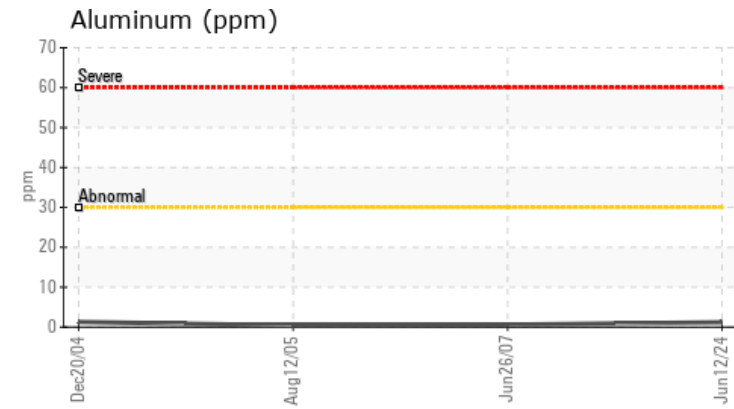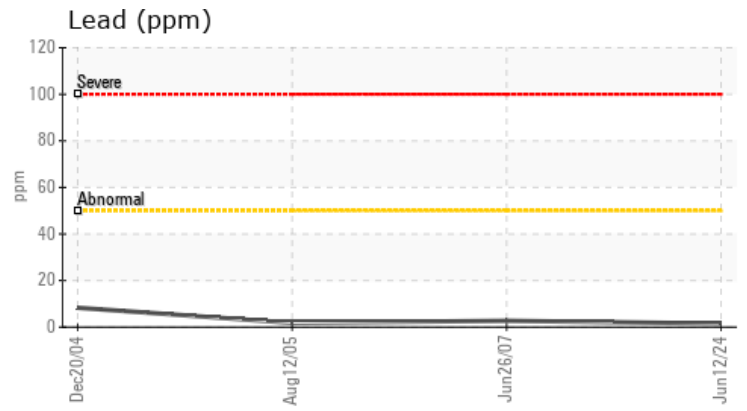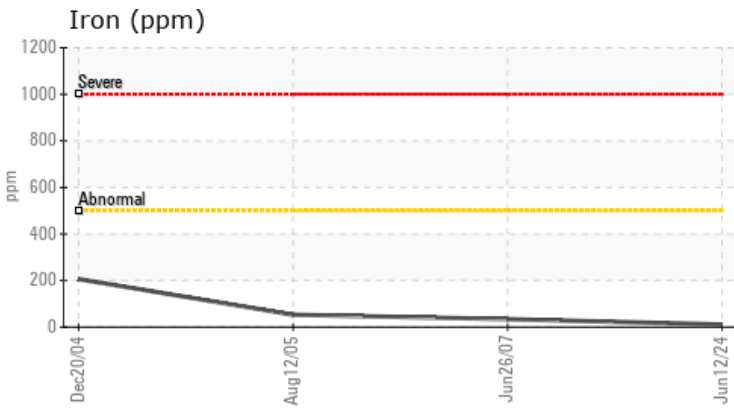

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP449851
Lab Number : 06212609
Unique Number : 11085473
Test Package : MOB 1

OLD BRIDGE CONSTRUCTION CO.
 6000 SAGEMORE DR. SUITE 6301
 MARLTON, NJ
 US 08053
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (856)985-1200

F: