



WEAR	ABNORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id  
**NOT GIVEN ASC0010471 (S/N NO INFO GIVEN)**

Component  
**Unknown Component**  
 Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

We advise that you check all areas where dirt can enter the system. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

### WEAR

Gear wear is indicated.








### CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. There is a moderate amount of visible silt present in the sample.

### FLUID CONDITION

The condition of the sample is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0010471	---	---
Sample Date		Client Info		17 Jun 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---
Iron	ppm	ASTM D5185m		▲ 736	---	---
Chromium	ppm	ASTM D5185m		7	---	---
Nickel	ppm	ASTM D5185m		1	---	---
Titanium	ppm	ASTM D5185m		7	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		● 110	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		2	---	---
Tin	ppm	ASTM D5185m		<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m		▲ 288	---	---
Potassium	ppm	ASTM D5185m	>20	13	---	---
Water		WC Method		NEG	---	---
Silt	scalar	*Visual	NONE	▲ MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---
Sodium	ppm	ASTM D5185m		16	---	---
Boron	ppm	ASTM D5185m		200	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		6	---	---
Magnesium	ppm	ASTM D5185m		19	---	---
Calcium	ppm	ASTM D5185m		71	---	---
Phosphorus	ppm	ASTM D5185m		1054	---	---
Zinc	ppm	ASTM D5185m		24	---	---
Sulfur	ppm	ASTM D5185m		29927	---	---
Visc @ 40°C	cSt	ASTM D445		269	---	---

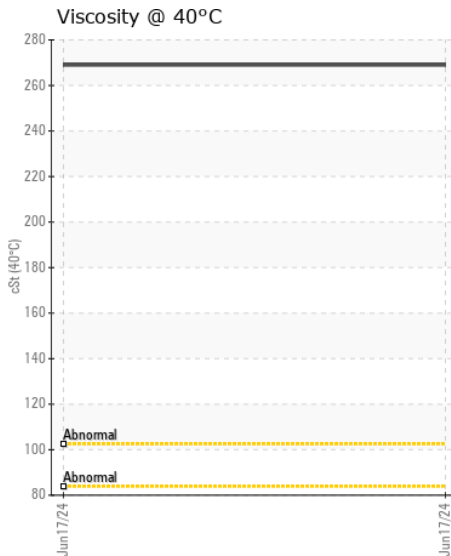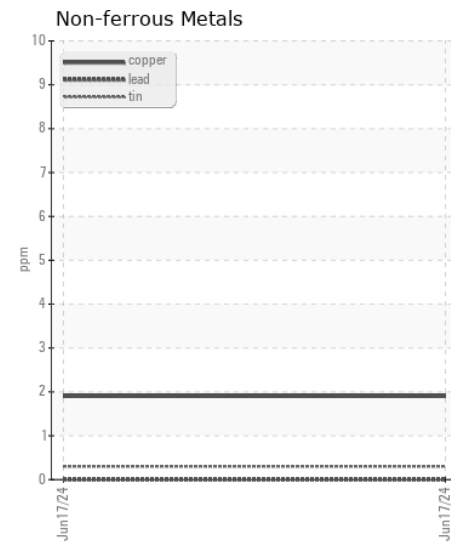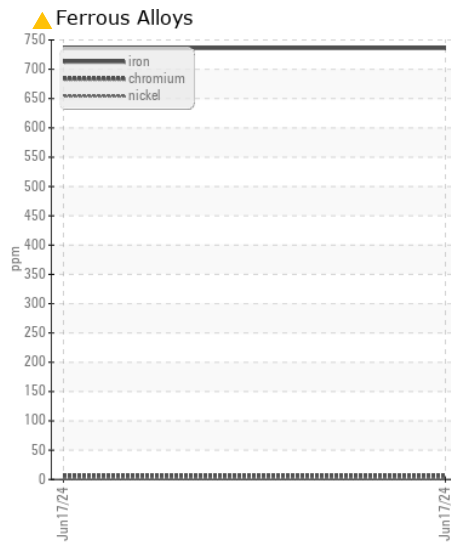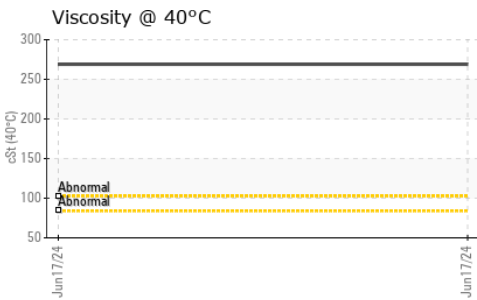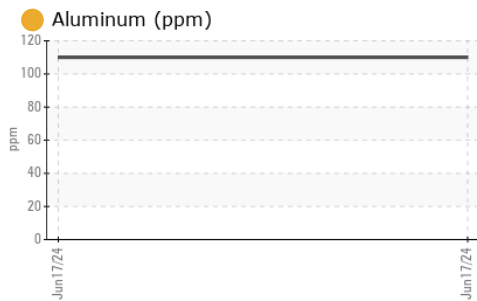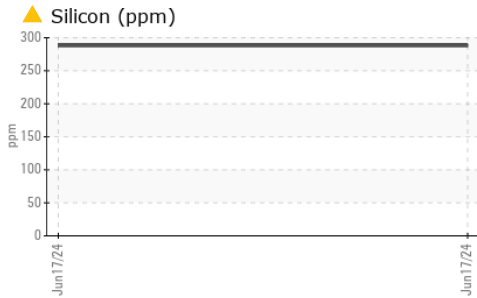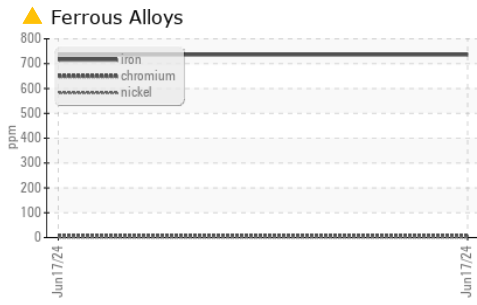

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0010471  
**Lab Number** : 06212635  
**Unique Number** : 11085499  
**Test Package** : CONST

**Received** : 17 Jun 2024  
**Tested** : 20 Jun 2024  
**Diagnosed** : 20 Jun 2024 - Jonathan Hester

**117 - ASCENDUM MACHINERY INC - GREENVILLE**  
 2002 N GREENE ST  
 GREENVILLE, NC  
 US 27834  
 Contact: GREG SUGGS

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (252)754-5280  
 F: (704)494-8197