



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A45GFS 352466
Component
Front Axle
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011011	VCP443115	---
Sample Date		Client Info		29 May 2024	18 Oct 2023	---
Machine Age	hrs	Client Info		3913	3241	---
Oil Age	hrs	Client Info		3913	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Not Chngd	---
Filter Changed		Client Info		N/A	Not Chngd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	104	86	---
Chromium	ppm	ASTM D5185m	>20	2	1	---
Nickel	ppm	ASTM D5185m	>10	1	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	<1	0	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>150	2	<1	---
Tin	ppm	ASTM D5185m	>20	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>50	4	3	---
Potassium	ppm	ASTM D5185m	>20	4	1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	MODER	MODER	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	2	---
Boron	ppm	ASTM D5185m	111	217	238	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.9	3	2	---
Manganese	ppm	ASTM D5185m	0.0	11	9	---
Magnesium	ppm	ASTM D5185m	39	2	0	---
Calcium	ppm	ASTM D5185m	93	24	19	---
Phosphorus	ppm	ASTM D5185m	920	1407	1350	---
Zinc	ppm	ASTM D5185m	104	18	15	---
Sulfur	ppm	ASTM D5185m	20179	28349	24266	---

Ferrous Alloys

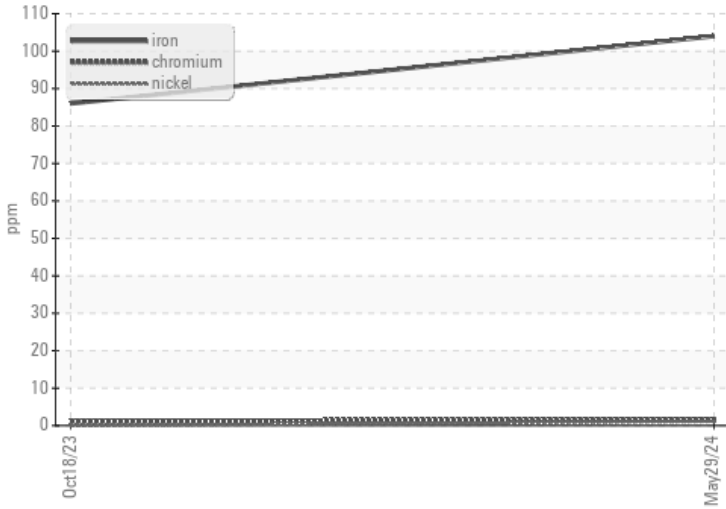

Non-ferrous Metals

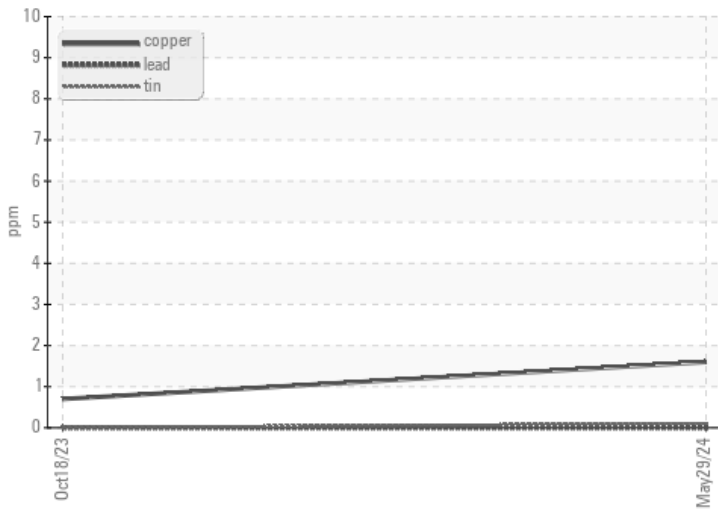

Viscosity @ 40°C



Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0011011
Lab Number : 06212641
Unique Number : 11085505
Test Package : CONST

Received : 17 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 19 Jun 2024 - Angela Borella

117 - ASCENDUM MACHINERY INC - GREENVILLE
 2002 N GREENE ST
 GREENVILLE, NC
 US 27834

Contact: ALLEN WILLIAMS
 allen.williams@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (704)494-8197