



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
VOLVO 623322
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011080	---	---
Sample Date		Client Info		29 May 2024	---	---
Machine Age	hrs	Client Info		545	---	---
Oil Age	hrs	Client Info		545	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a components first oil change.

Iron	ppm	ASTM D5185m	>100	21	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>2	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>25	12	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	7	---	---
Tin	ppm	ASTM D5185m	>15	3	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	20	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel		WC Method	>6.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.1	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.3	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m		47	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		41	---	---
Manganese	ppm	ASTM D5185m		5	---	---
Magnesium	ppm	ASTM D5185m		606	---	---
Calcium	ppm	ASTM D5185m		1594	---	---
Phosphorus	ppm	ASTM D5185m		1031	---	---
Zinc	ppm	ASTM D5185m		1172	---	---
Sulfur	ppm	ASTM D5185m		3972	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		10.0	---	---
Visc @ 100°C	cSt	ASTM D445		12.5	---	---

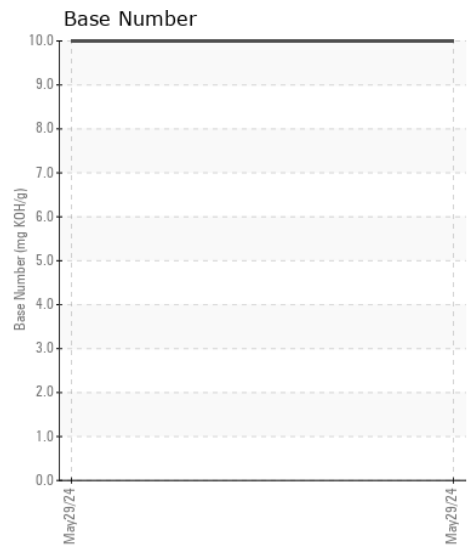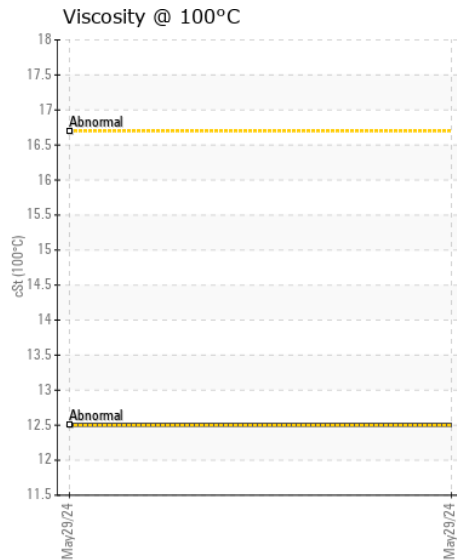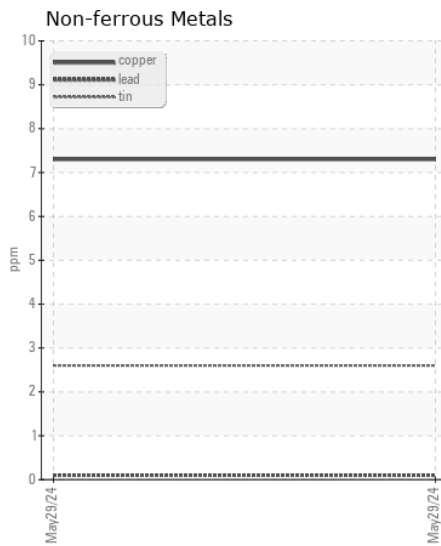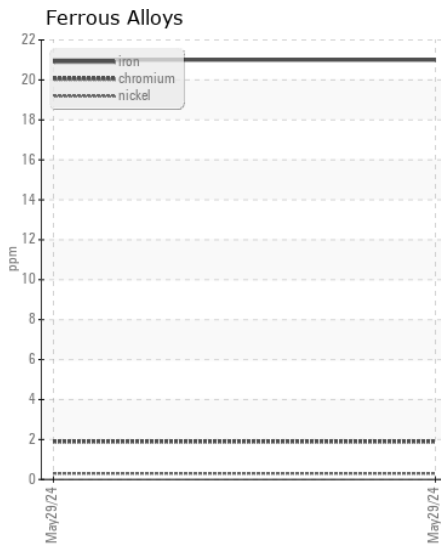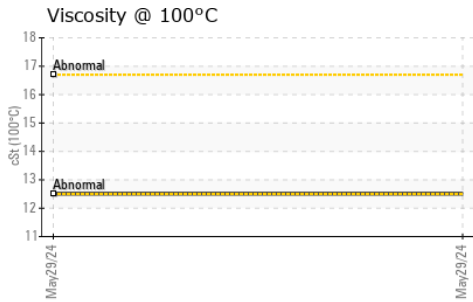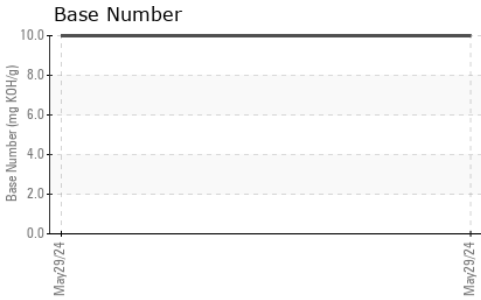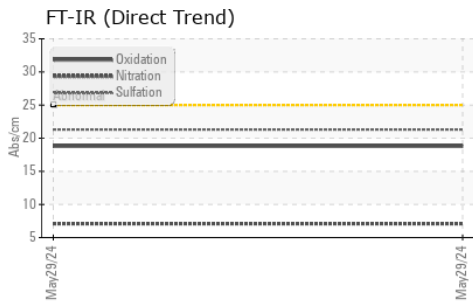

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0011080 **Received** : 17 Jun 2024
Lab Number : 06212749 **Tested** : 19 Jun 2024
Unique Number : 11085613 **Diagnosed** : 19 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

117 - ASCENDUM MACHINERY INC - GREENVILLE
 2002 N GREENE ST
 GREENVILLE, NC
 US 27834
 Contact: ALLEN WILLIAMS
 allen.williams@ascendummachinery.com
 T:
 F: (704)494-8197

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)