



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**COVINGTON**  
Component  
**Starboard Genset**  
Fluid  
**CHEVRON DELO 400 MULTIGRADE 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0069920</b>	MW0069954	MW0057054
Sample Date		Client Info		<b>09 Jun 2024</b>	20 Apr 2024	06 Mar 2024
Machine Age	hrs	Client Info		<b>42173</b>	41668	41193
Oil Age	hrs	Client Info		<b>500</b>	475	500
Filter Age	hrs	Client Info		<b>500</b>	475	500
Oil Changed		Client Info		<b>N/A</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>4</b>	5	4
Chromium	ppm	ASTM D5185m	>4	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>15</b>	15	14
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>12	<b>2</b>	2	1
Lead	ppm	ASTM D5185m	>17	<b>0</b>	1	1
Copper	ppm	ASTM D5185m	>70	<b>1</b>	1	1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>4</b>	5	4
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	3	<1
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.9</b>	9.7	9.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.1</b>	18.8	18.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	<1	1
Boron	ppm	ASTM D5185m	151	<b>61</b>	73	82
Barium	ppm	ASTM D5185m	0.4	<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m	250	<b>31</b>	32	30
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	0	<b>741</b>	672	693
Calcium	ppm	ASTM D5185m	2046	<b>1552</b>	1497	1423
Phosphorus	ppm	ASTM D5185m	1043	<b>754</b>	736	683
Zinc	ppm	ASTM D5185m	943	<b>853</b>	819	774
Sulfur	ppm	ASTM D5185m	5012	<b>3621</b>	3361	2980
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.5</b>	15.9	15.4
Base Number (BN)	mg KOH/g	ASTM D2896	12.5	<b>7.7</b>	7.5	7.9
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.6</b>	12.5	12.8


**FT-IR (Direct Trend)**

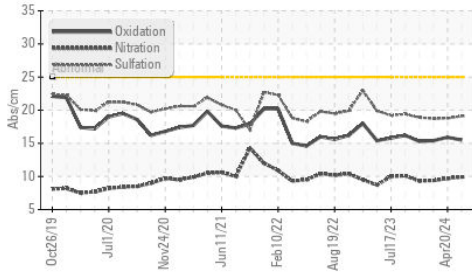


**Base Number**

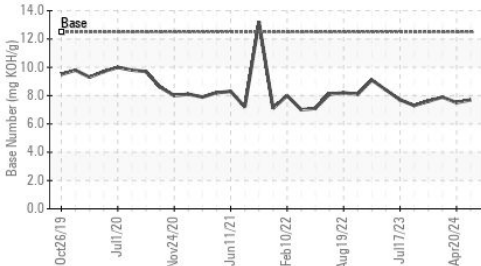


**Viscosity @ 100°C**

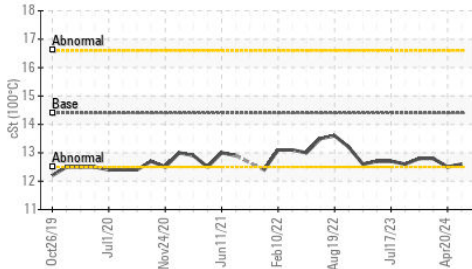


**Acid Number**

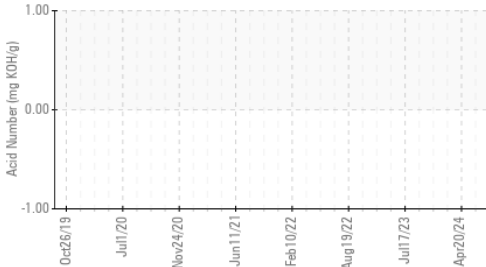


**Ferrous Alloys**

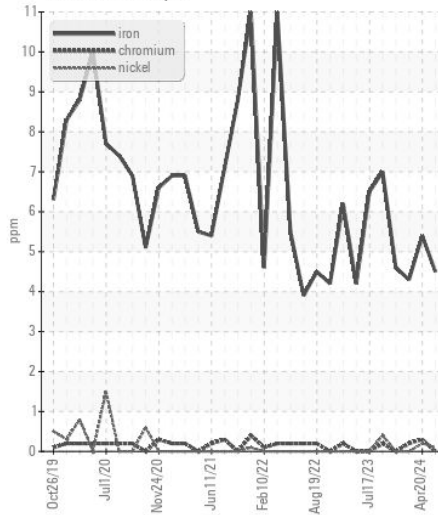


**Non-ferrous Metals**

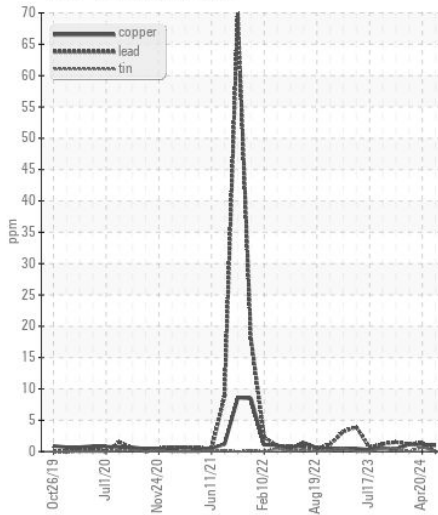

**Viscosity @ 100°C**

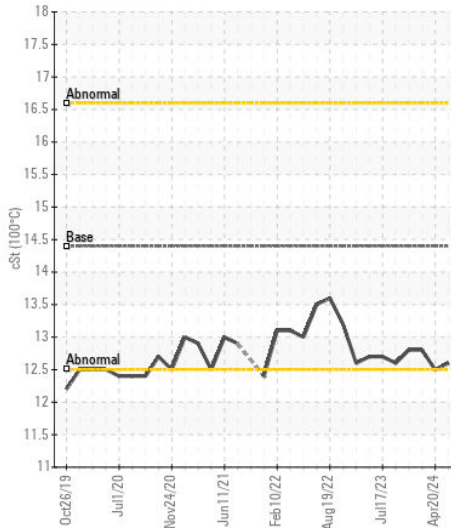

**Acid Number**

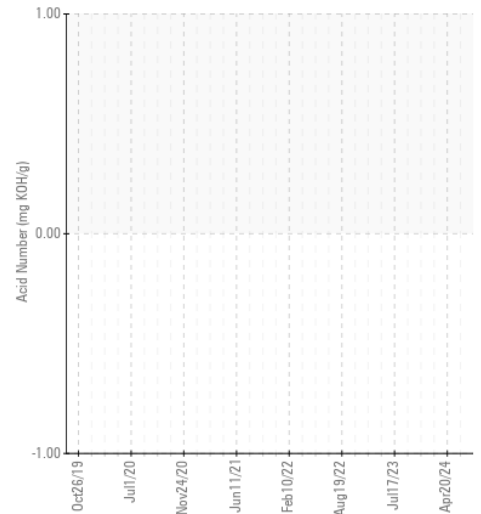

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW0069920

**Lab Number** : 06212774

**Unique Number** : 11085638

**Test Package** : MAR 2 ( Additional Tests: TAN Man )

**Received** : 17 Jun 2024

**Tested** : 19 Jun 2024

**Diagnosed** : 19 Jun 2024 - Angela Borella

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**C & B MARINE**  
50 E RIVERCENTER BLVD, SUITE 1180

COVINGTON, KY

US 41011

Contact: DAVID WESTRICH

dwestrich@carlislebray.com

T: (812)290-4063

F: (859)655-7504