



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
61025
 Component
Diesel Engine
 Fluid
MOBIL 1 TURBO DIESEL TRUCK 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0936737	WC0409982	---
Sample Date		Client Info		07 Jun 2024	20 May 2020	---
Machine Age	mls	Client Info		0	122076	---
Oil Age	mls	Client Info		10000	0	---
Filter Age	mls	Client Info		10000	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	8	11	---
Chromium	ppm	ASTM D5185m	>20	0	<1	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	<1	---
Aluminum	ppm	ASTM D5185m	>20	4	4	---
Lead	ppm	ASTM D5185m	>40	0	<1	---
Copper	ppm	ASTM D5185m	>330	5	9	---
Tin	ppm	ASTM D5185m	>15	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	7	7	---
Potassium	ppm	ASTM D5185m	>20	5	8	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	5.4	7.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.6	19	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	3	---
Boron	ppm	ASTM D5185m		338	8	---
Barium	ppm	ASTM D5185m		0	2	---
Molybdenum	ppm	ASTM D5185m		84	6	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		430	49	---
Calcium	ppm	ASTM D5185m		1356	2306	---
Phosphorus	ppm	ASTM D5185m	1100	948	816	---
Zinc	ppm	ASTM D5185m		1110	952	---
Sulfur	ppm	ASTM D5185m		3495	2666	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.2	10.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	8.0	7	---
Visc @ 100°C	cSt	ASTM D445	14.5	12.6	13.7	---


FT-IR (Direct Trend)

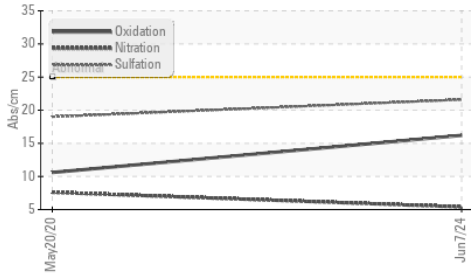


Base Number

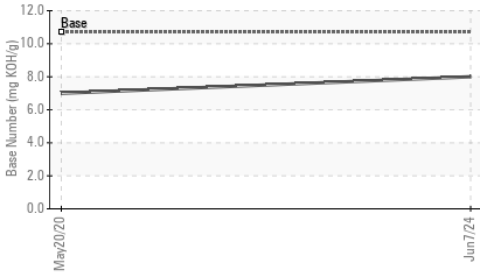


Viscosity @ 100°C

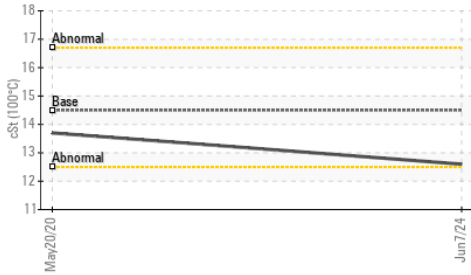


Ferrous Alloys

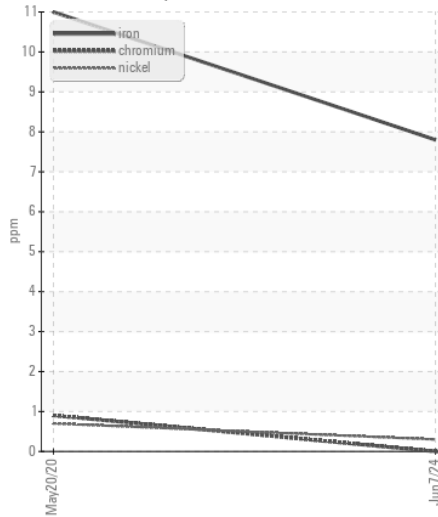


Non-ferrous Metals

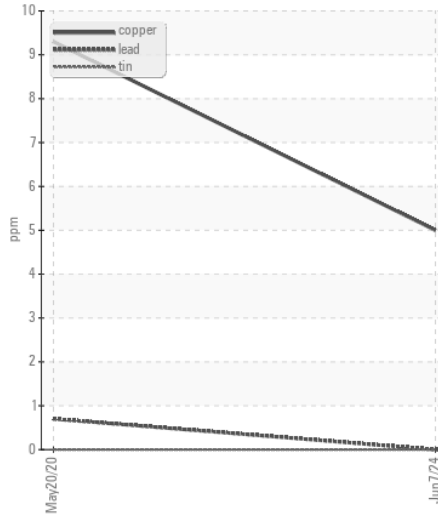

Viscosity @ 100°C

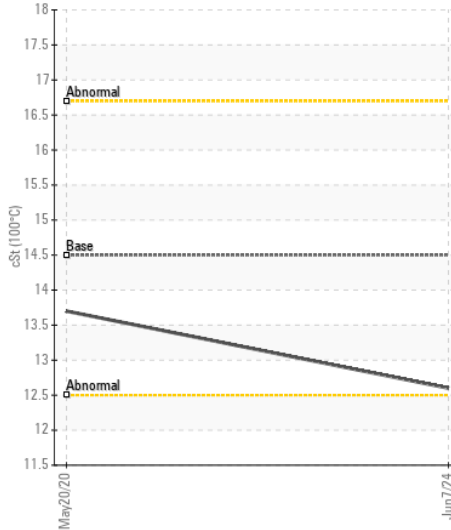

Base Number

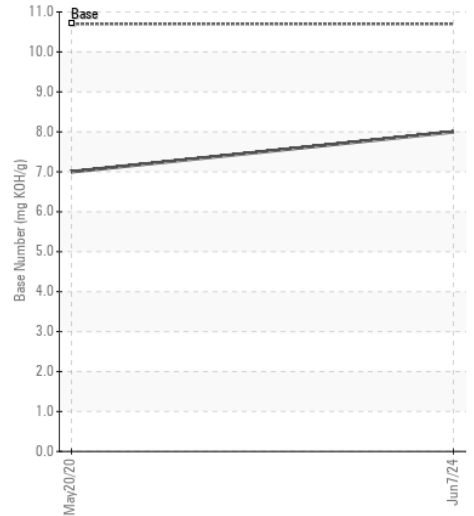

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0936737

Lab Number : 06212783

Unique Number : 11085647

Test Package : FLEET

Received : 17 Jun 2024

Tested : 19 Jun 2024

Diagnosed : 19 Jun 2024 - Angela Borella

SALEM NATIONALEASE CORPORATION

198 PARK PLAZA DRIVE

WINSTON SALEM, NC

US 27105

Contact: Audrey Hopkins

Audrey.Hopkins@salemcorp.com

T: (336)767-9642

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)