



WEAR CHECK

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
2-291
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0895200	WC0926255	WC0899964
Sample Date		Client Info		11 Jun 2024	11 Apr 2024	14 Feb 2024
Machine Age	hrs	Client Info		2257	1493	747
Oil Age	hrs	Client Info		764	746	747
Filter Age	hrs	Client Info		764	746	747
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	12	14	20
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>3	<1	0	<1
Aluminum	ppm	ASTM D5185m	>20	11	6	9
Lead	ppm	ASTM D5185m	>40	0	4	0
Copper	ppm	ASTM D5185m	>330	90	▲ 349	316
Tin	ppm	ASTM D5185m	>15	<1	2	3
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	15	6	6
Potassium	ppm	ASTM D5185m	>20	45	36	10
Fuel		WC Method	>5	<1.0	<1.0	0.2
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol	%	*ASTM D2982		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.3	9.9	9.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.7	20.3	21.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>158	3	5	<1
Boron	ppm	ASTM D5185m	250	20	40	45
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	56	21	40
Manganese	ppm	ASTM D5185m		1	<1	2
Magnesium	ppm	ASTM D5185m	450	256	680	516
Calcium	ppm	ASTM D5185m	3000	2098	1427	1605
Phosphorus	ppm	ASTM D5185m	1150	799	666	701
Zinc	ppm	ASTM D5185m	1350	986	776	845
Sulfur	ppm	ASTM D5185m	4250	3200	2543	1982
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.2	18.7	22.3
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.9	6.4	8.2
Visc @ 100°C	cSt	ASTM D445	14.4	13.1	12.8	● 9.7


FT-IR (Direct Trend)

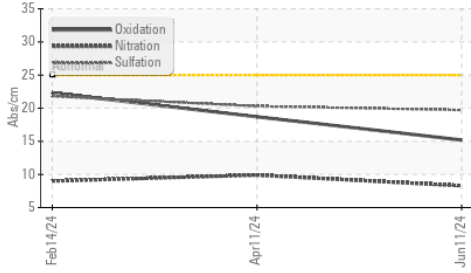


Ferrous Alloys

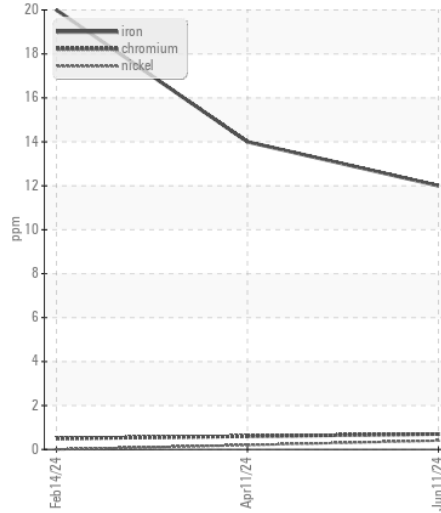


Base Number

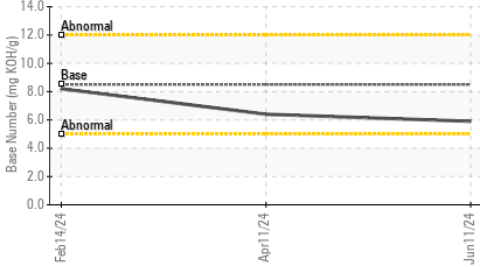


Non-ferrous Metals

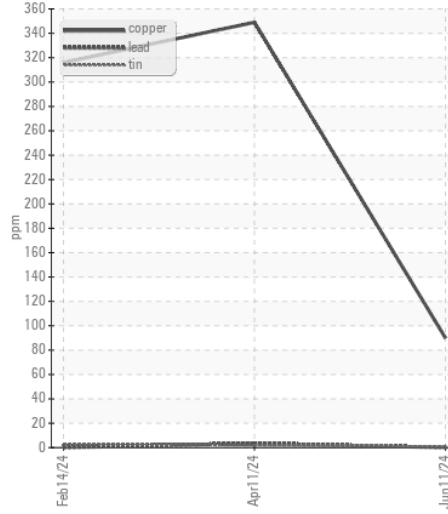


Viscosity @ 100°C

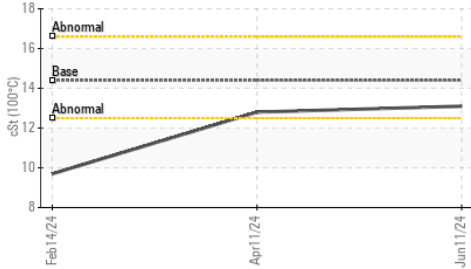


Glycol Contamination

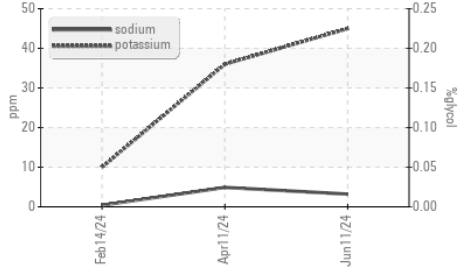

Viscosity @ 100°C

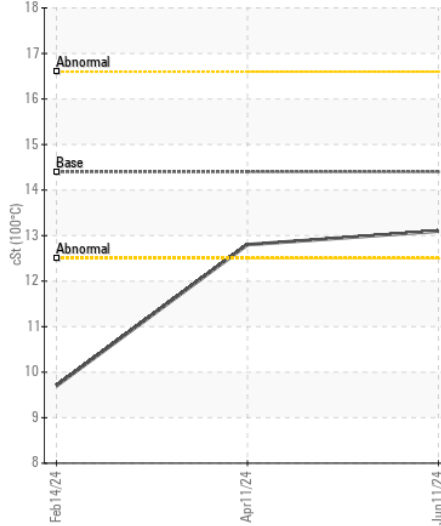

Base Number

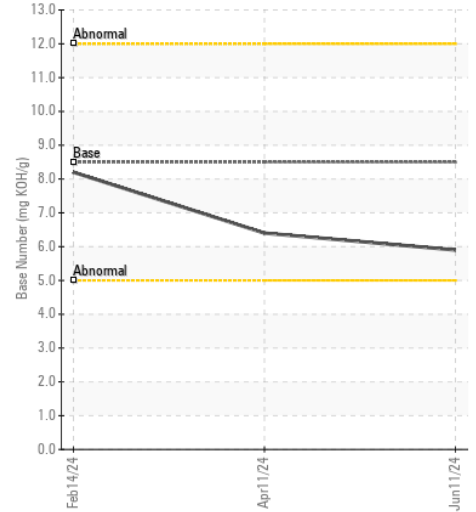

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0895200 **Received** : 17 Jun 2024
Lab Number : 06212788 **Tested** : 19 Jun 2024
Unique Number : 11085652 **Diagnosed** : 19 Jun 2024 - Angela Borella
Test Package : FLEET (Additional Tests: Glycol)

ALASKA WEST EXPRESS
 1095 SANDURI STREET
 FAIRBANKS, AK
 US 99701
 Contact: TOM DOUTHIT
 tdouthit@lynden.com
 T: (907)452-4355
 F: (907)328-1956

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)