



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
2-277
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0895199	WC0926262	WC0899969
Sample Date		Client Info		11 Jun 2024	04 Apr 2024	05 Feb 2024
Machine Age	hrs	Client Info		2325	1547	779
Oil Age	hrs	Client Info		778	768	779
Filter Age	hrs	Client Info		778	768	779
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	18	17	46
Chromium	ppm	ASTM D5185m	>20	1	<1	1
Nickel	ppm	ASTM D5185m	>4	<1	<1	2
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	<1	0	<1
Aluminum	ppm	ASTM D5185m	>20	12	7	13
Lead	ppm	ASTM D5185m	>40	0	4	<1
Copper	ppm	ASTM D5185m	>330	76	360	391
Tin	ppm	ASTM D5185m	>15	<1	1	5
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	20	6	12
Potassium	ppm	ASTM D5185m	>20	44	38	31
Fuel		WC Method	>5	<1.0	<1.0	0.2
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.5	10.0	10.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.8	20.6	22.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	3	5	2
Boron	ppm	ASTM D5185m	250	21	34	56
Barium	ppm	ASTM D5185m	10	0	0	14
Molybdenum	ppm	ASTM D5185m	100	70	21	61
Manganese	ppm	ASTM D5185m		1	<1	4
Magnesium	ppm	ASTM D5185m	450	328	665	735
Calcium	ppm	ASTM D5185m	3000	2013	1494	2302
Phosphorus	ppm	ASTM D5185m	1150	795	664	958
Zinc	ppm	ASTM D5185m	1350	965	787	1164
Sulfur	ppm	ASTM D5185m	4250	3177	2522	3043
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.7	19.1	23.2
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.6	6.4	7.8
Visc @ 100°C	cSt	ASTM D445	14.4	13.2	12.8	9.8

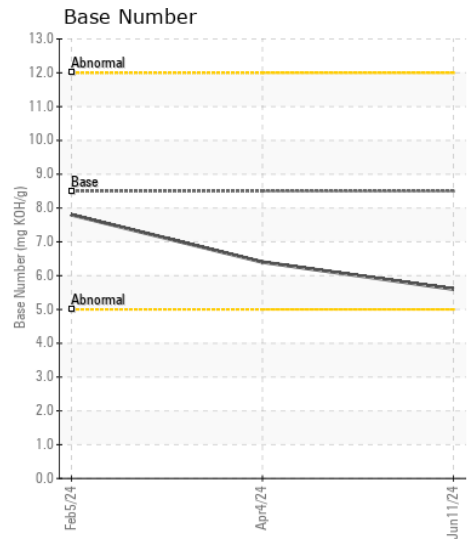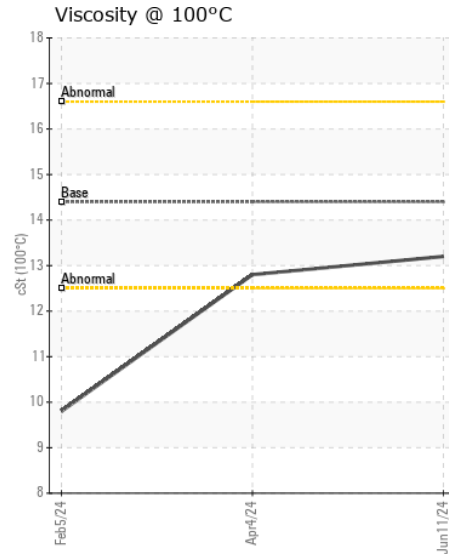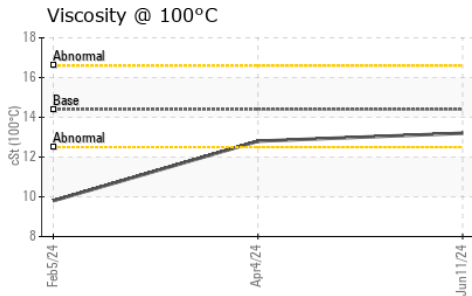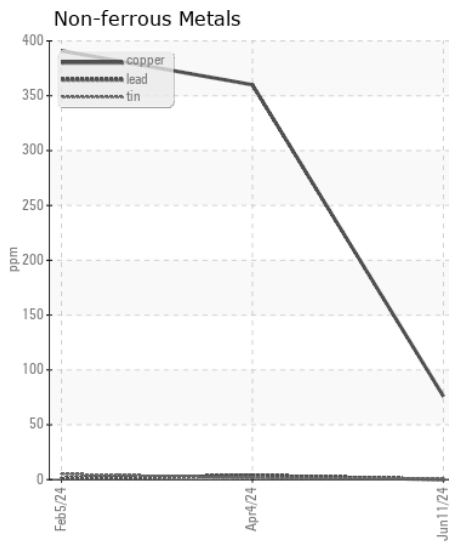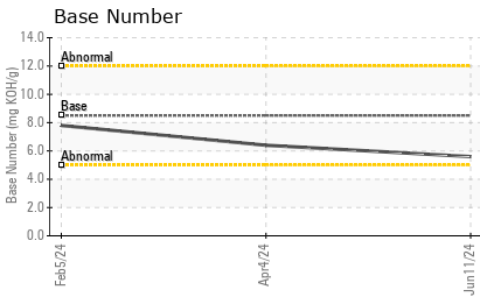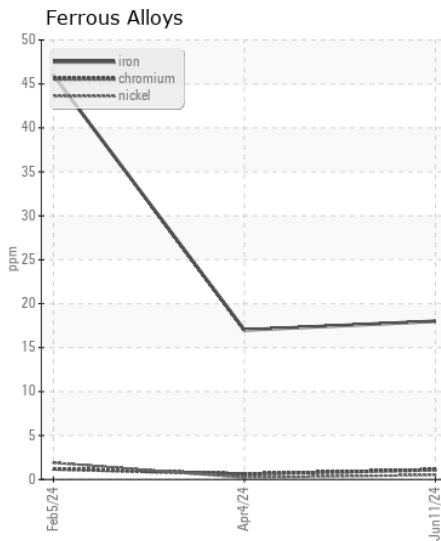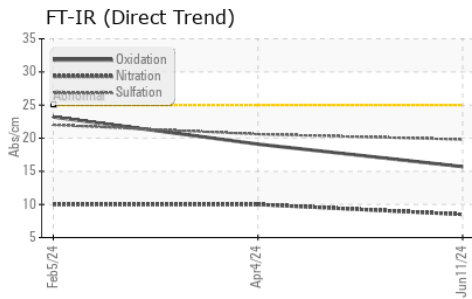

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0895199 **Received** : 17 Jun 2024
Lab Number : 06212789 **Tested** : 19 Jun 2024
Unique Number : 11085653 **Diagnosed** : 19 Jun 2024 - Wes Davis
Test Package : FLEET

ALASKA WEST EXPRESS
 1095 SANDURI STREET
 FAIRBANKS, AK
 US 99701
 Contact: TOM DOUTHIT
 tdouthit@lynden.com
 T: (907)452-4355
 F: (907)328-1956

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)