



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
1123M
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0114380	GFL0110115	---
Sample Date		Client Info		07 Jun 2024	13 Feb 2024	---
Machine Age	hrs	Client Info		0	12638	---
Oil Age	hrs	Client Info		0	12638	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	17	12	---
Chromium	ppm	ASTM D5185m	>20	1	<1	---
Nickel	ppm	ASTM D5185m	>2	<1	0	---
Titanium	ppm	ASTM D5185m	>2	0	<1	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>30	12	7	---
Lead	ppm	ASTM D5185m	>30	0	0	---
Copper	ppm	ASTM D5185m	>30	4	3	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	5	4	---
Potassium	ppm	ASTM D5185m	>20	20	12	---
Fuel		WC Method	>3.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.6	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	8.7	7.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.5	19.3	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	2	---
Boron	ppm	ASTM D5185m	0	4	2	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	60	59	55	---
Manganese	ppm	ASTM D5185m	0	<1	<1	---
Magnesium	ppm	ASTM D5185m	1010	940	919	---
Calcium	ppm	ASTM D5185m	1070	1107	1017	---
Phosphorus	ppm	ASTM D5185m	1150	1087	1008	---
Zinc	ppm	ASTM D5185m	1270	1298	1246	---
Sulfur	ppm	ASTM D5185m	2060	3297	2896	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.9	14.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.4	8.1	---
Visc @ 100°C	cSt	ASTM D445	15.4	14.3	14.3	---

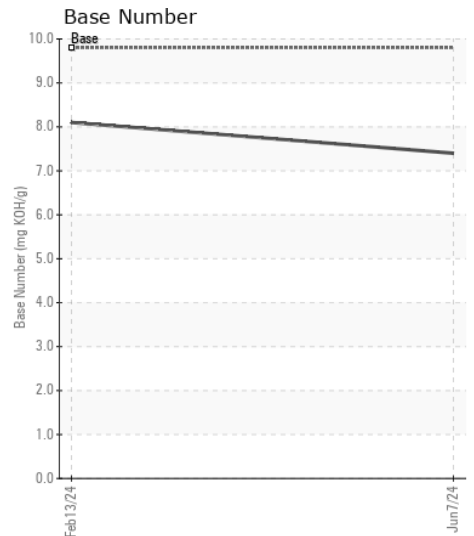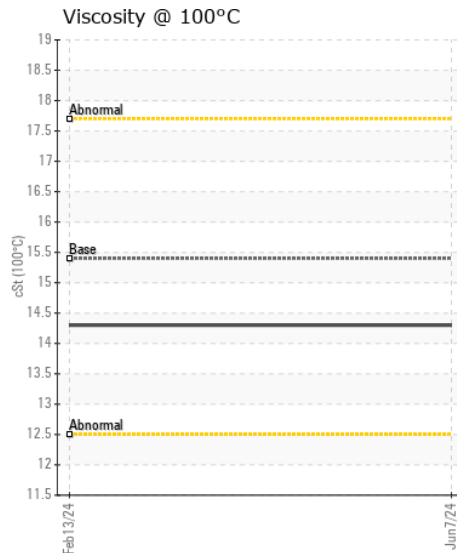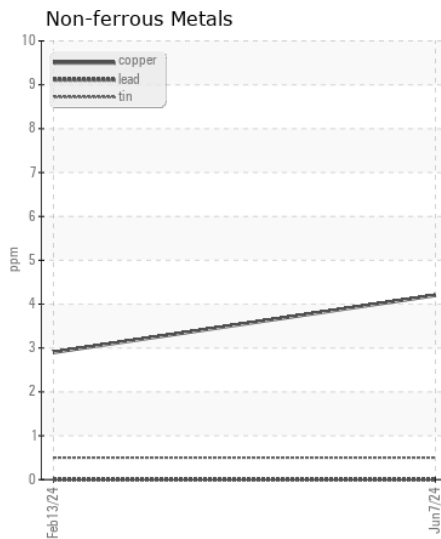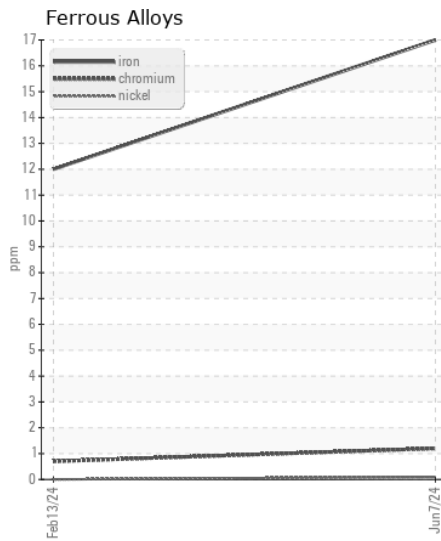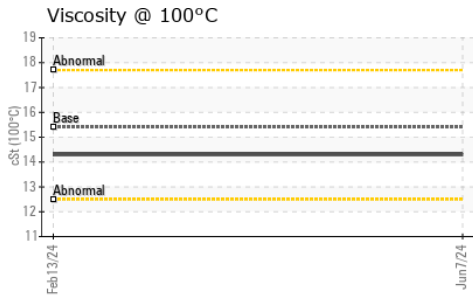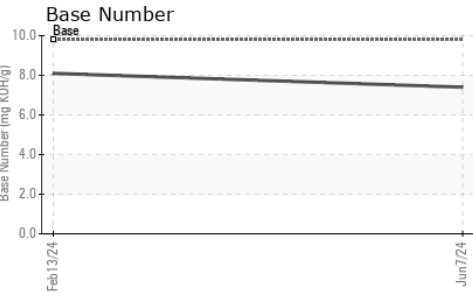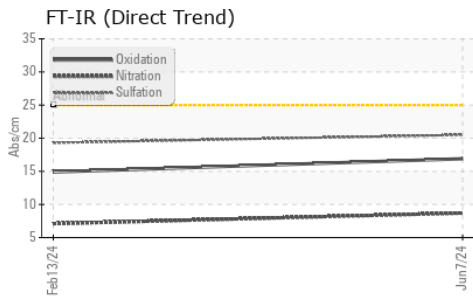

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0114380
Lab Number : 06212814
Unique Number : 11085678
Test Package : FLEET

GFL Environmental - 468 - Dearborn
 3051 Schaefer Rd
 Dearborn, MI
 US 48126
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: