



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**WALDEN, RICARDO - TLD O/O**  
Machine Id  
**NAVISTAR 3019370**  
Component  
**Diesel Engine**  
Fluid  
**{not provided} (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		NL0001762	---	---
Sample Date		Client Info		07 Jun 2024	---	---
Machine Age	mls	Client Info		521027	---	---
Oil Age	mls	Client Info		115231	---	---
Filter Age	mls	Client Info		115231	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	21	---	---
Chromium	ppm	ASTM D5185m	>20	1	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>40	2	---	---
Copper	ppm	ASTM D5185m	>330	1	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	12.1	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.7	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m		13	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		59	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		1084	---	---
Calcium	ppm	ASTM D5185m		899	---	---
Phosphorus	ppm	ASTM D5185m		1052	---	---
Zinc	ppm	ASTM D5185m		1288	---	---
Sulfur	ppm	ASTM D5185m		3566	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.7	---	---
Visc @ 100°C	cSt	ASTM D445		12.7	---	---

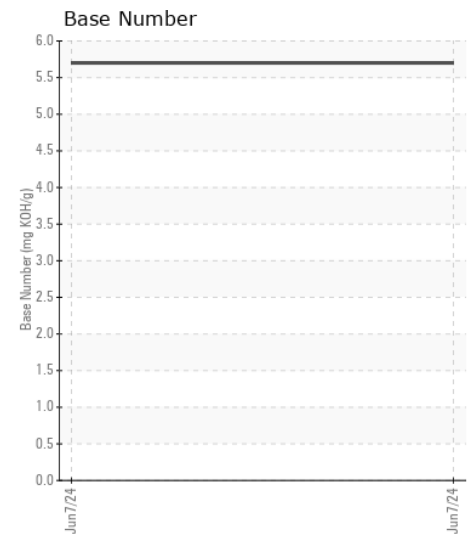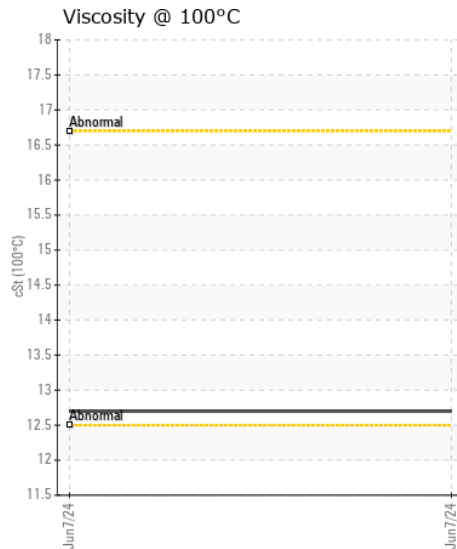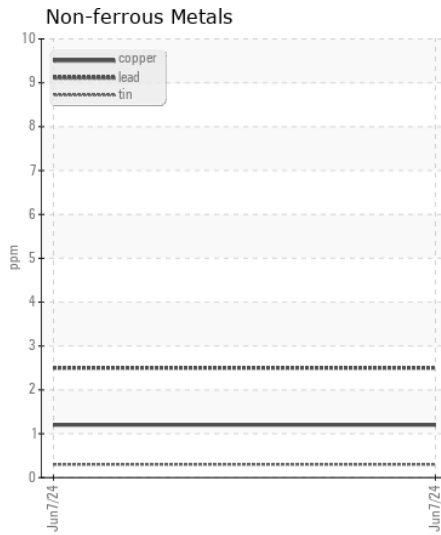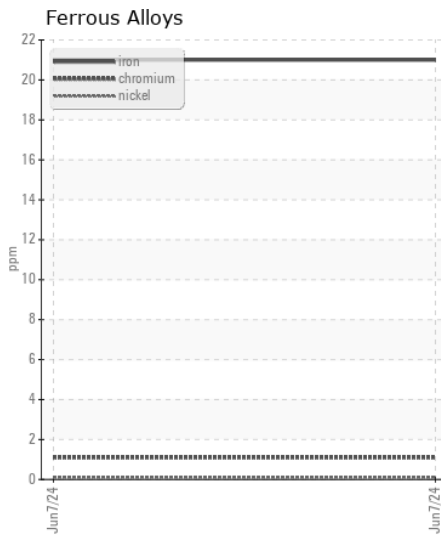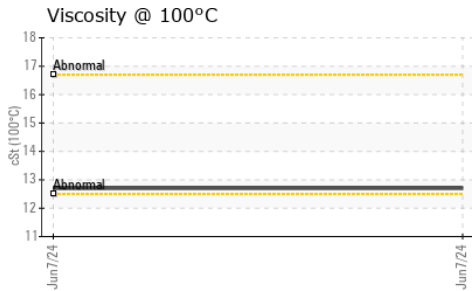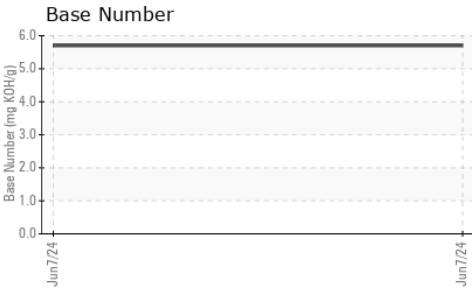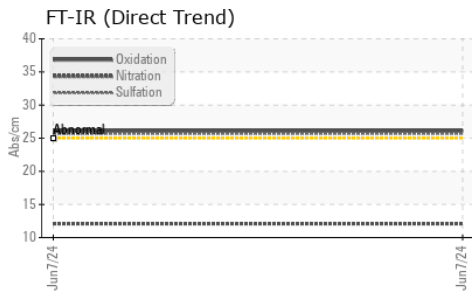

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : NL0001762

**Lab Number** : 06212894

**Unique Number** : 11085758

**Test Package** : FLEET

**Received** : 17 Jun 2024

**Tested** : 19 Jun 2024

**Diagnosed** : 19 Jun 2024 - Angela Borella

**KIRK NATIONALEASE - SHOP 50**

610 ST MATTHEWS CHURCH RD

LINCOLNNTON, NC

US 28092

Contact: Roger Kilby

shop50@knl.cc

T: (828)428-9082

F: (828)428-9084

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)