



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
423019-863
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 XLE 15W40 (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0104693	GFL0104589	GFL0096241
Sample Date		Client Info		12 Jun 2024	04 Feb 2024	20 Nov 2023
Machine Age	hrs	Client Info		17208	17113	17010
Oil Age	hrs	Client Info		17208	0	240
Filter Age	hrs	Client Info		17208	0	240
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	17	10	9
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	<1
Titanium	ppm	ASTM D5185m		5	4	5
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	4	4	2
Lead	ppm	ASTM D5185m	>40	1	1	2
Copper	ppm	ASTM D5185m	>330	1	<1	1
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	6	6
Potassium	ppm	ASTM D5185m	>20	6	3	3
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.7	8.2	7.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.9	21.5	21.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		8	6	0
Boron	ppm	ASTM D5185m		221	216	243
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		91	88	91
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		648	631	642
Calcium	ppm	ASTM D5185m		1494	1414	1507
Phosphorus	ppm	ASTM D5185m	760	820	675	676
Zinc	ppm	ASTM D5185m	830	892	849	833
Sulfur	ppm	ASTM D5185m	2770	2691	2623	2923
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.8	15.6	15.4
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	7.8	8.2	8.2
Visc @ 100°C	cSt	ASTM D445	14.9	13.4	13.5	13.4

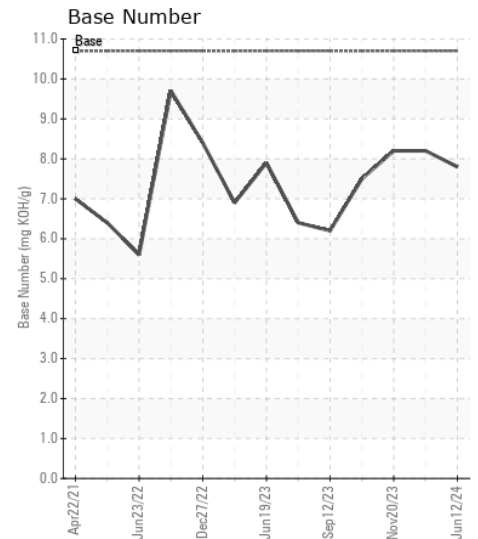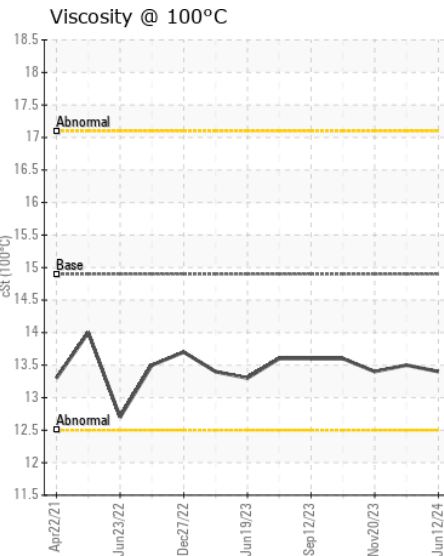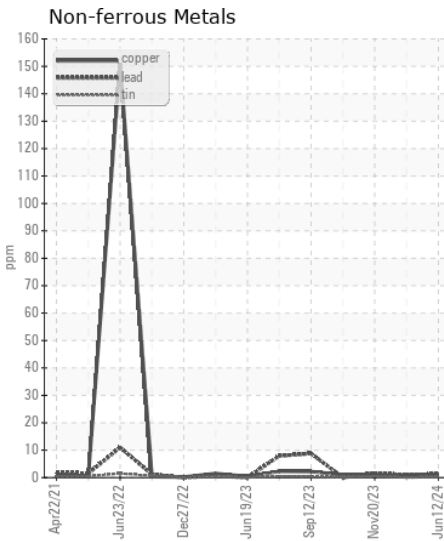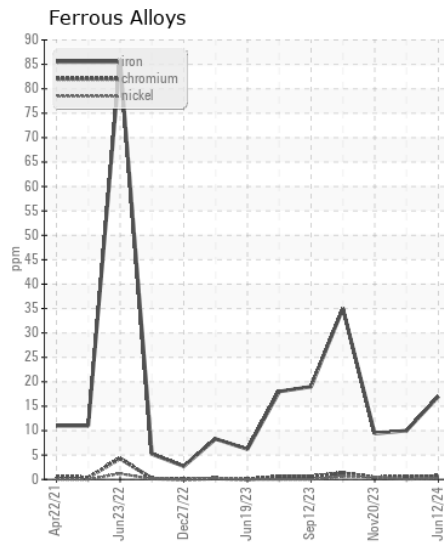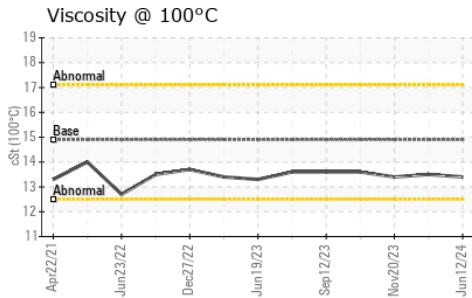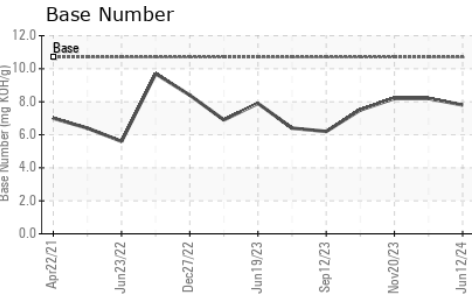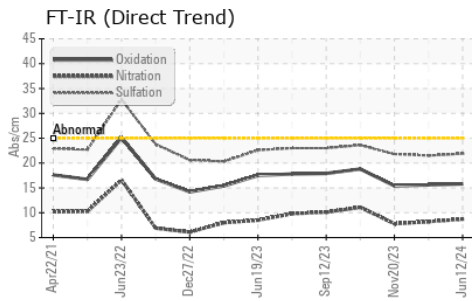

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0104693
Lab Number : 06212920
Unique Number : 11085784
Test Package : FLEET

Received : 17 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 19 Jun 2024 - Wes Davis

GFL Environmental - 624 - Elmira Hauling
 10164 M-32
 Elmira, MI
 US 49730

Contact: ANDY GROBASKI
 andyg@americanwaste.org

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (989)370-2941

F: