



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id
31019
 Component
Diesel Engine
 Fluid
MOBIL 15W40 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

WEAR

Metal levels are typical for a new component breaking in.

CONTAMINATION


Fuel content negligible. There is no indication of any contamination in the oil.

FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0829703	---	---
Sample Date		Client Info		10 Jun 2024	---	---
Machine Age	mls	Client Info		9128	---	---
Oil Age	mls	Client Info		9128	---	---
Filter Age	mls	Client Info		9128	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---
Iron	ppm	ASTM D5185m	>100	143	---	---
Chromium	ppm	ASTM D5185m	>20	3	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	9	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	62	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>25	30	---	---
Potassium	ppm	ASTM D5185m	>20	10	---	---
Fuel	%	ASTM D3524	>5	1.3	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.8	---	---
Nitration	Abs/cm	*ASTM D7624	>20	13.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.6	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m	>118	6	---	---
Boron	ppm	ASTM D5185m		14	---	---
Barium	ppm	ASTM D5185m		6	---	---
Molybdenum	ppm	ASTM D5185m		48	---	---
Manganese	ppm	ASTM D5185m		6	---	---
Magnesium	ppm	ASTM D5185m		732	---	---
Calcium	ppm	ASTM D5185m		1187	---	---
Phosphorus	ppm	ASTM D5185m		714	---	---
Zinc	ppm	ASTM D5185m		850	---	---
Sulfur	ppm	ASTM D5185m		2026	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.8	---	---
Visc @ 100°C	cSt	ASTM D445		11.6	---	---


● Viscosity @ 100°C

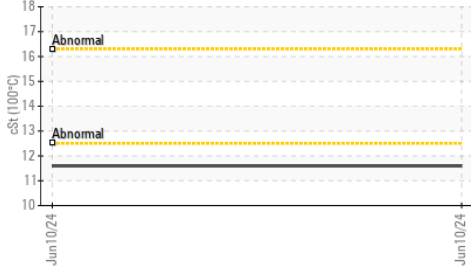


Ferrous Alloys

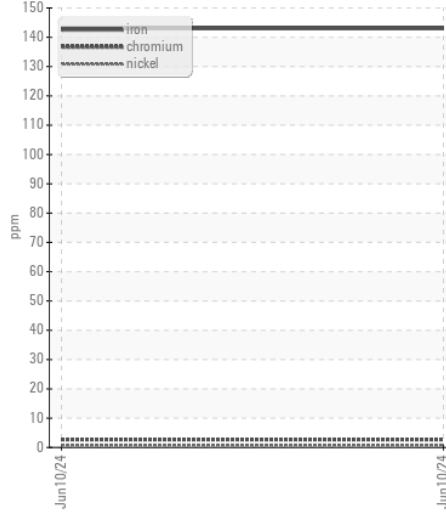


Fuel Dilution

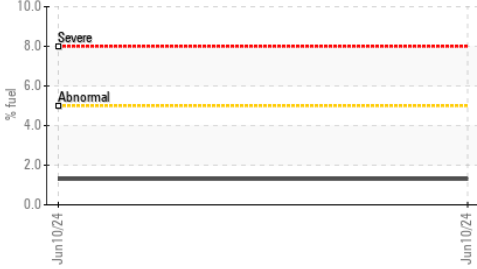


Non-ferrous Metals

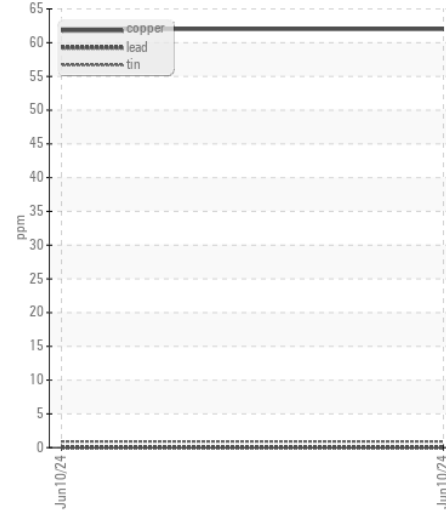


FT-IR (Direct Trend)

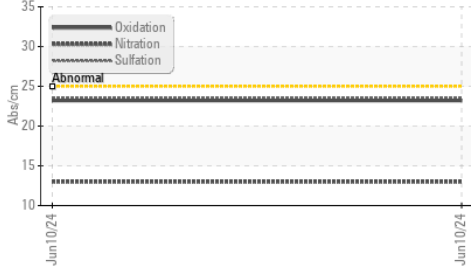


Base Number

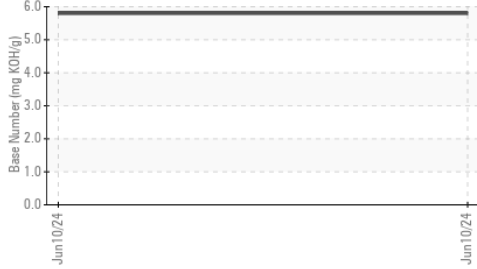

● Viscosity @ 100°C

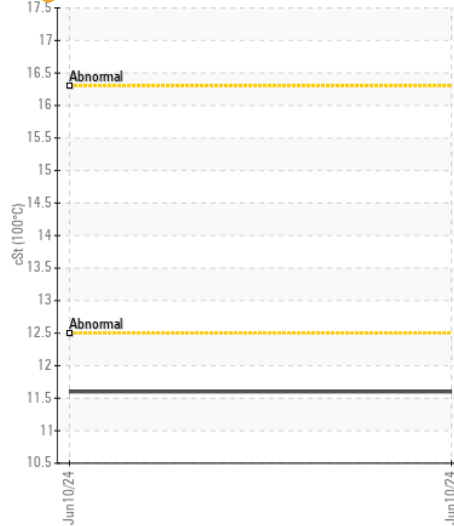

Base Number

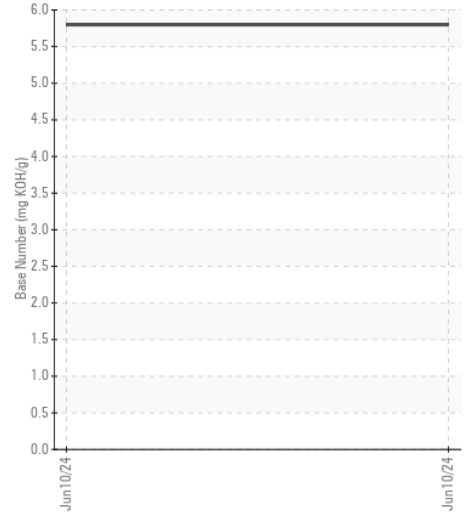

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0829703

Lab Number : 06212930

Unique Number : 11085794

Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

Received : 17 Jun 2024

Tested : 20 Jun 2024

Diagnosed : 20 Jun 2024 - Sean Felton

SALEM NATIONALEASE CORPORATION

198 PARK PLAZA DRIVE

WINSTON SALEM, NC

US 27105

Contact: Audrey Hopkins

Audrey.Hopkins@salemcorp.com

T: (336)767-9642

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)