



WEAR CHECK

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
58000
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.
 Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0883192	WC0883303	WC0796035
Sample Date		Client Info		07 Jun 2024	22 Dec 2023	09 Jul 2023
Machine Age	mls	Client Info		0	34781	25000
Oil Age	mls	Client Info		0	34781	11623
Filter Age	mls	Client Info		25000	34781	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	24	33	31
Chromium	ppm	ASTM D5185m	>20	1	2	2
Nickel	ppm	ASTM D5185m	>4	<1	<1	1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	<1	0	1
Aluminum	ppm	ASTM D5185m	>20	13	30	49
Lead	ppm	ASTM D5185m	>40	<1	1	0
Copper	ppm	ASTM D5185m	>330	106	148	190
Tin	ppm	ASTM D5185m	>15	2	3	8
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	6	6	7
Potassium	ppm	ASTM D5185m	>20	26	70	117
Fuel		WC Method	>5	<1.0	<1.0	0.3
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.6	0.7	0.4
Nitration	Abs/cm	*ASTM D7624	>20	7.9	8.8	7.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.9	21.6	23.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	2	2	5
Boron	ppm	ASTM D5185m	250	190	10	44
Barium	ppm	ASTM D5185m	10	<1	0	0
Molybdenum	ppm	ASTM D5185m	100	77	63	42
Manganese	ppm	ASTM D5185m		<1	1	4
Magnesium	ppm	ASTM D5185m	450	522	925	561
Calcium	ppm	ASTM D5185m	3000	1311	1227	1671
Phosphorus	ppm	ASTM D5185m	1150	1068	912	789
Zinc	ppm	ASTM D5185m	1350	1201	1173	969
Sulfur	ppm	ASTM D5185m	4250	2922	2328	2804
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.0	18.2	21.9
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.8	7.8	9.0
Visc @ 100°C	cSt	ASTM D445	14.4	13.2	12.5	9.9


FT-IR (Direct Trend)

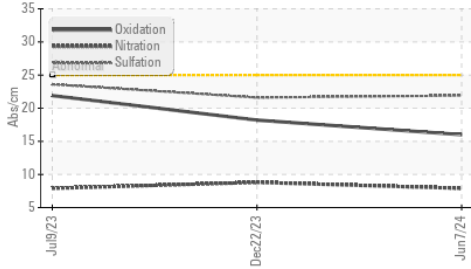


Ferrous Alloys

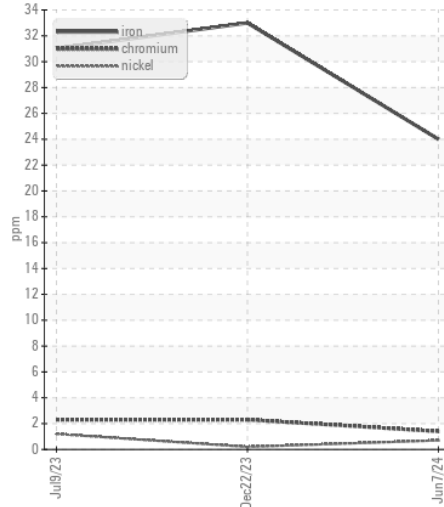


Base Number

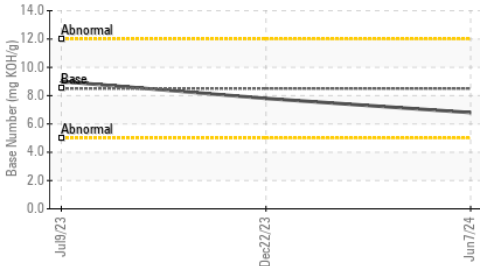


Non-ferrous Metals

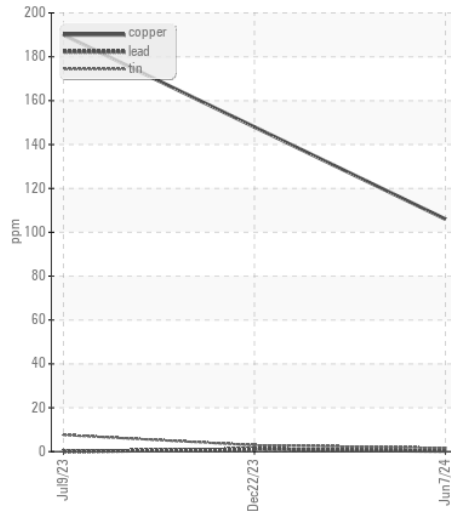


Viscosity @ 100°C

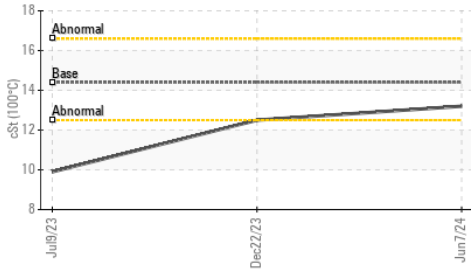

Viscosity @ 100°C

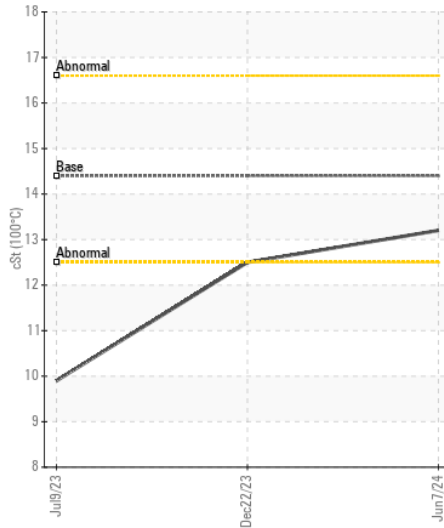

Base Number

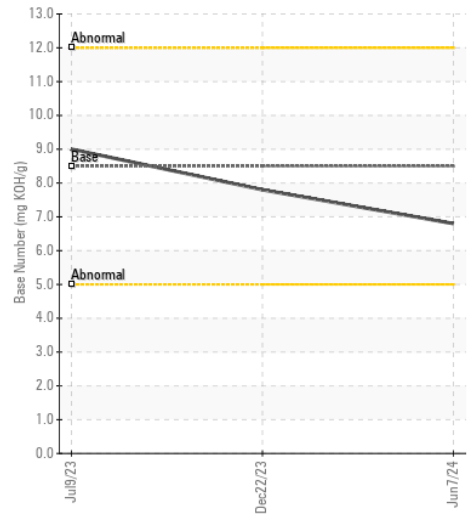

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0883192
Lab Number : 06212981
Unique Number : 11085845
Test Package : FLEET

Received : 17 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 19 Jun 2024 - Wes Davis

SALEM NATIONALEASE CORPORATION
 198 PARK PLAZA DRIVE
 WINSTON SALEM, NC
 US 27105

Contact: Audrey Hopkins
 Audrey.Hopkins@salemcorp.com

T: (336)767-9642

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)