



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
REPAIR / TEST ROOM
Machine Id
TEST BENCH D
Component
Hydraulic System
Fluid
MIL-PRF-5606H (250 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		AN35267	AN35275	AN35297
Sample Date		Client Info		05 Jun 2024	07 Dec 2023	12 Dec 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	0	0	0
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>20	0	0	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	0	0	0
Tin	ppm	ASTM D5185m	>20	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>15	<1	<1	1
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water	%	ASTM D6304	>0.05	0.015	0.010	0.004
ppm Water	ppm	ASTM D6304	>500	150	107	43.5
Particles >4µm		ASTM D7647	>5000	103	▲ 21188	653
Particles >6µm		ASTM D7647	>1300	31	▲ 4229	266
Particles >14µm		ASTM D7647	>160	3	73	12
Particles >21µm		ASTM D7647	>40	2	10	1
Particles >38µm		ASTM D7647	>10	0	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	14/12/9	▲ 22/19/13	17/15/11
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	0	0
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	1
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	<1
Calcium	ppm	ASTM D5185m		0	<1	0
Phosphorus	ppm	ASTM D5185m		752	801	560
Zinc	ppm	ASTM D5185m		<1	0	0
Sulfur	ppm	ASTM D5185m		17	46	141
Acid Number (AN)	mg KOH/g	ASTM D8045	0.1	0.045	0.055	0.071
Visc @ 40°C	cSt	ASTM D445	15.0	8.26	● 8.46	13.6

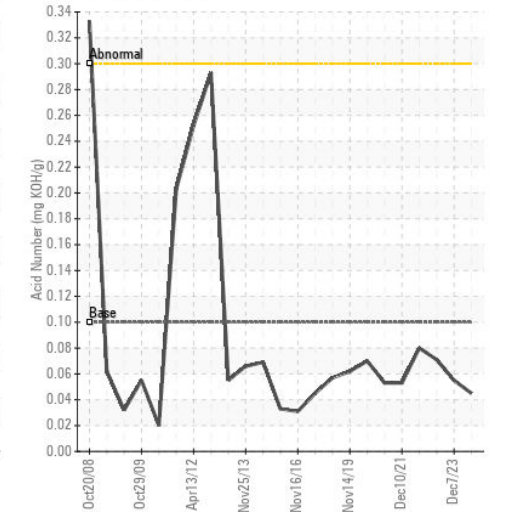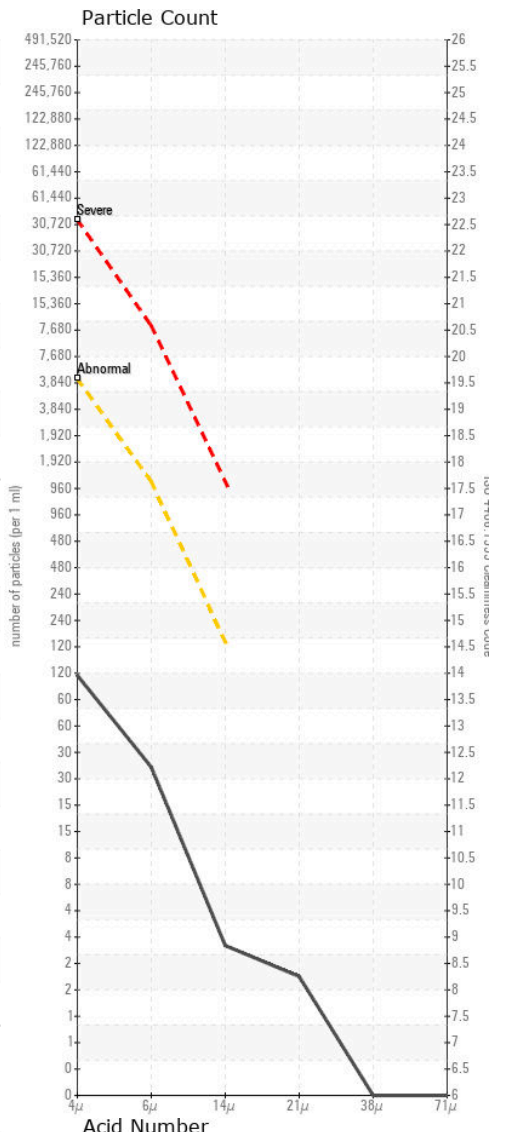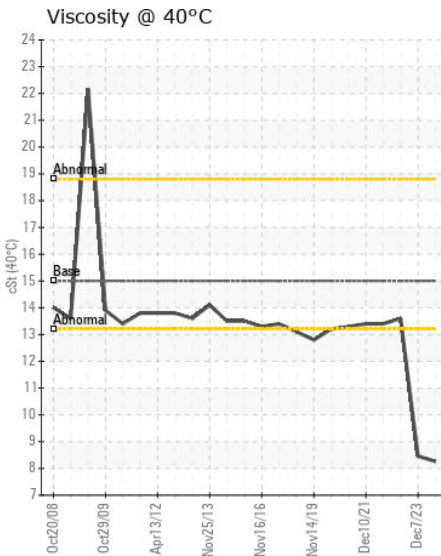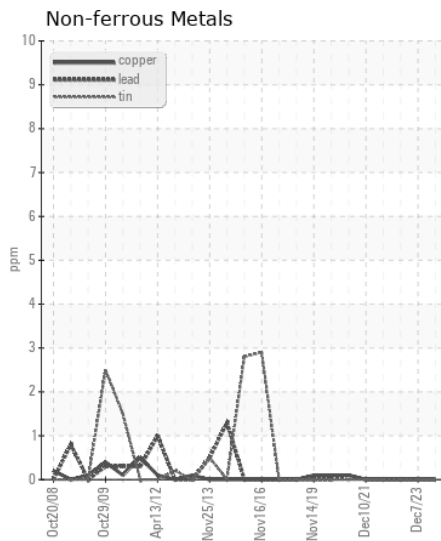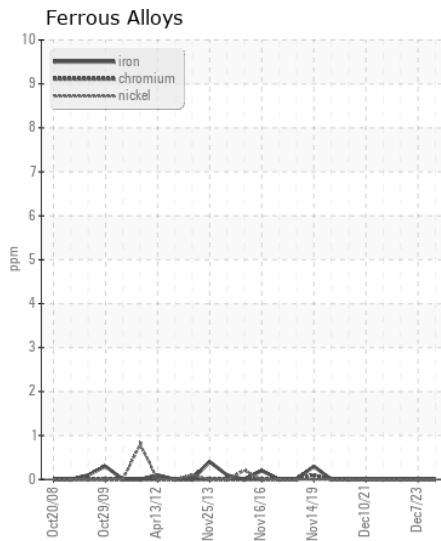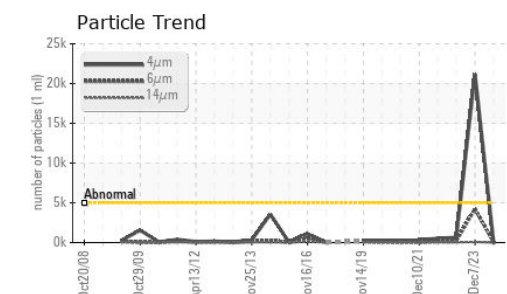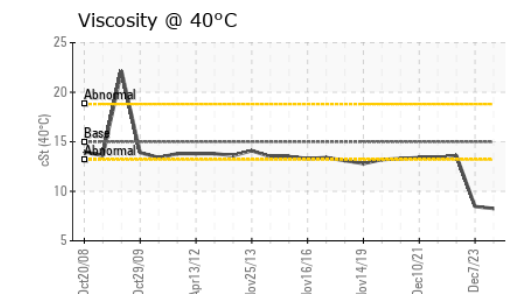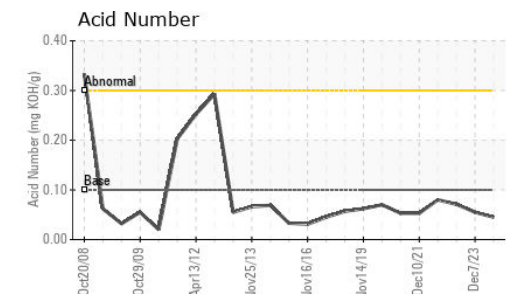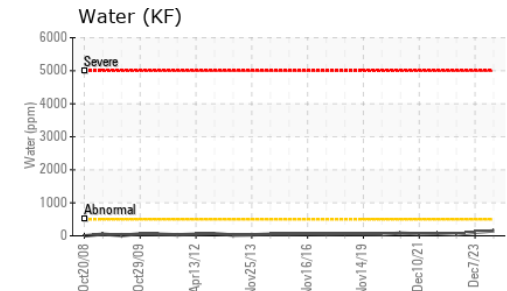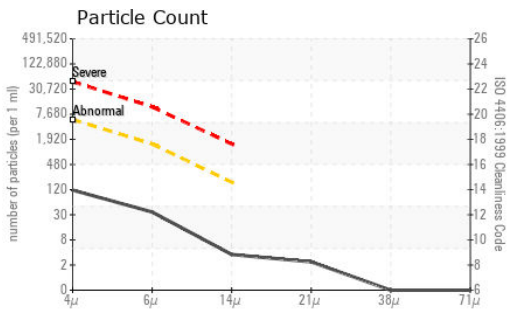

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : AN35267 **Received** : 17 Jun 2024
Lab Number : 06213050 **Tested** : 20 Jun 2024
Unique Number : 11085914 **Diagnosed** : 20 Jun 2024 - Jonathan Hester
Test Package : IND 2 (Additional Tests: PrtCount)

NABTESCO AEROSPACE INC
 12413 WILLOWS RD NE
 KIRKLAND, WA
 US 98034
 Contact: SCOTT JACKSON
 s.jackson@nabtescoaero.com
 T: (425)602-8432
 F: (425)602-8408

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)