



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 135G 1FF135GXCMF502498**

Component  
**Diesel Engine**

Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0213659</b>	JR0186971	JR0145352
Sample Date		Client Info		<b>17 Jun 2024</b>	01 Oct 2023	20 Apr 2023
Machine Age	hrs	Client Info		<b>2434</b>	1917	1428
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>7</b>	5	7
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>8</b>	5	2
Lead	ppm	ASTM D5185m	>26	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>26	<b>3</b>	6	8
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	<b>10</b>	9	11
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	9	7
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.9</b>	7.4	7.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.3</b>	20.6	19.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>1</b>	5	2
Boron	ppm	ASTM D5185m		<b>308</b>	325	263
Barium	ppm	ASTM D5185m		<b>2</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>301</b>	251	243
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m		<b>930</b>	840	755
Calcium	ppm	ASTM D5185m		<b>1660</b>	1559	1450
Phosphorus	ppm	ASTM D5185m		<b>1025</b>	919	882
Zinc	ppm	ASTM D5185m		<b>1247</b>	1111	1082
Sulfur	ppm	ASTM D5185m		<b>3731</b>	3075	3062
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.1</b>	14.3	14.6
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.5</b>	8.1	7.5
Visc @ 100°C	cSt	ASTM D445		<b>12.7</b>	12.7	12.7


**FT-IR (Direct Trend)**

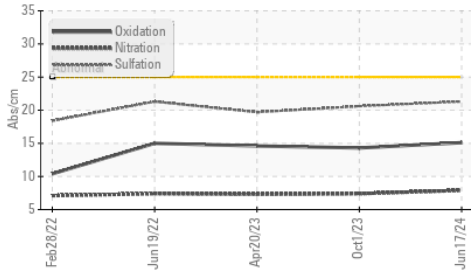


**Ferrous Alloys**

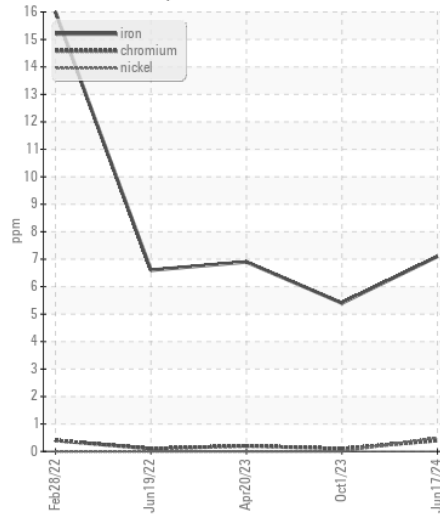


**Base Number**

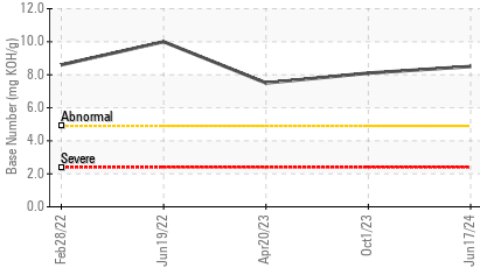


**Non-ferrous Metals**

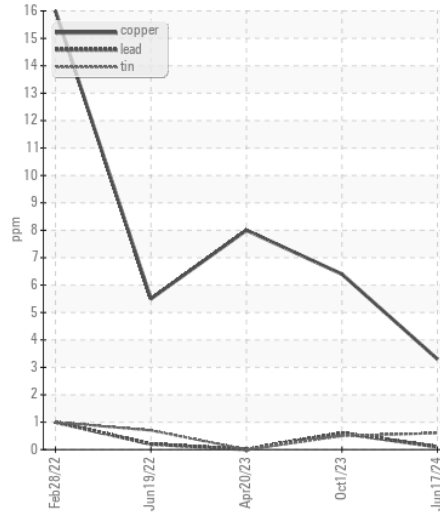


**Viscosity @ 100°C**

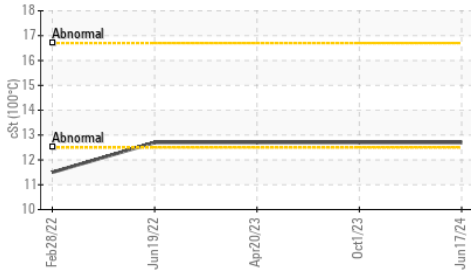

**Viscosity @ 100°C**

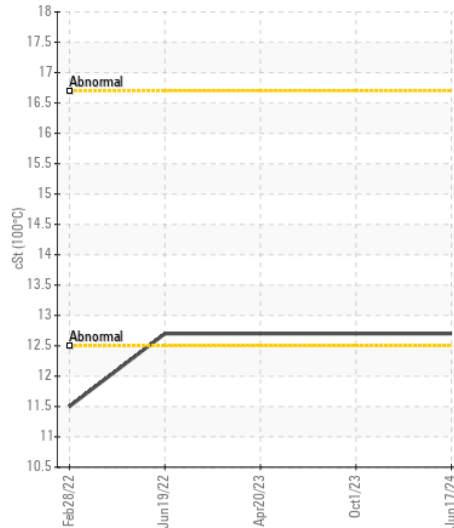

**Base Number**

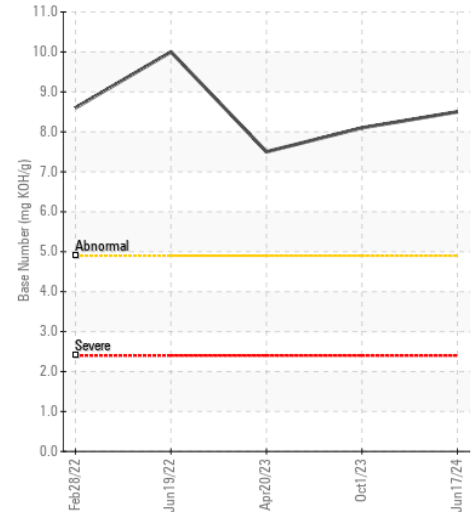

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0213659 **Received** : 18 Jun 2024  
**Lab Number** : 06213093 **Tested** : 19 Jun 2024  
**Unique Number** : 11085957 **Diagnosed** : 19 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**JRE - GREENSBORO**  
 411 SOUTH REGIONAL ROAD  
 GREENSBORO, NC  
 US 27409  
 Contact: NICK GALLAHER  
 NGALLAHER@JRENET.COM  
 T: (336)668-2762  
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)