



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO A30G 753658**  
Component  
**Diesel Engine**  
Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011236	---	---
Sample Date		Client Info		13 Jun 2024	---	---
Machine Age	hrs	Client Info		813	---	---
Oil Age	hrs	Client Info		813	---	---
Filter Age	hrs	Client Info		813	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

### WEAR

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	26	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>2	1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>2	2	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	▲ 380	---	---
Tin	ppm	ASTM D5185m	>15	3	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION










Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	33	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Fuel	%	ASTM D3524	>6.0	0.4	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.4	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.9	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		34	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		81	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m		91	---	---
Calcium	ppm	ASTM D5185m		2140	---	---
Phosphorus	ppm	ASTM D5185m		993	---	---
Zinc	ppm	ASTM D5185m		1206	---	---
Sulfur	ppm	ASTM D5185m		3918	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.3	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.9	---	---
Visc @ 100°C	cSt	ASTM D445		11.1	---	---

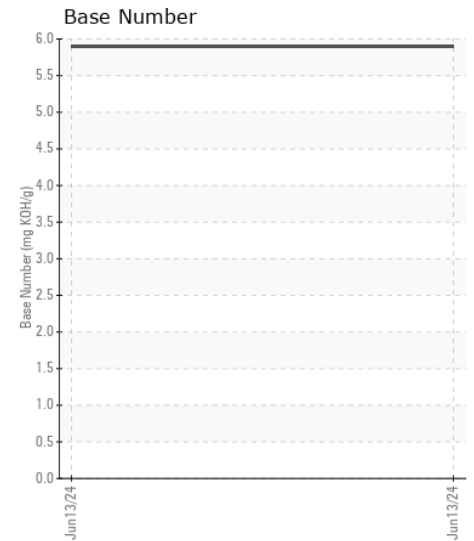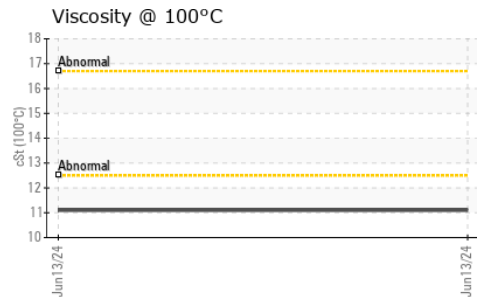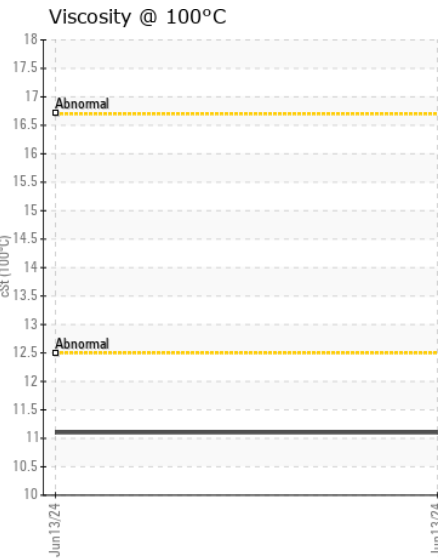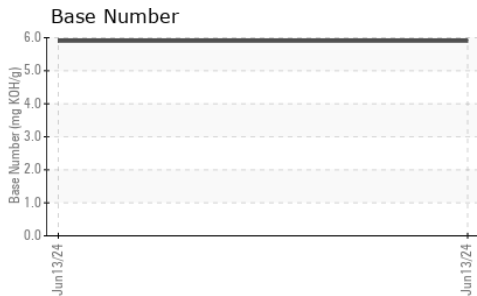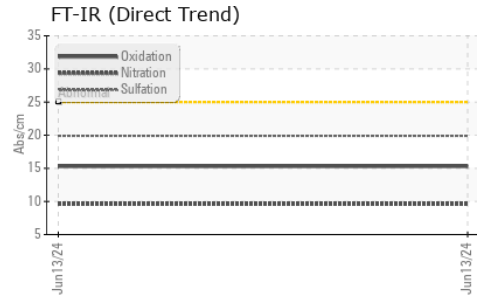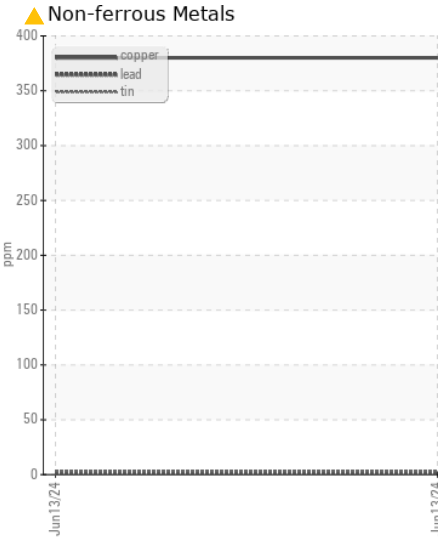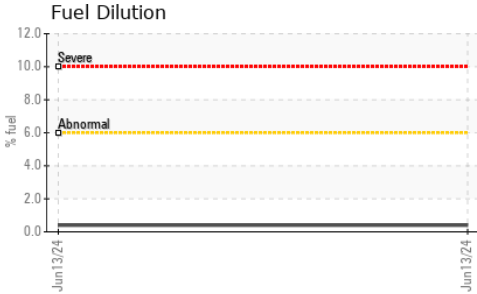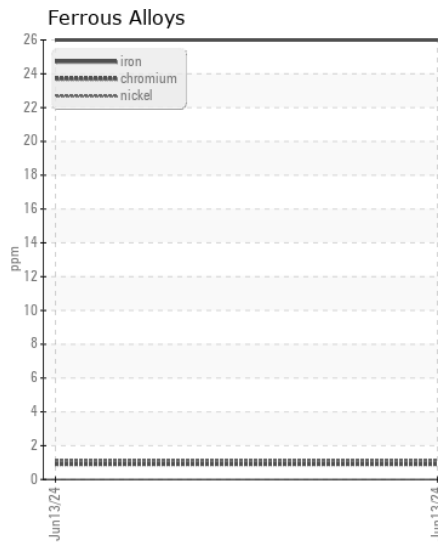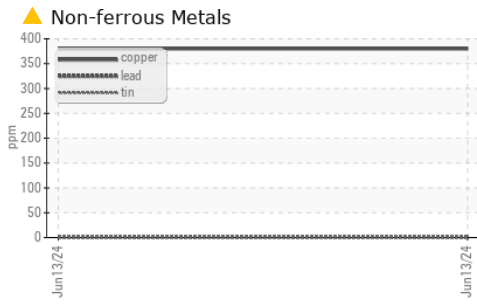

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0011236 **Received** : 18 Jun 2024  
**Lab Number** : **06213121** **Tested** : 20 Jun 2024  
**Unique Number** : 11085985 **Diagnosed** : 20 Jun 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: FuelDilution, PercentFuel, TBN )

**CARDINAL CIVIL**  
 4700 FALLS OF NEUSE RD, SUITE 370  
 RALEIGH, NC  
 US 27609  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)324-1964

F: