



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PACCAR 8464492
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0021028	RPL0011343	RPL0006276
Sample Date		Client Info		05 Jun 2024	12 Sep 2023	12 Sep 2022
Machine Age	mls	Client Info		113163	95863	67094
Oil Age	mls	Client Info		113163	95863	27607
Filter Age	mls	Client Info		0	95863	27607
Oil Changed		Client Info		Not Chngd	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	90	77	41
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	15	18	11
Lead	ppm	ASTM D5185m	>40	4	4	3
Copper	ppm	ASTM D5185m	>330	9	8	6
Tin	ppm	ASTM D5185m	>15	2	2	1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	14	14	6
Potassium	ppm	ASTM D5185m	>20	28	29	17
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.4	1.3	0.9
Nitration	Abs/cm	*ASTM D7624	>20	13.9	13.0	12.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	29.1	27.7	26.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	4	3
Boron	ppm	ASTM D5185m	0	30	27	25
Barium	ppm	ASTM D5185m	0	<1	0	0
Molybdenum	ppm	ASTM D5185m	0	37	39	30
Manganese	ppm	ASTM D5185m		1	1	<1
Magnesium	ppm	ASTM D5185m	0	597	583	529
Calcium	ppm	ASTM D5185m		1659	1743	1562
Phosphorus	ppm	ASTM D5185m		773	822	715
Zinc	ppm	ASTM D5185m		983	1009	882
Sulfur	ppm	ASTM D5185m		2702	2864	3003
Oxidation	Abs/.1mm	*ASTM D7414	>25	29.0	27.4	25.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	5.7	5.8	7.7
Visc @ 100°C	cSt	ASTM D445	14	15.2	15.0	14.5

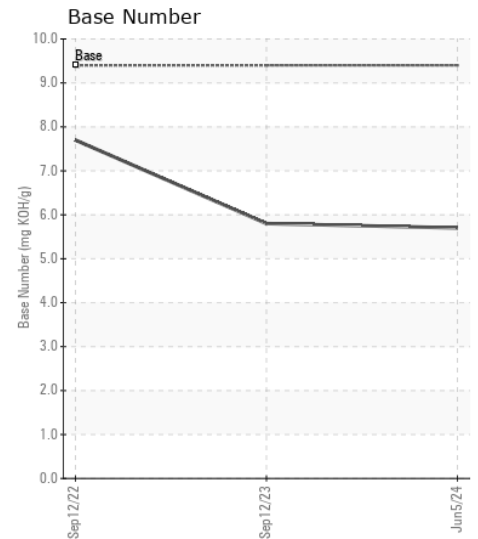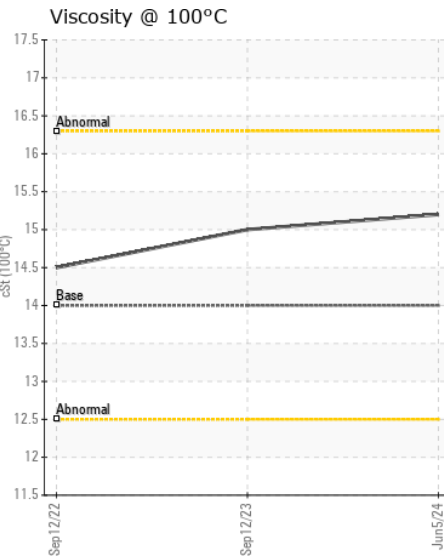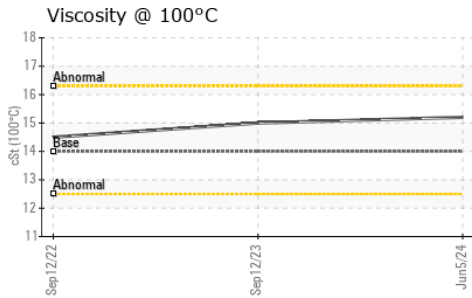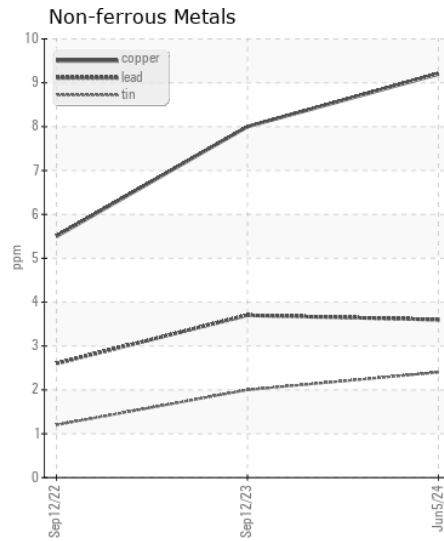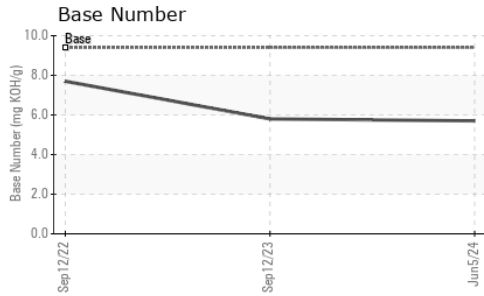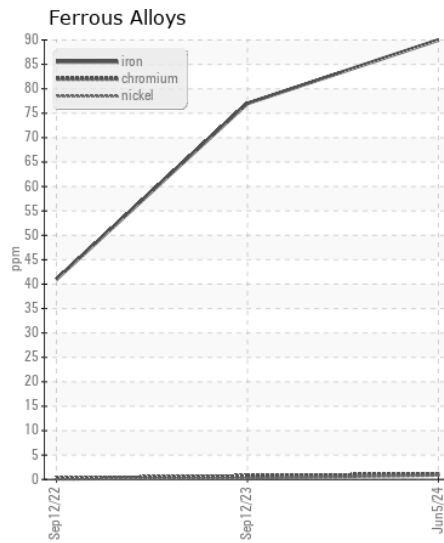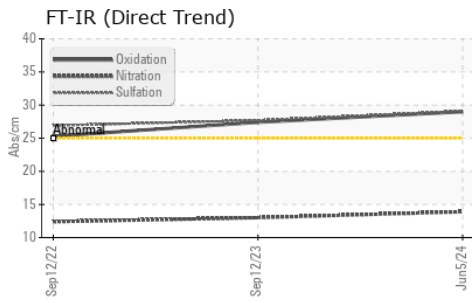

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0021028
Lab Number : 06213149
Unique Number : 11086013
Test Package : FLEET

RTL PACLEASE - 7006 - Pico Rivera
 7837 Telegraph Rd
 Pico Rivera, CA
 US 90660
 Contact: GERARDO CARROLA
 carrolag@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: