



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	ABNORMAL

Machine Id
PETERBILT 8464393
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER 15W40 (16 QTS)

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0021042	RPL0017931	RPL0016849
Sample Date		Client Info		10 Jun 2024	01 Mar 2024	19 Dec 2023
Machine Age	mls	Client Info		118694	109490	104870
Oil Age	mls	Client Info		9204	8083	3069
Filter Age	mls	Client Info		9204	8083	3069
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				SEVERE	SEVERE	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	19	33	13
Chromium	ppm	ASTM D5185m	>20	0	<1	0
Nickel	ppm	ASTM D5185m	>2	0	<1	0
Titanium	ppm	ASTM D5185m	>2	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	12	▲ 24	8
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	13	2	<1
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185m	>25	4	5	3
Potassium	ppm	ASTM D5185m	>20	16	32	5
Fuel	%	ASTM D3524	>3.0	▲ 7.1	▲ 6.2	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>6	0.1	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.0	7.8	5.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.0	21.5	17.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m		1	<1	0
Boron	ppm	ASTM D5185m	0	2	2	4
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	61	59	57
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	0	1042	865	930
Calcium	ppm	ASTM D5185m		1188	997	995
Phosphorus	ppm	ASTM D5185m		1086	913	1062
Zinc	ppm	ASTM D5185m		1333	1137	1210
Sulfur	ppm	ASTM D5185m		3693	2819	3036
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.9	21.8	14.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	6.2	7.2	9.4
Visc @ 100°C	cSt	ASTM D445	14	▲ 10.8	▲ 11.2	13.6

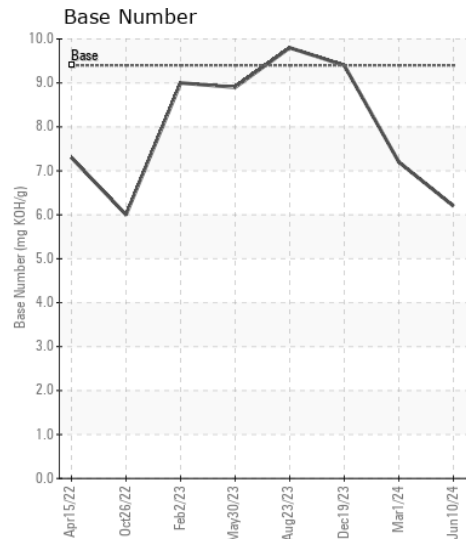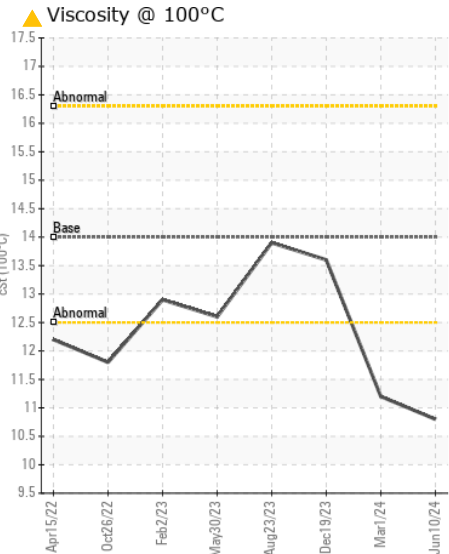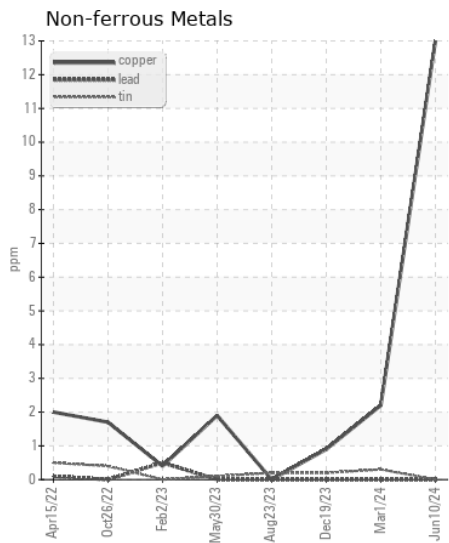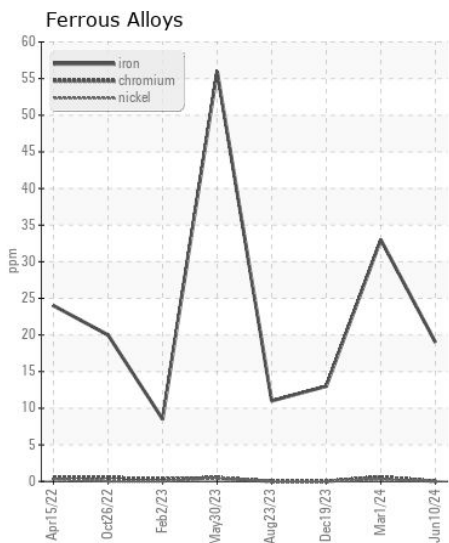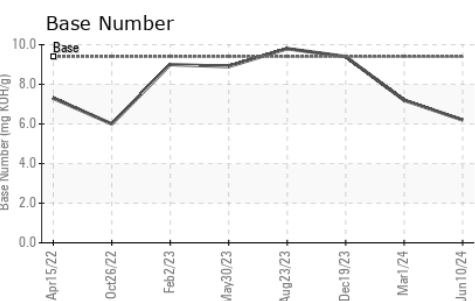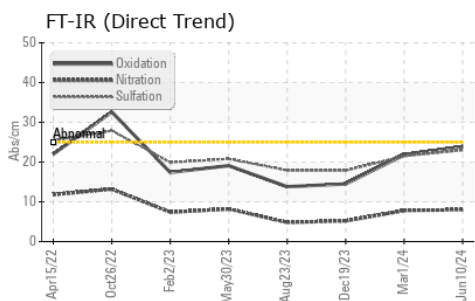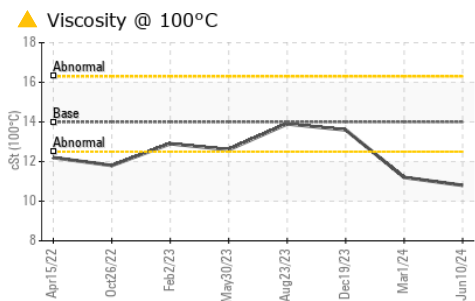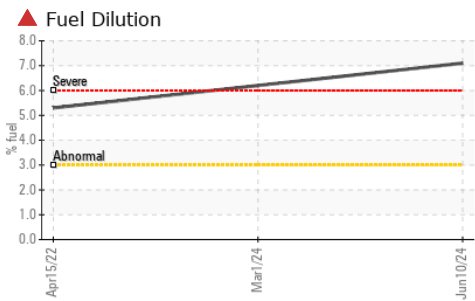

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0021042 **Received** : 18 Jun 2024
Lab Number : 06213175 **Tested** : 20 Jun 2024
Unique Number : 11086039 **Diagnosed** : 20 Jun 2024 - Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

RTL PACLEASE - 7006 - Pico Rivera
 7837 Telegraph Rd
 Pico Rivera, CA
 US 90660
 Contact: GERARDO CARROLA
 carrolag@rushenterprises.com

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)