



OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
813460
 Component
Diesel Engine
 Fluid
MOBIL DELVAC EXTREME 15W40 (44 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|----------|
| Sample Number | | Client Info | | RPL0002960 | RPL0008080 | --- |
| Sample Date | | Client Info | | 10 Jun 2024 | 09 Oct 2023 | --- |
| Machine Age | hrs | Client Info | | 12357 | 285559 | --- |
| Oil Age | hrs | Client Info | | 182 | 8968 | --- |
| Filter Age | hrs | Client Info | | 182 | 8968 | --- |
| Oil Changed | | Client Info | | Not Changd | Not Changd | --- |
| Filter Changed | | Client Info | | Not Changd | Not Changd | --- |
| Sample Status | | | | NORMAL | NORMAL | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|-----|
| Iron | ppm | ASTM D5185m | >100 | 54 | 11 | --- |
| Chromium | ppm | ASTM D5185m | >20 | <1 | <1 | --- |
| Nickel | ppm | ASTM D5185m | >4 | 0 | <1 | --- |
| Titanium | ppm | ASTM D5185m | | 0 | <1 | --- |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | --- |
| Aluminum | ppm | ASTM D5185m | >20 | 6 | 5 | --- |
| Lead | ppm | ASTM D5185m | >40 | 0 | <1 | --- |
| Copper | ppm | ASTM D5185m | >330 | 0 | <1 | --- |
| Tin | ppm | ASTM D5185m | >15 | 0 | <1 | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | <1 | --- |
| White Metal | scalar | *Visual | NONE | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | --- |

CONTAMINATION








There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-----|
| Silicon | ppm | ASTM D5185m | >25 | 5 | 8 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 8 | 2 | --- |
| Fuel | | WC Method | >5 | <1.0 | <1.0 | --- |
| Water | | WC Method | >0.2 | NEG | NEG | --- |
| Glycol | | WC Method | | NEG | NEG | --- |
| Soot % | % | *ASTM D7844 | >3 | 0.4 | 0.4 | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 8.1 | 9.9 | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 19.7 | 19.4 | --- |
| Silt | scalar | *Visual | NONE | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | --- |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|-----|
| Sodium | ppm | ASTM D5185m | | 1 | 3 | --- |
| Boron | ppm | ASTM D5185m | | 3 | 45 | --- |
| Barium | ppm | ASTM D5185m | | 0 | 0 | --- |
| Molybdenum | ppm | ASTM D5185m | | 69 | 100 | --- |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | --- |
| Magnesium | ppm | ASTM D5185m | | 1016 | 721 | --- |
| Calcium | ppm | ASTM D5185m | | 1212 | 1280 | --- |
| Phosphorus | ppm | ASTM D5185m | | 1071 | 802 | --- |
| Zinc | ppm | ASTM D5185m | | 1308 | 957 | --- |
| Sulfur | ppm | ASTM D5185m | | 3983 | 2974 | --- |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 15.7 | 16.7 | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 10.3 | 8.7 | 7.8 | --- |
| Visc @ 100°C | cSt | ASTM D445 | 14.3 | 13.0 | 13.5 | --- |

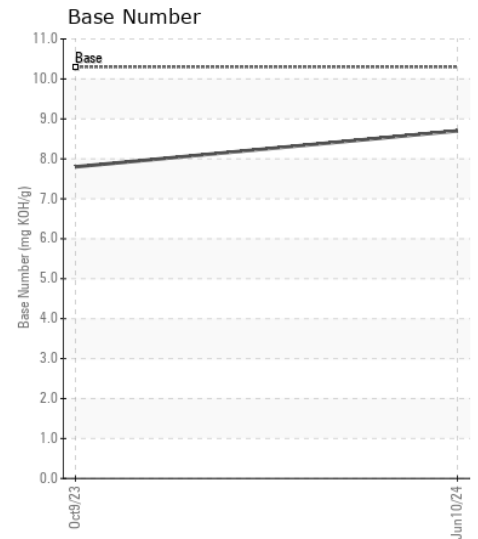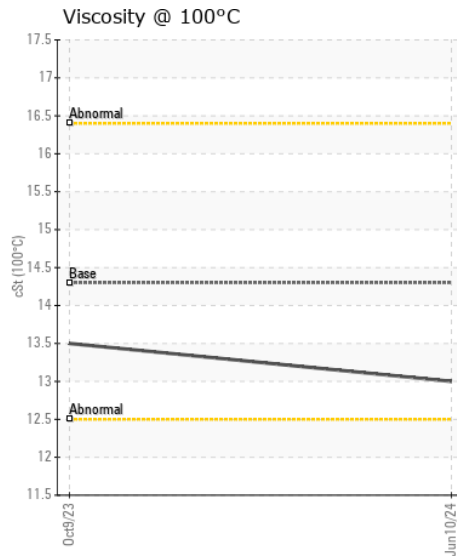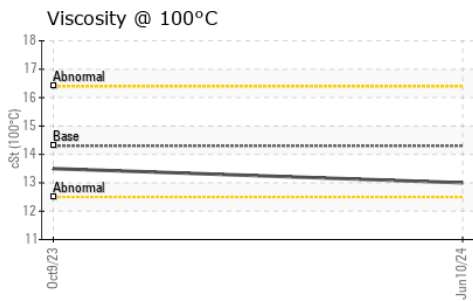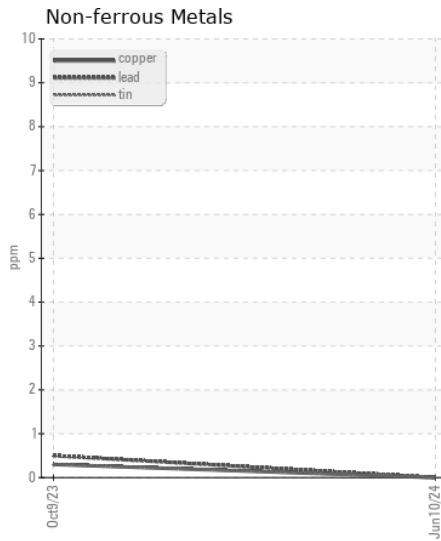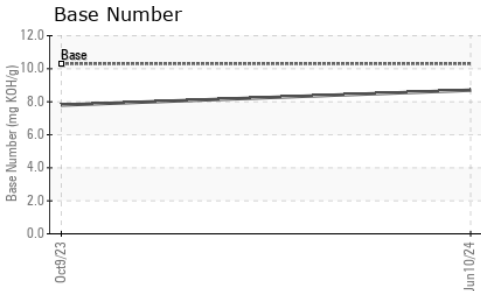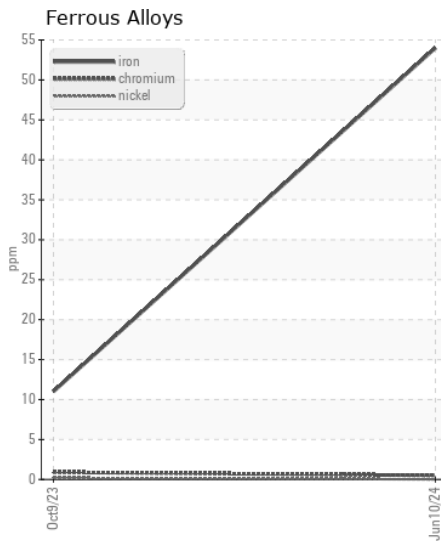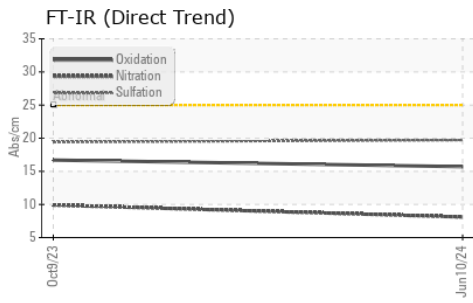

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0002960
Lab Number : 06213207
Unique Number : 11086071
Test Package : FLEET

Received : 18 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 19 Jun 2024 - Wes Davis

RTL PACLEASE - 7017 - Oklahoma City
 8700 West I-40
 Oklahoma City, OK
 US 73128
 Contact: TECHNICIAN ACCOUNT
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: