



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PIERCE 0077
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 XLE 15W40 (33 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0921197	WC0804020	WC0708762
Sample Date		Client Info		17 Jun 2024	11 May 2023	23 Aug 2022
Machine Age	hrs	Client Info		8112	7288	6544
Oil Age	hrs	Client Info		1112	288	654
Filter Age	hrs	Client Info		1112	288	654
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>65	29	8	21
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>3	0	<1	<1
Titanium	ppm	ASTM D5185m	>5	2	<1	2
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>35	11	4	12
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>180	4	3	10
Tin	ppm	ASTM D5185m	>8	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>15	6	5	4
Potassium	ppm	ASTM D5185m	>20	4	2	6
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.4	0.5	1
Nitration	Abs/cm	*ASTM D7624	>20	11.3	8.2	11.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.1	19.7	25.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	2	12
Boron	ppm	ASTM D5185m		13	30	21
Barium	ppm	ASTM D5185m		0	0	<1
Molybdenum	ppm	ASTM D5185m		70	76	62
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		488	424	297
Calcium	ppm	ASTM D5185m		2094	1792	1770
Phosphorus	ppm	ASTM D5185m	760	1028	1047	900
Zinc	ppm	ASTM D5185m	830	1307	1277	1170
Sulfur	ppm	ASTM D5185m	2770	3973	4376	3121
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.5	14.3	19.1
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	5.5	7.6	6.4
Visc @ 100°C	cSt	ASTM D445	14.9	14.8	14.2	14.5


FT-IR (Direct Trend)

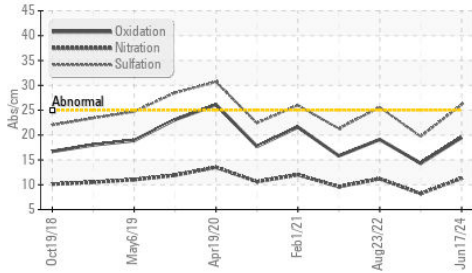


Ferrous Alloys

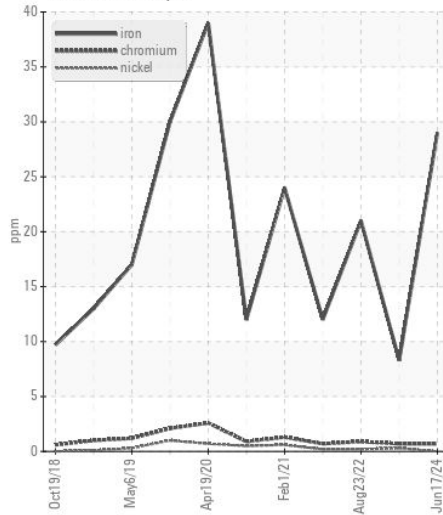


Base Number

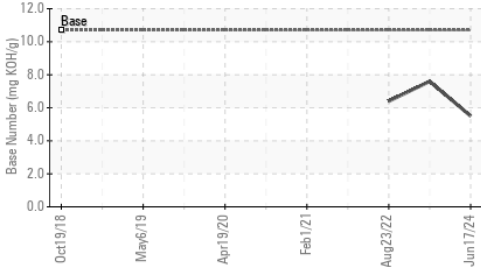


Viscosity @ 100°C

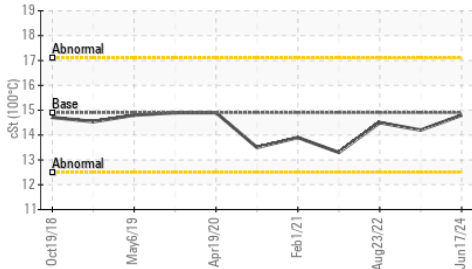


Non-ferrous Metals

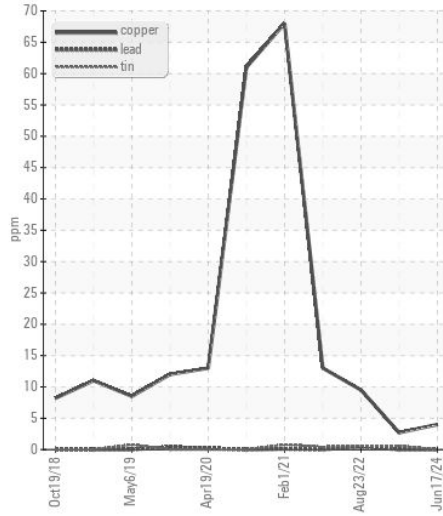

Viscosity @ 100°C

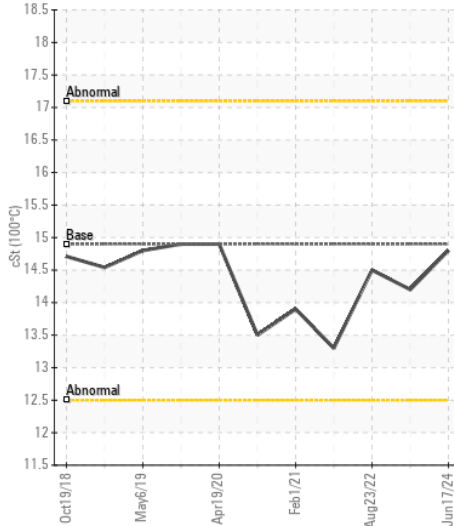

Base Number

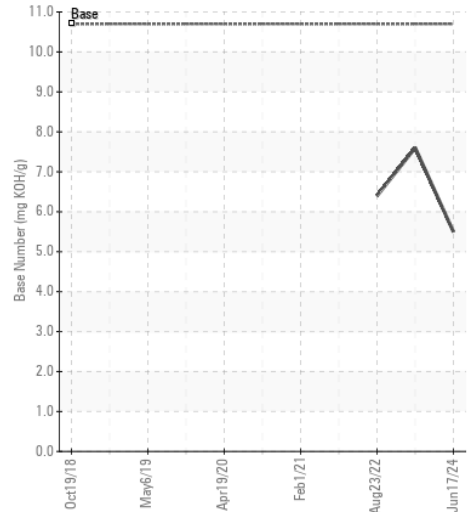

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0921197 **Received** : 18 Jun 2024
Lab Number : 06213216 **Tested** : 19 Jun 2024
Unique Number : 11086080 **Diagnosed** : 20 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

TOWN OF CARY
 420 JAMES JACKSON AVENUE
 CARY, NC
 US 27513
 Contact: BRANDON PASINSKI
 brandon.pasinski@carync.gov
 T: (919)469-4098
 F: (919)380-6420

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)