



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
9912
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0887552	WC0887578	WC0845009
Sample Date		Client Info		03 Jun 2024	12 Feb 2024	22 Sep 2023
Machine Age	mls	Client Info		365880	360394	354937
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	47	24	45
Chromium	ppm	ASTM D5185m	>20	6	2	9
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		1	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	4	3
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	<1	2	3
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	7	8	8
Potassium	ppm	ASTM D5185m	>20	0	2	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	2.3	1.8	▲ 3.5
Nitration	Abs/cm	*ASTM D7624	>20	9.9	10.1	12.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.0	23.6	27.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	11	8	4
Boron	ppm	ASTM D5185m	250	63	71	10
Barium	ppm	ASTM D5185m	10	0	10	0
Molybdenum	ppm	ASTM D5185m	100	73	77	75
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	450	387	215	343
Calcium	ppm	ASTM D5185m	3000	1857	1593	1756
Phosphorus	ppm	ASTM D5185m	1150	1051	928	999
Zinc	ppm	ASTM D5185m	1350	1266	1100	1271
Sulfur	ppm	ASTM D5185m	4250	3830	3384	3251
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.4	16.7	18.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.0	5.4	5.8
Visc @ 100°C	cSt	ASTM D445	14.4	14.9	13.9	15.4


FT-IR (Direct Trend)

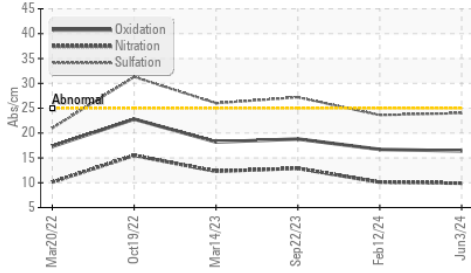


Ferrous Alloys

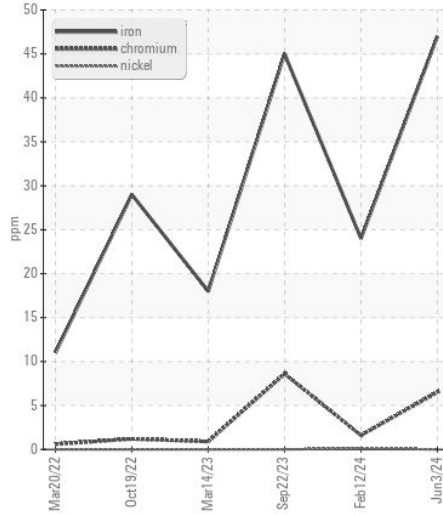


Base Number

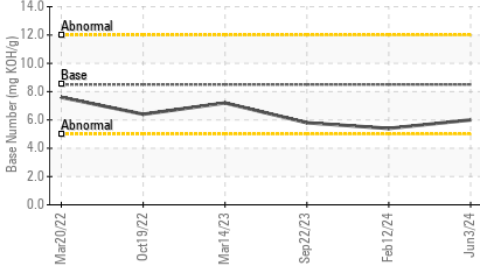


Non-ferrous Metals

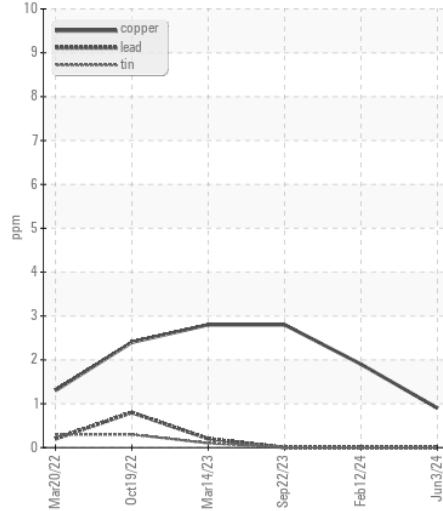


Viscosity @ 100°C

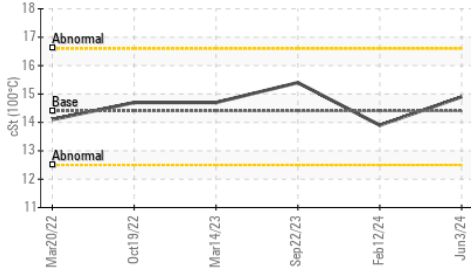

Viscosity @ 100°C

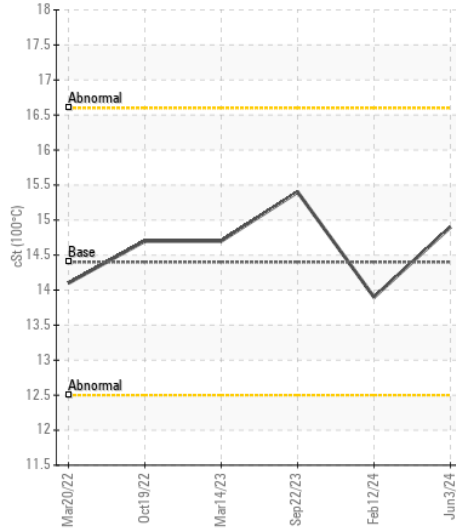

Base Number

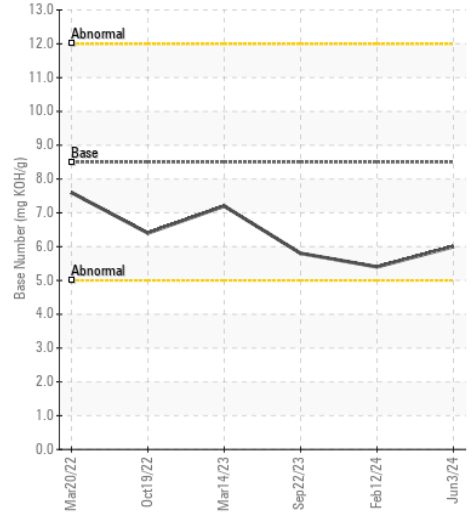

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0887552

Lab Number : 06213232

Unique Number : 11086096

Test Package : FLEET

Received : 18 Jun 2024

Tested : 19 Jun 2024

Diagnosed : 19 Jun 2024 - Wes Davis

TOWN OF CHAPEL HILL

6900 MILLHOUSE RD

CHAPEL HILL, NC

US 27516

Contact: Lisa DePasqua

ldepasqua@townofchapelhill.org

T: (919)696-4941

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)