



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**228032-208**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0119274</b>	GFL0070943	GFL0058064
Sample Date		Client Info		<b>17 Jun 2024</b>	04 Apr 2024	03 Jan 2024
Machine Age	hrs	Client Info		<b>1005</b>	941	822
Oil Age	hrs	Client Info		<b>183</b>	119	1
Filter Age	hrs	Client Info		<b>183</b>	119	1
Oil Changed		Client Info		<b>Changed</b>	Not Changd	N/A
Filter Changed		Client Info		<b>Changed</b>	Not Changd	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>21</b>	21	13
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	4	2
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	1	3
Copper	ppm	ASTM D5185m	>330	<b>2</b>	2	10
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>12</b>	11	7
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	3	11
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>1</b>	0.8	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.7</b>	8.7	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.9</b>	20.3	19.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>4</b>	8	12
Boron	ppm	ASTM D5185m	0	<b>8</b>	6	8
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>64</b>	67	66
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>997</b>	991	992
Calcium	ppm	ASTM D5185m	1070	<b>1159</b>	1125	1142
Phosphorus	ppm	ASTM D5185m	1150	<b>1151</b>	1028	1091
Zinc	ppm	ASTM D5185m	1270	<b>1351</b>	1272	1314
Sulfur	ppm	ASTM D5185m	2060	<b>3647</b>	2983	3260
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.5</b>	16.9	15.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.9</b>	8.8	8.8
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	14.2	14.3


**FT-IR (Direct Trend)**

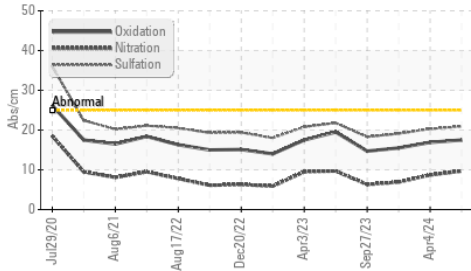


**Ferrous Alloys**

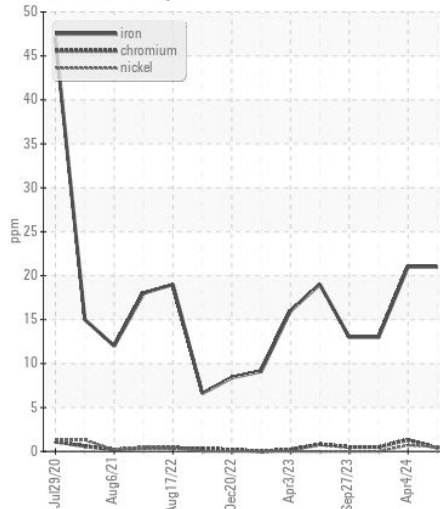


**Base Number**

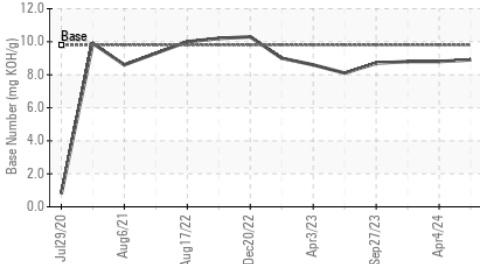


**Non-ferrous Metals**

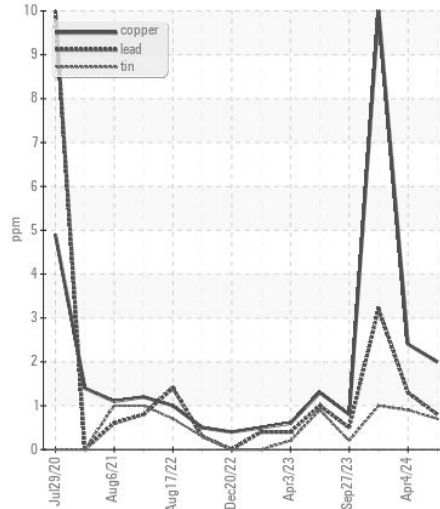


**Viscosity @ 100°C**

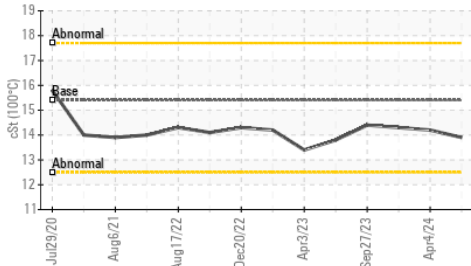

**Viscosity @ 100°C**

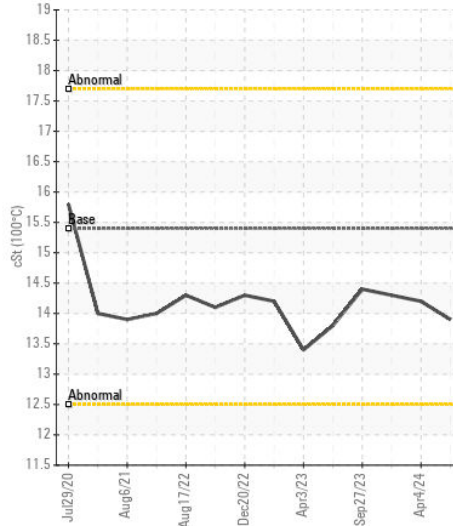

**Base Number**

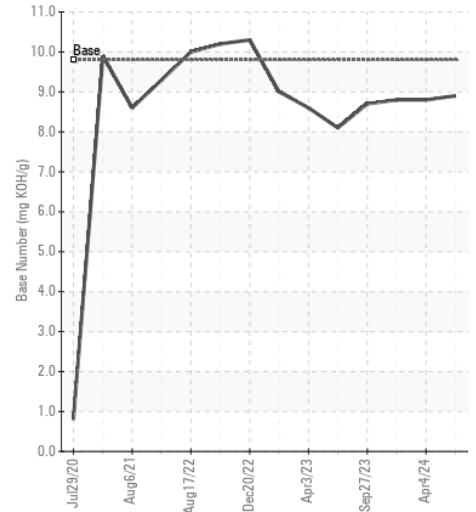

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0119274  
**Lab Number** : 06213283  
**Unique Number** : 11086147  
**Test Package** : FLEET

**Received** : 18 Jun 2024  
**Tested** : 19 Jun 2024  
**Diagnosed** : 19 Jun 2024 - Wes Davis

**GFL Environmental - 657 - Charlottesville Hauling**  
 5498 Richmond Road  
 Troy, VA  
 US 22974  
 Contact: Brian Ulickas  
 bulickas@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: