



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 3 - Norton
Machine Id
JOHN DEERE 130P 1FF130PAVPF000096
Component
Hydraulic System
Fluid
HITACHI HYDRAULIC SUPER EX 46HN (49 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0050061	LEC0043091	---
Sample Date		Client Info		14 Jun 2024	11 Oct 2023	---
Machine Age	hrs	Client Info		301	251	---
Oil Age	hrs	Client Info		301	251	---
Filter Age	hrs	Client Info		301	251	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	17	12	---
Iron	ppm	ASTM D5185m	>32	3	2	---
Chromium	ppm	ASTM D5185m	>9	<1	0	---
Nickel	ppm	ASTM D5185m	>5	<1	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>9	2	0	---
Lead	ppm	ASTM D5185m	>28	<1	0	---
Copper	ppm	ASTM D5185m	>50	2	<1	---
Tin	ppm	ASTM D5185m	>5	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>11	1	0	---
Potassium	ppm	ASTM D5185m	>20	1	0	---
Water		WC Method	>0.075	NEG	NEG	---
Particles >4µm		ASTM D7647	>80000	1779	4139	---
Particles >6µm		ASTM D7647	>20000	346	989	---
Particles >14µm		ASTM D7647	>640	20	42	---
Particles >21µm		ASTM D7647	>160	4	8	---
Particles >38µm		ASTM D7647	>40	0	0	---
Particles >71µm		ASTM D7647	>10	0	0	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	18/16/11	19/17/13	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	0	<1	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		<1	2	---
Molybdenum	ppm	ASTM D5185m		<1	0	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m		<1	3	---
Calcium	ppm	ASTM D5185m		0	2	---
Phosphorus	ppm	ASTM D5185m	827	459	483	---
Zinc	ppm	ASTM D5185m	0	35	27	---
Sulfur	ppm	ASTM D5185m	13	71	120	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.13	0.136	---
Visc @ 40°C	cSt	ASTM D445	47	46.8	46.5	---

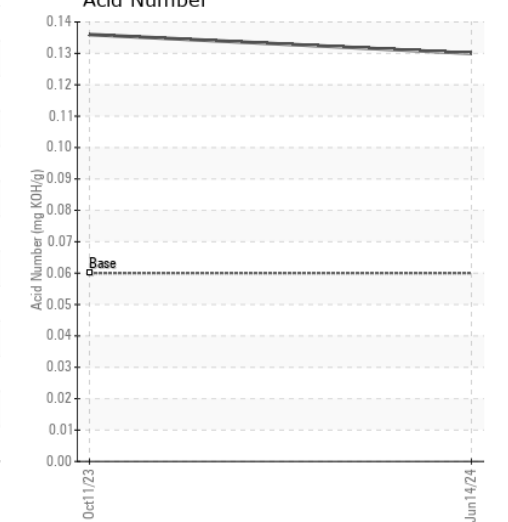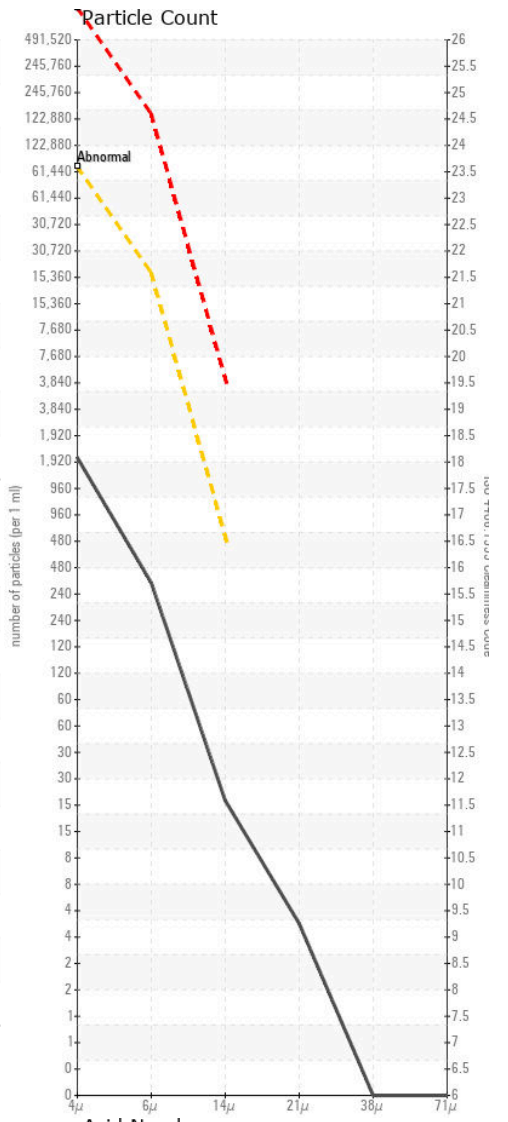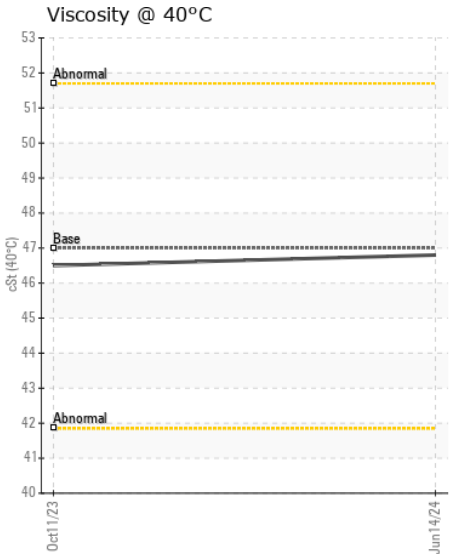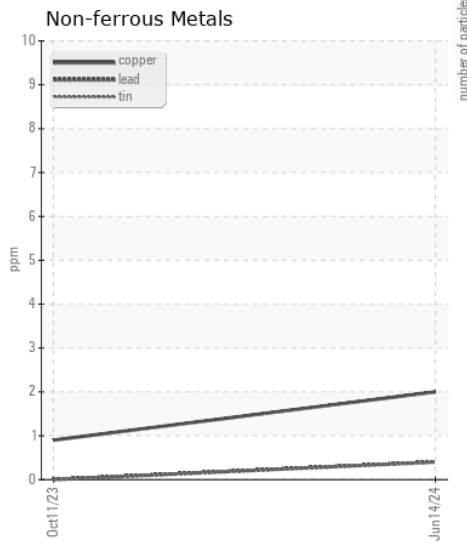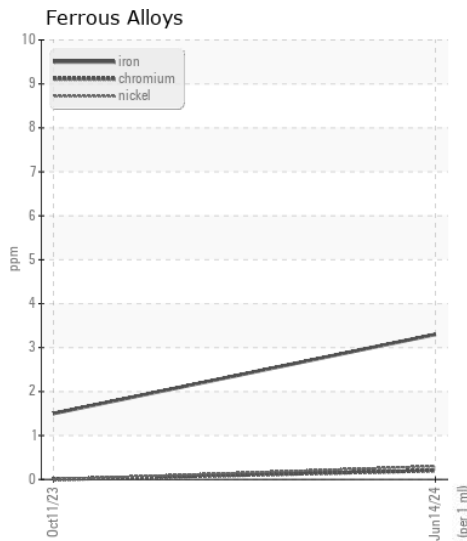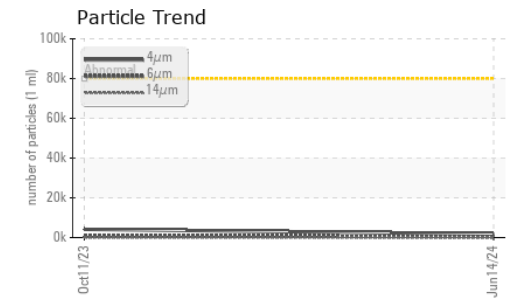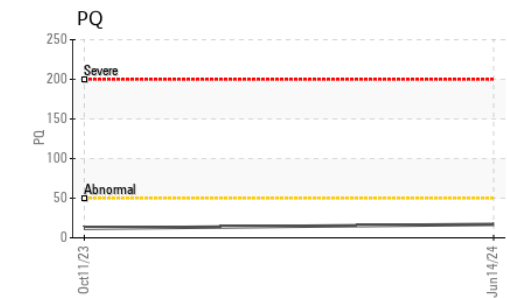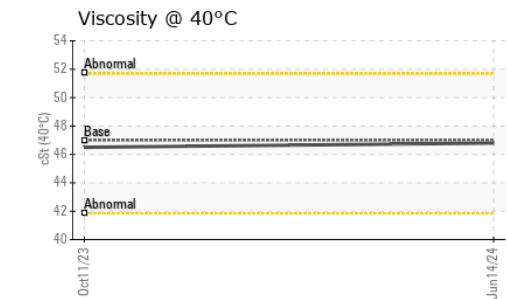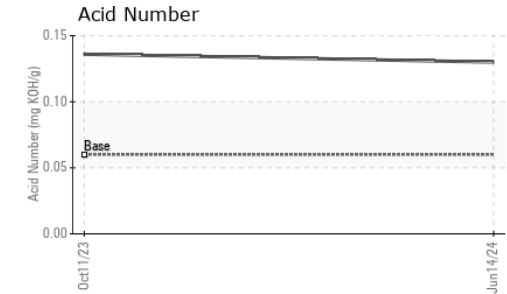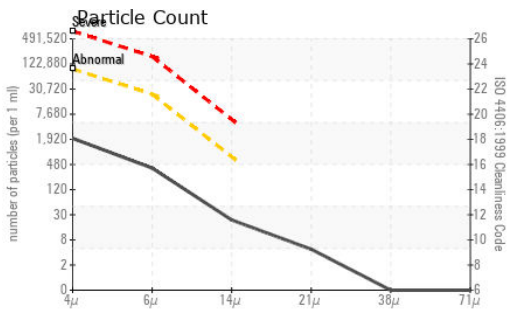

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0050061 **Received** : 18 Jun 2024
Lab Number : 06213348 **Tested** : 19 Jun 2024
Unique Number : 11086212 **Diagnosed** : 20 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)