



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[AFTER FILTRATION]

Machine Id
402205.01

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KL0014365	KL0014364	---
Sample Date		Client Info		03 Jun 2024	02 Jun 2024	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	4	4	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>20	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		<1	<1	---
Aluminum	ppm	ASTM D5185m	>20	2	2	---
Lead	ppm	ASTM D5185m	>20	<1	<1	---
Copper	ppm	ASTM D5185m	>20	2	2	---
Tin	ppm	ASTM D5185m	>20	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>15	9	▲ 17	---
Potassium	ppm	ASTM D5185m	>20	<1	1	---
Water		WC Method	>0.05	NEG	NEG	---
Particles >4µm		ASTM D7647		1896	4710	---
Particles >6µm		ASTM D7647	>1300	285	1131	---
Particles >14µm		ASTM D7647	>160	24	130	---
Particles >21µm		ASTM D7647	>40	7	41	---
Particles >38µm		ASTM D7647	>10	1	2	---
Particles >71µm		ASTM D7647	>3	0	1	---
Oil Cleanliness		ISO 4406 (c)	>17/14	15/12	17/14	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	0	---
Boron	ppm	ASTM D5185m	5	0	0	---
Barium	ppm	ASTM D5185m	5	0	<1	---
Molybdenum	ppm	ASTM D5185m	5	<1	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	25	47	48	---
Calcium	ppm	ASTM D5185m	200	10	10	---
Phosphorus	ppm	ASTM D5185m	300	235	251	---
Zinc	ppm	ASTM D5185m	370	309	319	---
Sulfur	ppm	ASTM D5185m	2500	1569	1709	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.32	0.28	---
Visc @ 40°C	cSt	ASTM D445	46	45.2	45.4	---

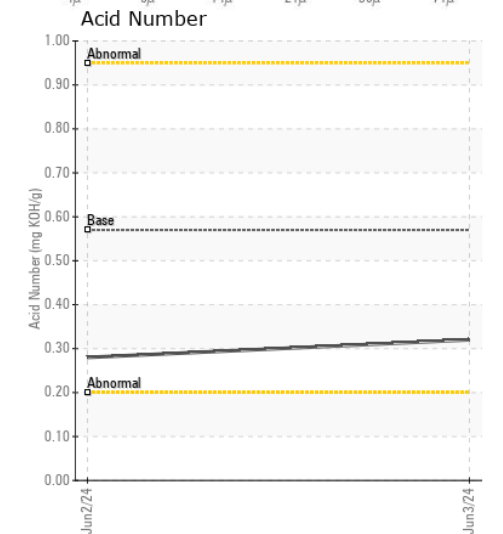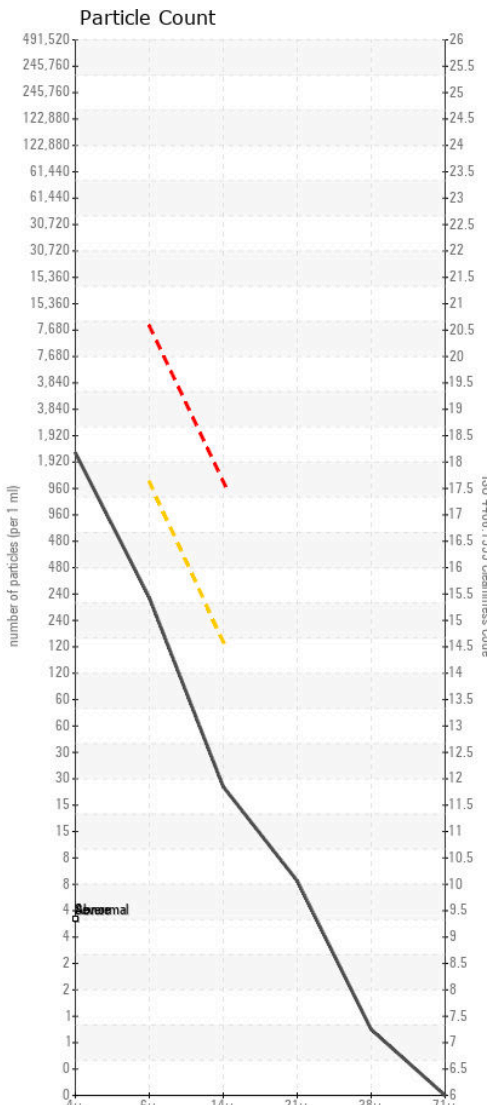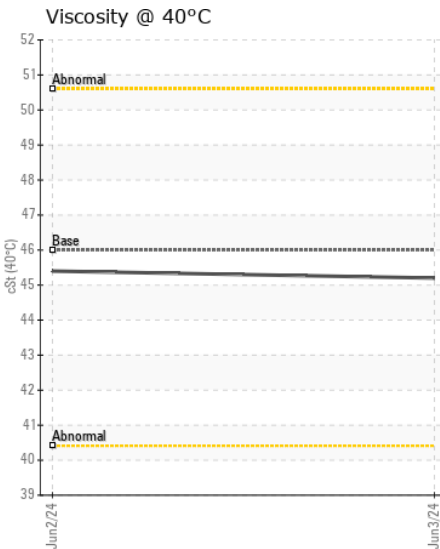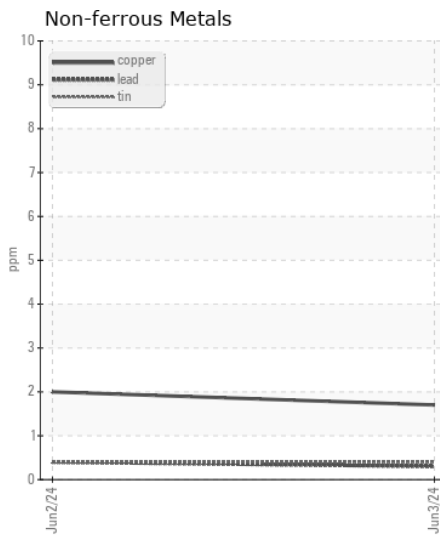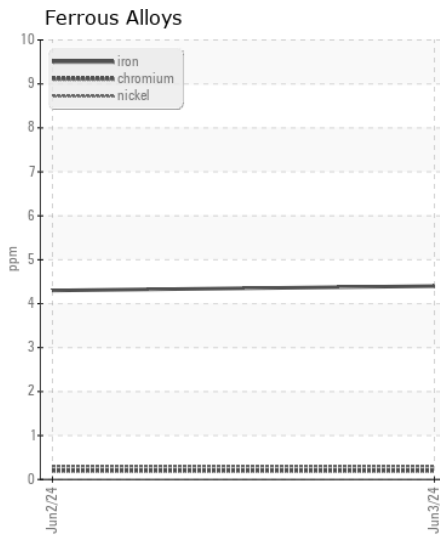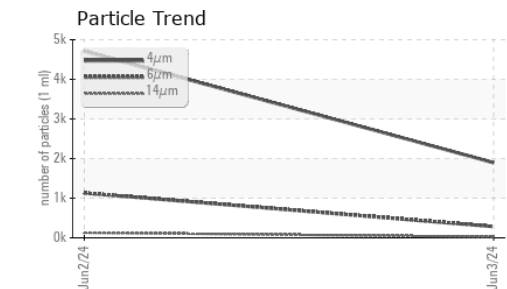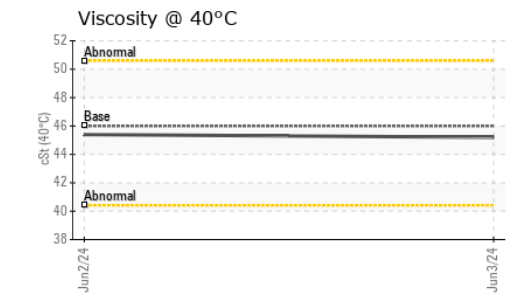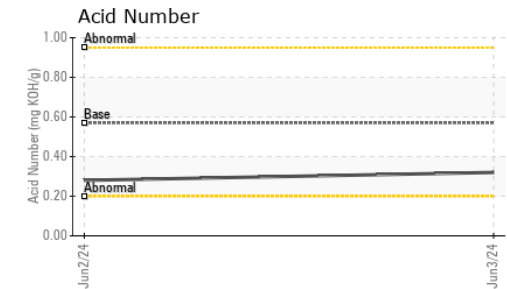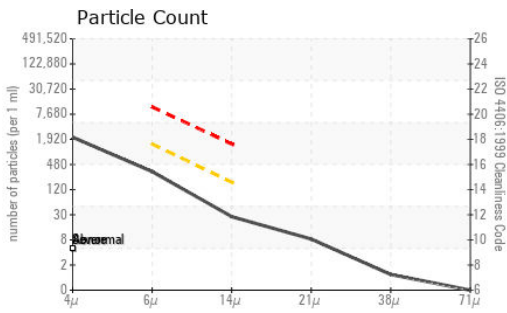

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : KL0014365

Lab Number : 06213425

Unique Number : 11086289

Test Package : MOB 2

Received : 18 Jun 2024

Tested : 19 Jun 2024

Diagnosed : 19 Jun 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

PV FLUID PRODUCTS

11901 CUTTEN RD

HOUSTON, TX

US 77066

Contact: PAT HARRAH

PAT.HARRAH@PVFLUID.COM

T: (281)620-2085

F: