



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W52399]

Machine Id
JOHN DEERE 1DW624PAJMLT10737

Component
Transmission (Manual)

Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0211781	JR0147081	---
Sample Date		Client Info		11 Jun 2024	18 Jan 2023	---
Machine Age	hrs	Client Info		1940	956	---
Oil Age	hrs	Client Info		0	956	---
Filter Age	hrs	Client Info		0	956	---
Oil Changed		Client Info		Changed	Not Changed	---
Filter Changed		Client Info		Changed	Not Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	16	15	---
Iron	ppm	ASTM D5185m	>200	22	19	---
Chromium	ppm	ASTM D5185m	>5	0	<1	---
Nickel	ppm	ASTM D5185m	>5	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>7	0	<1	---
Aluminum	ppm	ASTM D5185m	>25	<1	<1	---
Lead	ppm	ASTM D5185m	>45	0	<1	---
Copper	ppm	ASTM D5185m	>225	8	5	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	13	15	---
Potassium	ppm	ASTM D5185m	>20	0	0	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		25	25	---
Boron	ppm	ASTM D5185m	6	3	3	---
Barium	ppm	ASTM D5185m	0	<1	11	---
Molybdenum	ppm	ASTM D5185m	0	0	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	145	81	83	---
Calcium	ppm	ASTM D5185m	3570	3075	2960	---
Phosphorus	ppm	ASTM D5185m	1290	976	917	---
Zinc	ppm	ASTM D5185m	1640	1087	1108	---
Sulfur	ppm	ASTM D5185m		3647	3611	---
Visc @ 40°C	cSt	ASTM D445	57.0	42.7	43.4	---

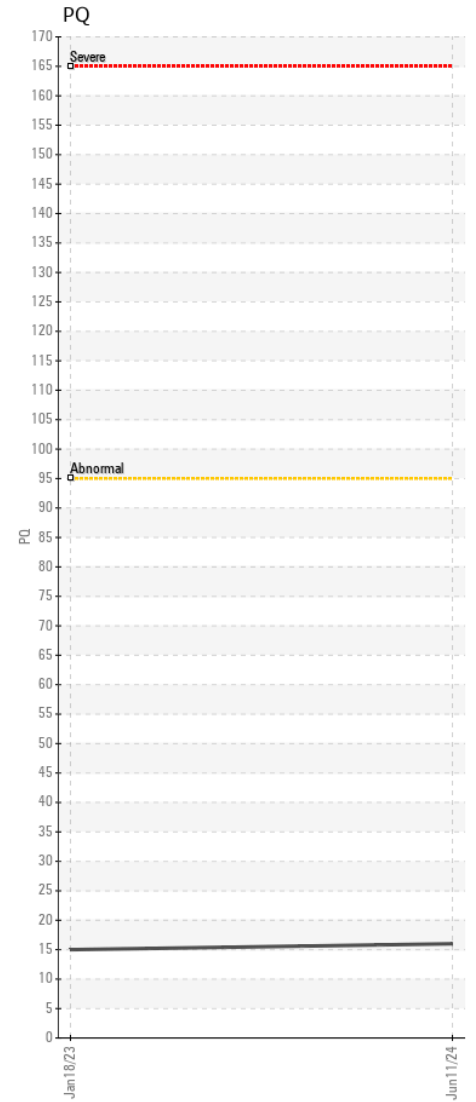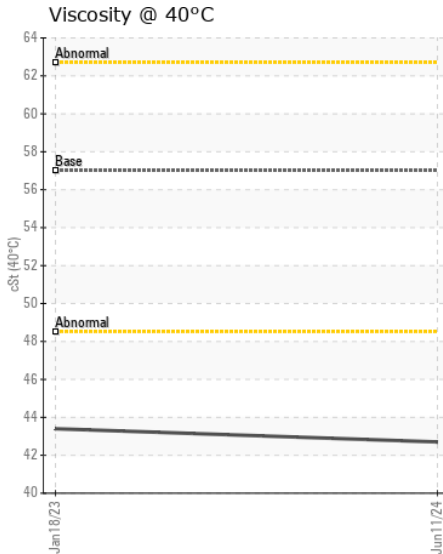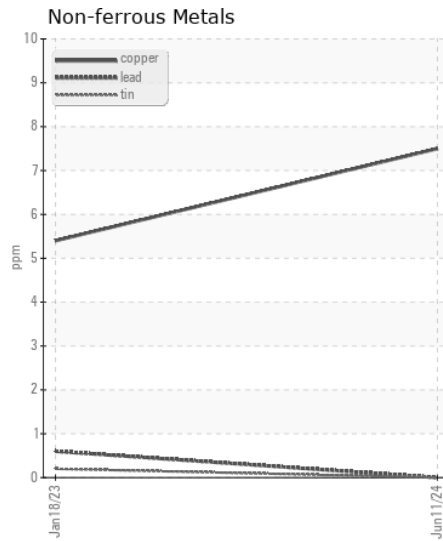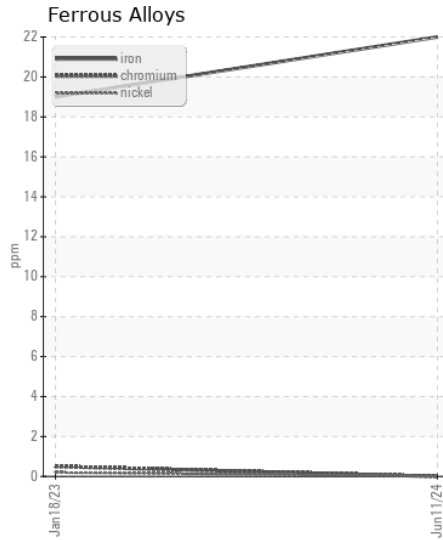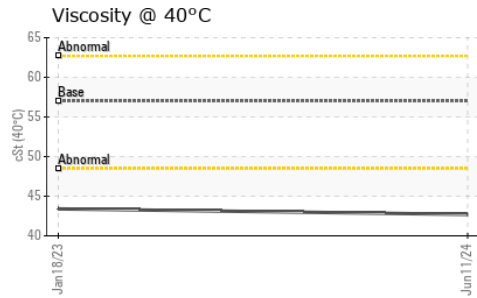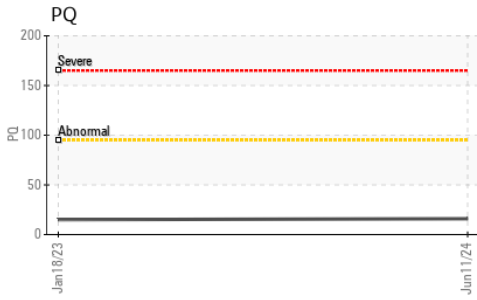

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0211781 **Received** : 18 Jun 2024
Lab Number : 06213691 **Tested** : 20 Jun 2024
Unique Number : 11086555 **Diagnosed** : 20 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

HENDERSON INC
 5806 MOORETOWN RD
 WILLIAMSBURG, VA
 US 23188

Contact: TERRY THOMPSON
 terry@hendersoninc.com

T: (757)603-0418

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)