



WEAR	ATTENTION
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 350G 1FF350GXPKE814095
 Component
Left Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (5 QTS)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.









CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0222266	JR0197457	JR0156509
Sample Date		Client Info		13 Jun 2024	05 Dec 2023	20 Dec 2022
Machine Age	hrs	Client Info		6191	5759	4355
Oil Age	hrs	Client Info		4787	1404	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	SEVERE
PQ		ASTM D8184	>1250	315	335	672
Iron	ppm	ASTM D5185m	>750	970	836	▲ 1986
Chromium	ppm	ASTM D5185m	>9	6	6	▲ 15
Nickel	ppm	ASTM D5185m	>10	<1	<1	3
Titanium	ppm	ASTM D5185m		3	3	9
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	● 23	● 21	● 57
Lead	ppm	ASTM D5185m	>15	0	0	0
Copper	ppm	ASTM D5185m	>40	2	2	4
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>75	▲ 136	▲ 112	▲ 261
Potassium	ppm	ASTM D5185m	>20	1	2	2
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m	>51	2	3	4
Boron	ppm	ASTM D5185m		2	4	17
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	2
Manganese	ppm	ASTM D5185m		8	7	17
Magnesium	ppm	ASTM D5185m		1	0	14
Calcium	ppm	ASTM D5185m		60	14	49
Phosphorus	ppm	ASTM D5185m		2193	2200	1995
Zinc	ppm	ASTM D5185m		22	8	40
Sulfur	ppm	ASTM D5185m		27999	25182	24161
Visc @ 40°C	cSt	ASTM D445		173	187	172

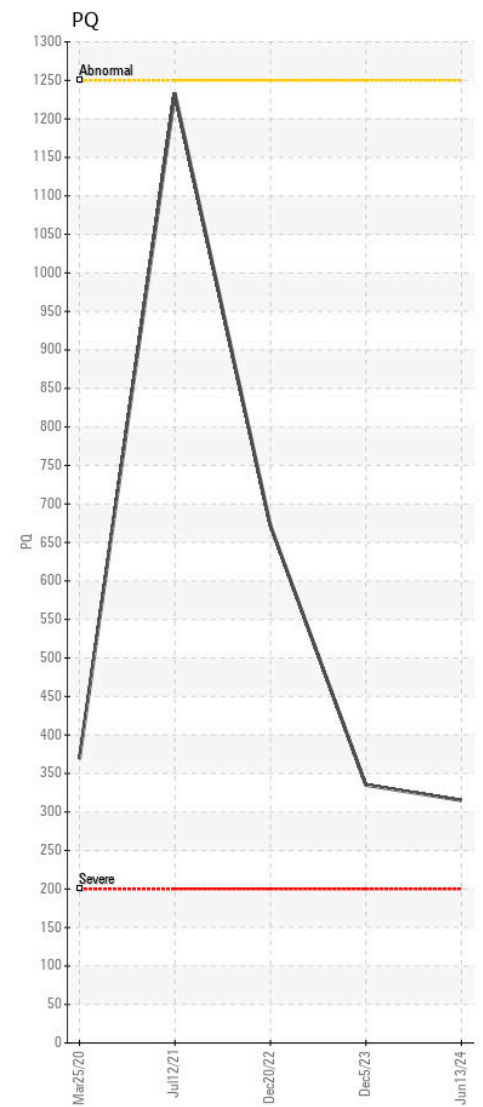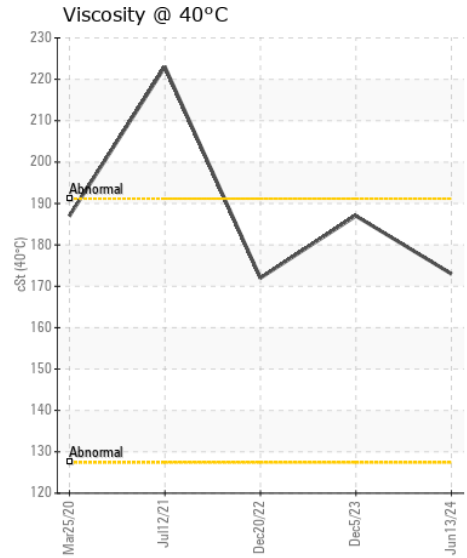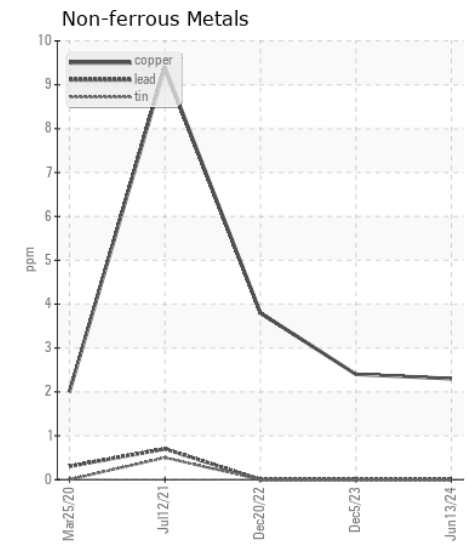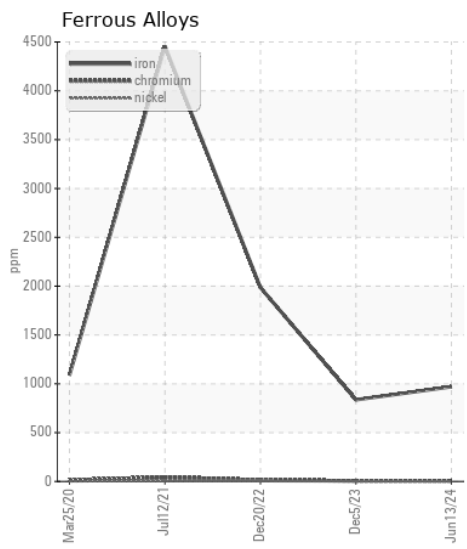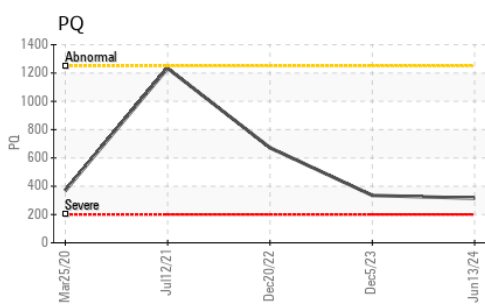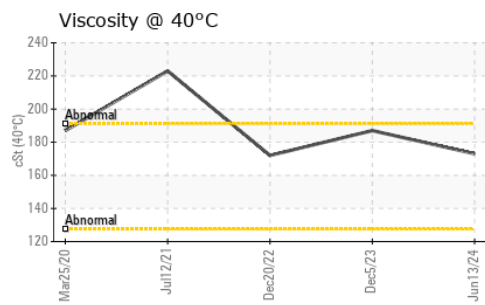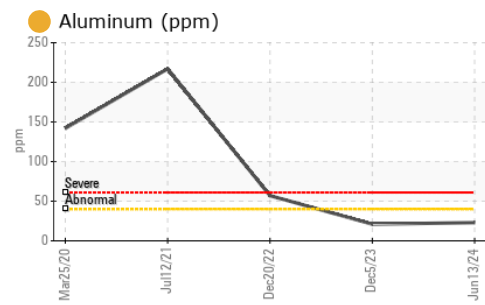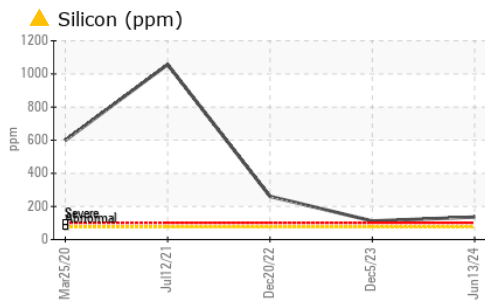

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0222266

Lab Number : 06213700

Unique Number : 11086564

Test Package : CONST (Additional Tests: PQ)

Received : 18 Jun 2024

Tested : 20 Jun 2024

Diagnosed : 20 Jun 2024 - Sean Felton

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GREENVILLE

3604 HIGHWAY 264 E

GREENVILLE, NC

US 27834-5800

Contact: GREENVILLE SHOP

christopher.martin@jamesriverequipment.com

T:

F: