



WEAR	SEVERE
CONTAMINATION	SEVERE
FLUID CONDITION	NORMAL

Area
[W52559]

Machine Id
JOHN DEERE 333E 1T0333EMCGE298722

Component
Left Final Drive

Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

WEAR

Gear wear is indicated.










CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. The water content is negligible.

FLUID CONDITION

The oil is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0211769	---	---
Sample Date		Client Info		14 Jun 2024	---	---
Machine Age	hrs	Client Info		2036	---	---
Oil Age	hrs	Client Info		1000	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				SEVERE	---	---
PQ		ASTM D8184	>1250	235	---	---
Iron	ppm	ASTM D5185m	>750	▲ 3580	---	---
Chromium	ppm	ASTM D5185m	>9	▲ 32	---	---
Nickel	ppm	ASTM D5185m	>10	▲ 16	---	---
Titanium	ppm	ASTM D5185m		9	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	● 125	---	---
Lead	ppm	ASTM D5185m	>15	0	---	---
Copper	ppm	ASTM D5185m	>40	4	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		2	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>75	▲ 495	---	---
Potassium	ppm	ASTM D5185m	>20	26	---	---
Water	%	ASTM D6304	>0.075	0.188	---	---
ppm Water	ppm	ASTM D6304	>750	1880	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	0.2%	---	---
Sodium	ppm	ASTM D5185m	>51	15	---	---
Boron	ppm	ASTM D5185m		10	---	---
Barium	ppm	ASTM D5185m		4	---	---
Molybdenum	ppm	ASTM D5185m		5	---	---
Manganese	ppm	ASTM D5185m		26	---	---
Magnesium	ppm	ASTM D5185m		12	---	---
Calcium	ppm	ASTM D5185m		55	---	---
Phosphorus	ppm	ASTM D5185m		2128	---	---
Zinc	ppm	ASTM D5185m		45	---	---
Sulfur	ppm	ASTM D5185m		29796	---	---
Visc @ 40°C	cSt	ASTM D445		173	---	---

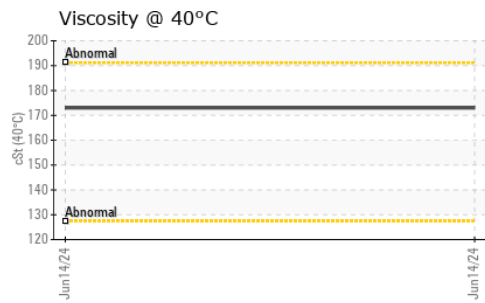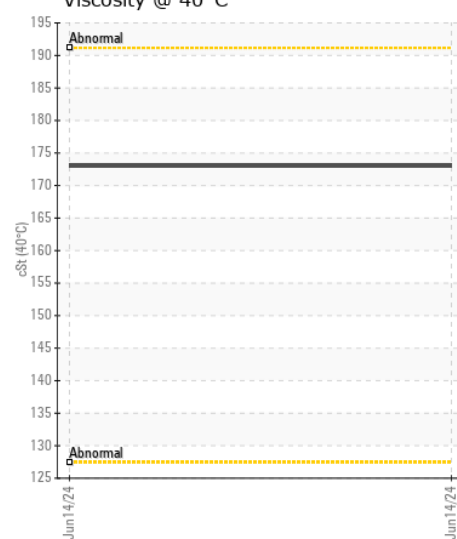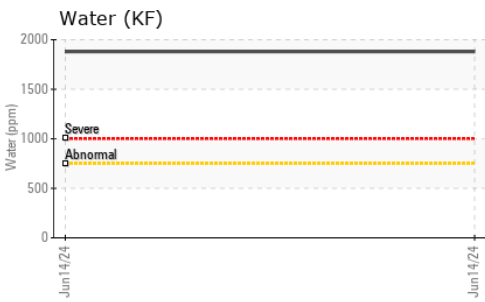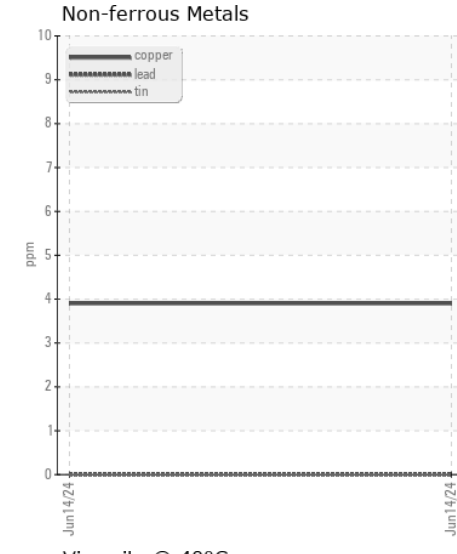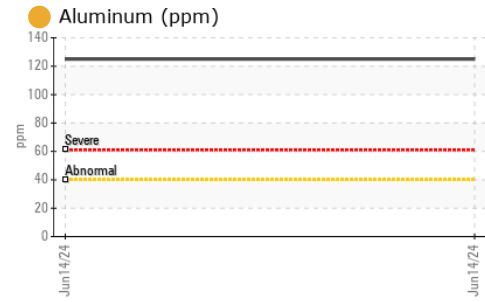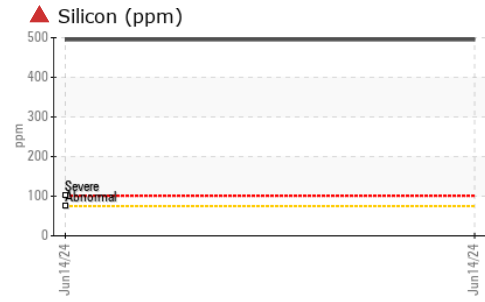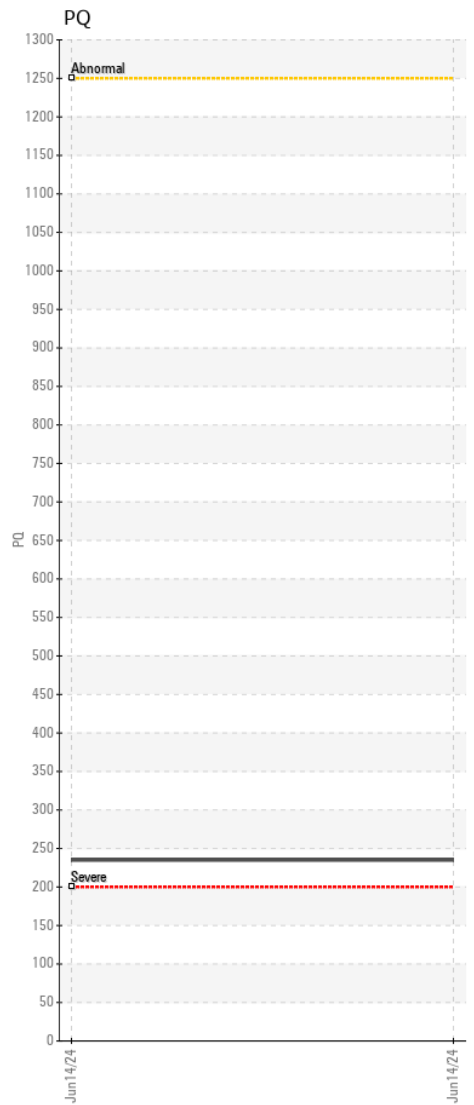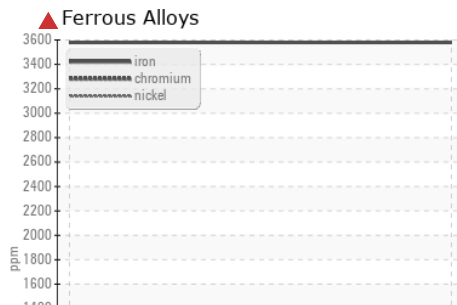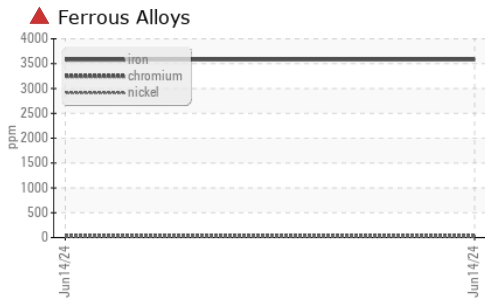

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0211769 **Received** : 18 Jun 2024
Lab Number : 06213704 **Tested** : 20 Jun 2024
Unique Number : 11086568 **Diagnosed** : 20 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: KF, PQ)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)