



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[127282]

Machine Id

JOHN DEERE 460P 1DW460PACPF07027

Component

Front Differential

Fluid

JOHN DEERE HY-GARD HYD/TRANS (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0007776	WE0006971	---
Sample Date		Client Info		14 Jun 2024	20 Mar 2024	---
Machine Age	hrs	Client Info		968	479	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Not Changd	---
Filter Changed		Client Info		N/A	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		18	19	---
Iron	ppm	ASTM D5185m	>500	24	19	---
Chromium	ppm	ASTM D5185m	>10	<1	0	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	2	1	---
Lead	ppm	ASTM D5185m	>25	10	6	---
Copper	ppm	ASTM D5185m	>100	4	2	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	4	4	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Water		WC Method	>.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	6	---
Boron	ppm	ASTM D5185m	6	2	1	---
Barium	ppm	ASTM D5185m	0	4	4	---
Molybdenum	ppm	ASTM D5185m	0	0	0	---
Manganese	ppm	ASTM D5185m		<1	2	---
Magnesium	ppm	ASTM D5185m	145	95	101	---
Calcium	ppm	ASTM D5185m	3570	3425	3617	---
Phosphorus	ppm	ASTM D5185m	1290	1010	1074	---
Zinc	ppm	ASTM D5185m	1640	1205	1271	---
Sulfur	ppm	ASTM D5185m		3508	4206	---
Visc @ 40°C	cSt	ASTM D445	57.0	51.5	53.3	---

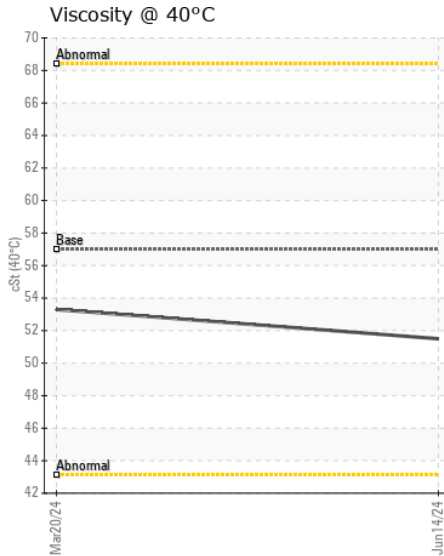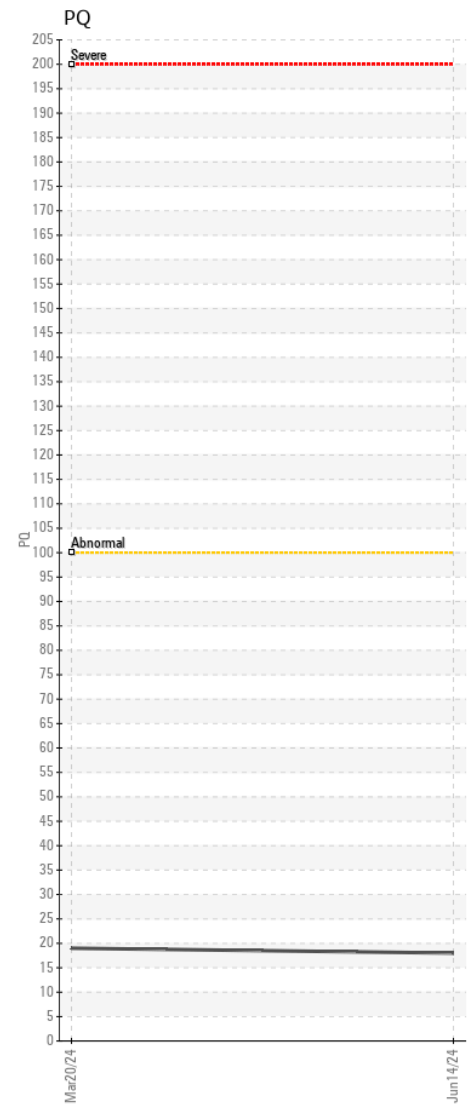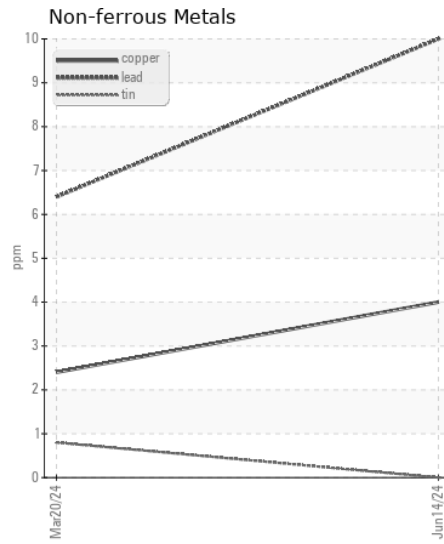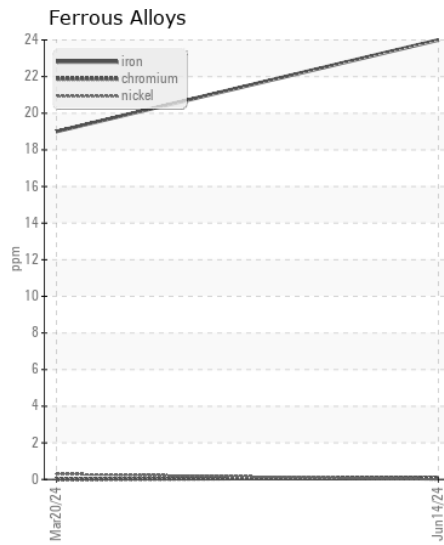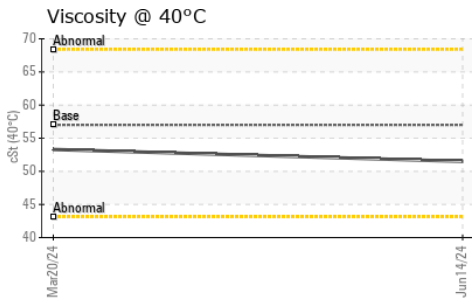

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WE0007776

Lab Number : 06213737

Unique Number : 11086601

Test Package : CONST (Additional Tests: PQ)

Received : 18 Jun 2024

Tested : 20 Jun 2024

Diagnosed : 20 Jun 2024 - Wes Davis

WARRIOR TRACTOR AND EQUIPMENT - NORTHPORT

P.O. BOX 412

NORTHPORT, AL

US 35476

Contact: CRAIG ANDOE

serve01@warriortractor.com

T: (205)339-0300

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)