



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE B07772
 Component
Rear Differential
 Fluid
TDH FLUID SAE 75W80 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) TDH FLUID SAE 75W80. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0205813	---	---
Sample Date		Client Info		15 Jun 2024	---	---
Machine Age	hrs	Client Info		547	---	---
Oil Age	hrs	Client Info		547	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Test	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		22	---	---
Iron	ppm	ASTM D5185m	>500	18	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>100	2	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION






There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>75	4	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m	10	3	---	---
Barium	ppm	ASTM D5185m	10	3	---	---
Molybdenum	ppm	ASTM D5185m	10	0	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	100	110	---	---
Calcium	ppm	ASTM D5185m	3500	3872	---	---
Phosphorus	ppm	ASTM D5185m	1150	1167	---	---
Zinc	ppm	ASTM D5185m	1150	1424	---	---
Sulfur	ppm	ASTM D5185m	5000	4329	---	---
Visc @ 40°C	cSt	ASTM D445	48	51.8	---	---

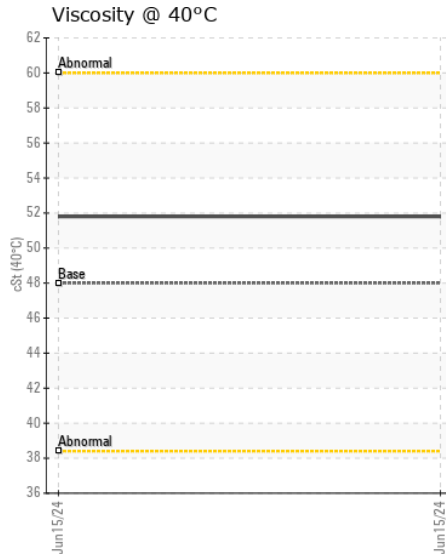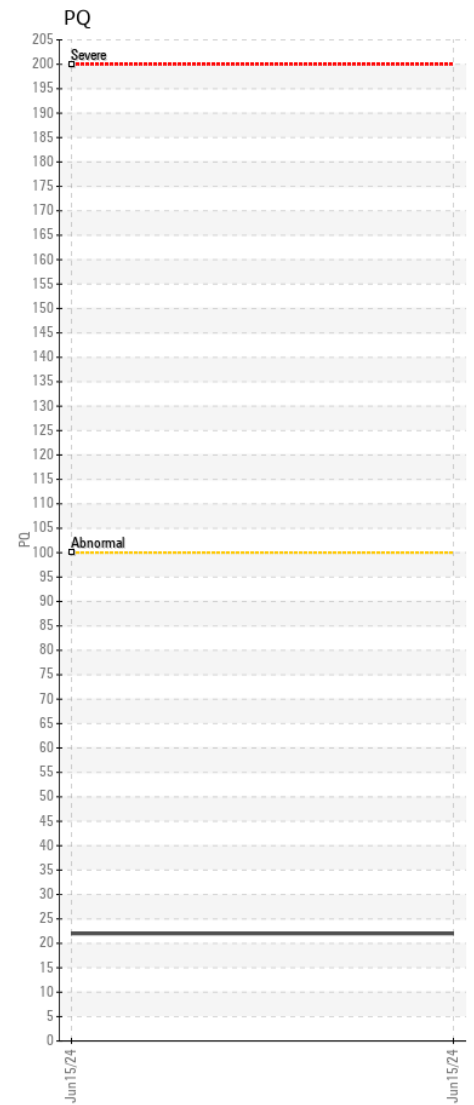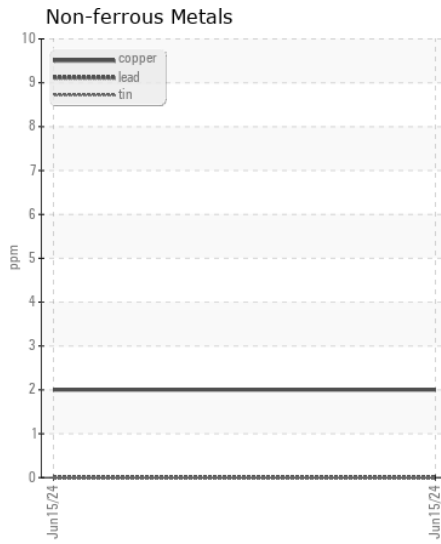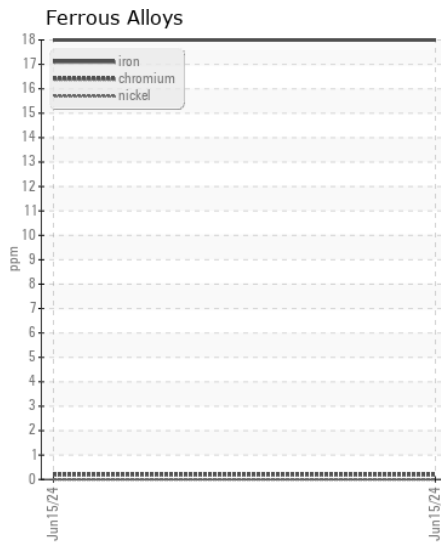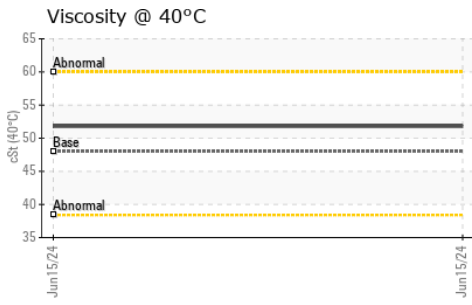

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0205813

Lab Number : 06213774

Unique Number : 11086638

Test Package : CONST (Additional Tests: PQ)

Received : 18 Jun 2024

Tested : 20 Jun 2024

Diagnosed : 20 Jun 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - CHARLOTTE

9550 STATESVILLE ROAD

CHARLOTTE, NC

US 28269

Contact: Ray Benson

ray.benson@jamesriverequipment.com

T:

F: (704)596-6198